




STANDARD PRODUCTS CATALOG 2024

marathon™
Special Products

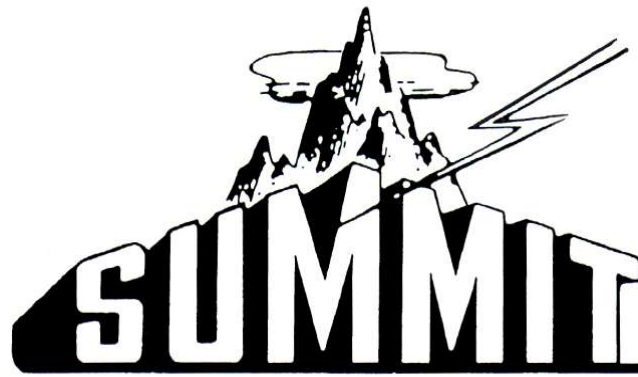

GIBSON STAINLESS
& SPECIALTY INC



R.S. DALE CO. INC
STRUT FITTINGS

SteelElectric
PRODUCTS



INTERNATIONAL
SEAL HOSE COMPANY



Plymouth

SPARKSAFE
Electrical Products

COPE
SUPPLY INC.

LINEMASTER®
AMERICA'S FOOT SWITCH LEADER

PLYON™

COZY
PRODUCTS®



picoma®

nsi
INDUSTRIES

CNFIT™



Summit Electric Products Ltd.

3333 Devon Drive, Windsor ON N8X 4L5

Toll Free: 1-800-265-4822

Tel: 1-519-250-8820 Fax: 1-519-250-8389

sales@summit-electric.com

www.summit-electric.com



Summit Electric Products has three separate divisions all rolled into one

Standard Products Division

At Summit Electric, we serve as a Canadian distribution centre for many U.S. manufacturers.

In doing so, we provide the customer service, warehousing
and logistics for all of our U.S. partners.

We pride ourselves in our commitment to maintaining extensive inventory levels and
exceptional product knowledge.

Many of the products can be found in this booklet

Specialty Imports

Summit Electric specializes in finding hard to get and obsolete electrical items.

Often you may find yourself in a situation where you have a requirement from a manufacturer
that you have never heard of or are not authorized to purchase from.

This is where we can help. We import electrical items from the USA daily.

We handle all the incoming freight, duty, brokerage and duty exchange
and quote you in NET Canadian dollars.

This both frees up your time and lets you know your true landed cost.

New Surplus Inventory Division

Summit Electric has a vast inventory of surplus electrical material from several
manufacturers such as Appleton, Burndy, Crouse Hinds, Hubbell, OZ/Gedney and T&B.

Our exclusive inventory of surplus material consists of new and left over material from a
variety of our trusted partners with many of these items in their original factory packaging.

Also as a Summit Electric Products client, your access to surplus inventory is not limited only
to what is in our warehouse. We can also provide access to an abundance of surplus
material from the United States as well.

Summit Electric Products Ltd. sells exclusively to wholesale electrical distributors.

**We break Packaging
Same Day Shipments**

Index

Beam Clamps, Hangers and U-Bolts	51-52
Conduit Elbows, Nipples, Couplings	36,58-62,61-62
• Aluminum	58-60
• EMT (elbows)	36
• Rigid (nipples & couplings)	56-58
• Stainless Steel	61-62
Control Switches	21
Dock Loading Lights	27
EMT Fittings	36-38
• Conduit Bodies	36-37
• Conduit Elbows	36
• Couplings & Connectors – Raintight & Set Screw	38
• EMT to Flex Connectors	37
• EMT to Rigid Connectors	37
• Offset Connectors	37
• Pipe Straps	36
• Pull Elbows	37
Explosion Proof Fittings	52
Flexible Conduit & Connectors	55
Foot Switches	23-24
Grounding Clamps & Grounding Lugs	35
Heat Shrink Products	28-29
• Busbar Insulating Tubing	29
• Breakout Boots	28
• End Caps	28
• Heavy Wall Tubing	28
• Teck Cable Splice Kits	28
• Wraparound Cable Support Sleeves	29
Lugs & Sleeves	31-34
• Adapters	33
• Aluminum Compression	32-33
• Copper Compression	31-32
• Mechanical	34
Marathon Special Products	1-20
• Power Blocks	1-15
Bulk Fastening	9
Covers	15
High Voltage	10-11
Miscellaneous Configurations	12
Splicer & Distribution	1-6
Splicer & Distribution (Enclosed)	7-8
Stud Configurations	13-15
• Terminal Blocks	16-20
Dead Front	19
Double Row	20
Heavy Duty	16-18
Radiant Heating Products	27
Retractable Cords	22

Index

Rigid Fittings	39-50
• 3 Piece Couplings	43
• Bushings – Grounding, Malleable Iron, Plastic	40
• Chase Nipples	42
• Compression Couplings & Connectors	46
• Conduit Bodies	49
• Device Boxes & Covers	50
• Enlargers	44
• Floor Flanges	44
• Hole Seals & Knock Outs	42
• Hubs	45
• Locknuts – Aluminum, Steel, Sealing	41
• Offset Nipples	41
• O-Rings	39
• Pull Elbows	45
• Reducing Bushings & Washers	47-48
• Service Entrance Heads	43
• Set Screw Couplings & Connectors	46
• Straps & Clamp Backs	43-44
• Strain Relief Connectors	39,68
• Swivel Fixture Hangers	40
Sealtite (Liquid-Tight) Connectors & Conduit	53-54,65
• Connectors	53-54,65
Zinc Die-Cast	53
Malleable Iron	53-54
Stainless Steel	65
• Liquid-Tight Conduit	54
Stainless Steel Products	61-70
• 3 Piece Couplings	64
• Beam Clamps	65
• Bushings	67
• Chase Nipples	64
• Conduit Bodies	62
• Conduit, Couplings, Nipples, Elbows	61-62
• Conduit Caps	63
• Device Boxes & Covers	64
• Floor Flanges	63
• EYS Fittings	67
• Hangers	65
• Hazardous Location EYS & Junction Boxes	67
• Hubs	62
• Locknuts	64
• Pull Elbows	63
• Reducing Bushings	66
• Sealtite (Liquid-Tight) Connectors	65
• Strain Relief Connectors	68
• Strain Relief Grips	68
• Straps & Spacers	63
• Strut & Strut Fittings	69-70
• Threaded Plugs	66
• U-Bolts	69


Index

Standoff Insulators	24
Stop & Go Lights	26
Strut Fittings	71-76
• Angle Fittings	71-72
• Beam Clamps	73
• Brackets	74
• Clamping Nuts	71
• Flat Fittings	71
• Miscellaneous Fittings	74
• Pipe and Cable Clamps	76
• Pipe Straps	75
• Post Bases	72
• Trolleys	74
• U Supports, Z Fittings & Joiners	72
Tape	25-26
• Arc & Fireproofing	26
• Dacron Glass (Varnished)	26
• Filler	26
• Friction	25
• Glass Cloth	26
• High Voltage	25
• Rubber	25
• Shielding	26
• Silicone	26
• Tinned Copper Shielding Braid	25
• Tinned Copper Shielding Tape	25
• Underground Marking	26
• Vinyl	25
Thread Adapters – Metric to NPT and PG to NPT	35
Toggle Switches	30
Wire Mesh Grips	29-30,68
• Pulling	30
• Strain Relief	29
• Strain Relief - Stainless Steel	68
• Support	29
• Support - Stainless Steel	30,68
Numerical Index	77-82

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Electrical

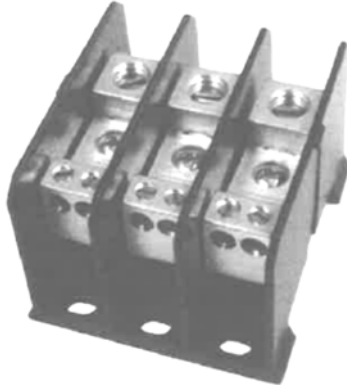

- 60 - 2280 amps
- 600 volts AC/DC (UL)
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details
- Listed products provide feeder circuit terminal spacing

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - o Thermoplastic: 125°C (257°F) - UL RTI
 - o Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL listed - or - UL recognized
 - o Listed file no. QPQS.E309401 (UL 1953)
 - o Recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)



Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
60	1/2/3/4	141x403	Plastic	AL	#2 - #14	1		#10 - #18	2	
115	1/2/3/4	141x300	Plastic	AL	#2 - #14	1		#2 - #14	1	
	1/2/3	142x552	Phenolic	AL	#2 - #14	1		#2 - #14	1	
	1/2/3/4	141x400	Plastic	AL	#2 - #14	1		#10 - #18	4	
150	1/2/3	142x121	Phenolic	CU	1/0 - #14	1		1/0 - #14	1	
175	0/1/2/3	132x572CH	Plastic	AL	2/0 - #14	1		2/0 - #14	1	
	1/2/3	142x572	Phenolic	AL	2/0 - #14	1		2/0 - #14	1	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (X) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
175	1/2/3	132x972CH	Plastic	CU	2/0 - #14	1		2/0 - #14	1	
	0/1/2/3	132x570CH	Plastic	AL	2/0 - #14	1		#4 - #14	4	
	1/2/3	142x570	Phenolic	AL	2/0 - #14	1		#4 - #14	4	
	0/1/2/3	132x580CH	Plastic	AL	2/0 - #14	1		#4 - #14	6	
	2/3	140x402	Phenolic	AL	2/0 - #14	1		#4 - #14	4	
	2/3	140x401	Phenolic	AL	2/0 - #14	1		#4 - #14	6	
	0/1/2/3	132x970CH	Plastic	CU	2/0 - #14	1		#4 - #14	4	
	1/2/3	142x970	Phenolic	CU	2/0 - #14	1		#4 - #14	4	
	3	1343580	Plastic	AL	2/0 - #14	1		#4 - #14	6	
200	3	1343570	Plastic	AL	3/0 - #14	1		#2 - #14	4	
	3	1343572	Plastic	AL	3/0 - #14	1		3/0 - #14	1	
	3	1343548	Plastic	AL	3/0 - #14	1		#6 - #14 #2 - #14	6 2	
255	1/2/3	143x124	Phenolic	CU	250 - #6	1		250 - #6	1	
	1/2/3	143x123	Phenolic	AL	250 - #6	1		250 - #6	1	
	2/3	140x801	Phenolic	CU	250 - #6	1		250 - #6	1	
310	2/3	140x303	Phenolic	AL	350 - #6	1		350 - #6	1	
	1/2/3	143x126	Plastic	AL	350 - #6	1		350 - #6	1	
	1/2/3	133x126CH	Plastic	AL	350 - #6	1		350 - #6	1	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
310	3	1343582	Plastic	AL	350 - #6	1		350 - #6	1	
	2/3	140x404	Phenolic	AL	350 - #6	1		#4 - #14	6	
	1/2/3	133x554CH	Plastic	AL	350 - #6	1		2/0 - #14	2	
	2/3	140x410	Phenolic	AL	350 - #6	1		2/0 - #14	2	
	1/2/3	143x554	Phenolic	AL	350 - #6	1		2/0 - #14	2	
	1/2/3	133x324CH	Plastic	AL	350 - #6	1		#8 - #14	24	
335	1/2/3	144x401	Phenolic	AL	400 - #6	1		#2 - #14	6	
	1/2/3	143x552	Phenolic	AL	400 - #6	1		#2 - #14	4	
	1/2/3	143x553	Phenolic	AL	400 - #6	1		#2 - #14	6	
	3	1343553	Plastic	AL	400 - #6	1		#2 - #14	6	
	1/2/3	144x560	Phenolic	AL	400 - #6	1		#2 - #14	8	
	1/2/3	133x552CH	Plastic	AL	400 - #6	1		#2 - #14	4	
350	1/2/3	133x305CH	Plastic	AL	2/0 - #14	2		2/0 - #14	2	
	1/2/3	143x306	Phenolic	AL	2/0 - #14	2		2/0 - #14	2	
	1/2/3	143x555	Phenolic	AL	2/0 - #14	2		#4 - #14	6	
	1/2/3	133x555CH	Plastic	AL	2/0 - #14	2		#4 - #14	6	
	3	1343555	Plastic	AL	2/0-#14	2		#4 - #14	6	
	1/2/3	143x955	Phenolic	CU	2/0 - #14	2		#4 - #14	6	


Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (X) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
350	1/2/3	133x955CH	Plastic	CU	2/0 - #14	2		#4 - #14	6	
380	1/2/3	143x953	Phenolic	CU	500 - #4	1		#2 - #14	6	
	1/2/3	133x953CH	Plastic	CU	500 - #4	1		#2 - #14	6	
	1/2/3	144x551	Phenolic	AL	500 - #4	1		#2 - #14	6	
	1/2/3	145x579	Phenolic	AL	500 - #4	1		2/0 - #14	6	
380	1/2/3	133x587CH	Plastic	AL	500 - #4	1		#2 - #14 350 - #6	3 1	
	1/2/3	143x587	Phenolic	AL	500 - #4	1		#2 - #14 350 - #6	3 1	
	1/2/3	145x594	Phenolic	AL	500 - #4	1		#2 - #14	8	
	1/2/3	145x552	Phenolic	AL	500 - #4	1		#2 - #14	12	
420	1/2/3	144x557	Phenolic	AL	600 - #4	1		600 - #4	1	
	1/2/3	133x360CH	Plastic	AL	600 - #2	1		600 - #2	1	
	1/2/3	133x588CH	Plastic	AL	600 - #2	1		#2 - #14 1/0 - #14	6 3	
	3	1343588	Plastic	AL	600 - #2	1		#2 - #14 1/0 - #14	6 3	
	1/2/3	133x595CH	Plastic	AL	600 - #2	1		#4 - #14	12	
	3	1343595	Plastic	AL	600 - #2	1		#4 - #14	12	
	1/2/3	133x585CH	Plastic	AL	600 - #2	1		#2 - #14	8	
	3	1343585	Plastic	AL	600 - #2	1		#2 - #14	8	
	1/2/3	133x575CH	Plastic	AL	600 - #2	1		2/0 - #14	4	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
420	1/2/3	133x565CH	Plastic	AL	600 - #2	1		250 - #6	2	
	1/2/3	135x601CH	Plastic	AL	600 - #2	1		#6 - #14	24	
475	1/2/3	135x701CH	Plastic	AL	750 - 1/0	1		750 - 1/0	1	
510	1/2/3	133x320CH	Plastic	AL	250 - 1/0	2		250 - 1/0	2	
	1/2/3	133x596CH	Plastic	AL	250 - 1/0	2		#4 - #14	12	
	3	1343596	Plastic	AL	250 - 1/0	2		#4 - #14	12	
	1/2/3	133x597CH	Plastic	AL	250 - 1/0	2		#2 - #14	8	
	3	1343597	Plastic	AL	250 - 1/0	2		#2 - #14	8	
	1/2/3	133x598CH	Plastic	AL	250 - 1/0	2		2/0 - #14	4	
620	1/2/3	145x129	Phenolic	AL	350 - #4	2		350 - #4	2	
	1	1331348CH	Plastic	AL	350 - #4	2		#8 - #14	48	
760	1/2/3	145x301	Phenolic	AL	500 - #4	2		500 - #4	2	
	1/2/3	145x592	Phenolic	AL	500 - #4	2		#4 - #14	12	
	1/2/3	145x586	Phenolic	AL	500 - #6	2		2/0 - #14	8	
	1/2/3	145x992	Phenolic	CU	500 - #4	2		#2 - #14	12	
	1/2/3	145x986	Phenolic	CU	500 - #4	2		2/0 - #14	8	
	1/2/3	145x408	Phenolic	AL	500 - #6	2		#2 - #14	12	
840	1/2/3	145x411	Phenolic	AL	600 - #2	2		3/0 - #6 #4 - #14	4 4	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
950	1/2/3	135x605CH * see note below	Plastic	AL	600 - #2	2		350 - #4	4	
	1/2/3	135x702CH * see note below	Plastic	AL	750 - 1/0	2		750 - 1/0	2	
	1/2/3	135x703CH * see note below	Plastic	AL	750 - 1/0	2		250 - #6	6	
	1/2/3	135x704CH * see note below	Plastic	AL	750 - 1/0	2		2/0 - #14	10	
	1/2/3	135x705CH * see note below	Plastic	AL	750 - 1/0	2		#2 - #14 250 - #6	12 3	
	1/2/3	135x706CH * see note below	Plastic	AL	750 - 1/0	2		#2 - #14 250 - #6	4 5	
	1/2/3	135x707CH * see note below	Plastic	AL	750 - 100	2		#2 - #14 3/0 - #6	12 4	
	1/2/3	135x708CH * see note below	Plastic	AL	750 - 1/0	2		3/0 - #6	8	
2280	1	1453401 ** see note below	Phenolic	AL	500 - #4	6		2/0 - #14	18	

*UL Recognized to US and Canadian Standards (cULus).

**Special 1 Pole Power Block with the Dimensions of a 3 Pole 145 Series Power Block

Power Blocks - Marathon Special Products

Splicer & Distribution - Enclosed Power Blocks (EPB)



Electrical

- 115 - 760 amps
- 600 volts AC/DC (UL)
- Up to 1000 volts (IEC) - reference data sheets
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details
- Listed products provide feeder circuit terminal spacing

Mechanical

- Insulator - thermoplastic: 125°C (257°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable and/or DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL listed - or - UL recognized
 - o Listed file no. QPQS.E309401 (UL 1953)
 - o Recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- IEC 60529, IP-20
- RoHS compliant (all)

Amps	Catalog Number	Mounting Style	Max SCCR	Conn. Material	Line Side			Load Side		
					Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
115	EPBAD21	Both DIN & Panel	100,000	AL	#2 - #14	1		#2 - #14	1	
	EPBAD24	Both DIN & Panel	65,000	AL	#2 - #14	1		#10 - #18	4	
200	EPBAD42	DIN	100,000	AL	3/0 - #14	1		3/0 - #14	1	
	EPBAP42	Panel								
	EPBCD42	DIN	100,000	CU						
	EPBCP42	Panel								

Power Blocks - Marathon Special Products

Splicer & Distribution - Enclosed Power Blocks (EPB)

Amps	Catalog Number	Mounting Style	Max SCCR	Conn. Material	Line Side			Load Side		
					Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
200	EPBAD45	DIN	100,000	AL	3/0 - #14	1		#2 - #14	4	
	EPBAP45	Panel								
	EPBCD45	DIN	100,100	CU				#6 - #14 #2 - #14	6 2	
	EPBCP45	Panel								
	EPBAP48	Panel	100,000	AL				#6 - #14 #2 - #14	6 2	
	EPBAD48	Din	100,000	AL						
335	EPBAD74	DIN	10,000	AL	400 - #6 2/0 - #14	1 1		#2 - #14	8	
	EPBAP74	Panel	100,000							
	EPBCD74	DIN	10,000	CU						
	EPBCP74	Panel	100,000							
510	EPBAD71	DIN	10,000	AL	250 - #6	2		250 - #6	2	
	EPBAP71	Panel	100,000							
	EPBCD71	DIN	10,000	CU						
	EPBCP71	Panel	100,000							
760	EPBAP81	Panel	100,000	AL	500 - #4	2		500 - #4	2	
	EPBAP84			CU				2/0 - #14	8	
	EPBCP84									
				EPBAP86					AL	

Power Blocks - Marathon Special Products

Bulk Fastening Power Blocks (BFPB)

Electrical

- 1605 amps
- 1000 volts AC/DC (cULus)
- Multiple wire rating - refer to data sheets for details
- Provides feeder circuit terminal spacing

Mechanical

- Insulator - thermoplastic: 125°C (257°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable

Features / Benefits

- Modular construction to accommodate numerous terminal options
- Available for 2 to 6 stud terminal positions
- Accommodates power distribution options for listed lugs sized up to 1000kcmil
- First power terminal block to have a high SCCR rating (35k) with no over current protection device
- Reliably terminates flexible stranded classes of wire with crimp lugs
- Suitable to terminate and distribute power with flexible bus bar

Standards

- UL recognized file no. XCFR2.E62806 (UL 1059)
- cUR recognized file no. XCFR8.E62806 (UL 1059)
- RoHS compliant (all)



Catalog Number	Stud Positions	Stud Size	Cover Part Number
BFPB-50-2-2	2	1/2"	CC-BFPB-2-2
BFPB-50-2-3	3		CC-BFPB-2-3
BFPB-50-2-4	4		CC-BFPB-2-4
BFPB-50-2-5	5		CC-BFPB-2-5
BFPB-50-2-6	6		CC-BFPB-2-6
BFPB-37-1-3	3	3/8"	CC-BFPB-1-3
BFPB-37-1-4	4		CC-BFPB-1-4
BFPB-37-1-5	5		CC-BFPB-1-5
BFPB-37-1-6	6		CC-BFPB-1-6

Power Blocks - Marathon Special Products

High Voltage Power Blocks (HVPB)



Electrical

- 350 - 950 amps
- 1500 volts AC/DC (UL)
- Provides feeder circuit terminal spacing at 600V
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, thermoplastic
- Insulator temp-rating: 110°C (230°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable
- Modular construction for multi-pole configurations

Standards

- See datasheets for product specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- cUR recognized file no. XCFR8.E62806 (UL 1059)
- RoHS compliant



Amps	Catalog Number	Conn. Temp Rating	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
350	HVPB105	90°C	Plastic	AL	Stud, M10	1		#10 - #14 (a)	24	
420	HVPB108	75°C	Plastic	AL	600 - #2	1		#4 - #14	12	
	HVPB109	75°C	Plastic	AL	600 - #2	1		600 - #2	1	
430	HVPB101	90°C	Plastic	AL	Stud, M10	1		#6 - #14 (b)	12	
	HVPB103	90°C	Plastic	AL	Stud, M10	1		#4 - #14 (c)	8	





(a) suitable for #8 AWG, limited to 40A per wire, copper only

(b) suitable for #4 AWG, limited to 75A per wire, copper only

(c) suitable for #2 AWG, limited to 95A per wire, copper. 75A per wire, aluminum

Power Blocks - Marathon Special Products

High Voltage Power Blocks (HVPB)


Amps	Catalog Number	Conn. Temp Rating	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
430	HVPB107	90°C	Plastic	CU	Stud, M10	1		Stud, M10	1	
	HVPB208	90°C	Plastic	CU	Stud, 1/2-13 x 1.44	1		Stud, 1/2-13 x 1.44	1	
750	HVPB112	90°C	Plastic	CU	Stud, 3/8"	1		Stud, 3/8"	1	
	HVPB114	90°C	Plastic	CU	Stud, 1/2"	1		Stud, 1/2"	1	
760	HVPB210	75°C	Plastic	AL	500 - #4	2		#2 - #14	12	
	HVPB211	75°C	Plastic	AL	500 - #4	2		2/0 - #14	8	
860	HVPB205	90°C	Plastic	AL	Stud, M10	1		#4 - #14 (c)	16	
	HVPB207	90°C	Plastic	AL	Stud, M10	2		#4 - #14 (c)	16	
	HVPB201	90°C	Plastic	AL	Stud, M10	1		#6 - #14 (b)	24	
	HVPB203	90°C	Plastic	AL	Stud, M10	2		#6 - #14 (b)	24	
950	HVPB602	90°C	Plastic	AL	600 - #2	2		600 - #2	2	
1500	HVPB212	90°C	Plastic	CU	Stud, 3/8"	2		Stud, 3/8"	2	
	HVPB214	90°C	Plastic	CU	Stud, 1/2"	2		Stud, 1/2"	2	

(a) suitable for #8 AWG, limited to 40A per wire, copper only

(b) suitable for #4 AWG, limited to 75A per wire, copper only

(c) suitable for #2 AWG, limited to 95A per wire, copper. 75A per wire, aluminum

CH1331	Snap-on Cover for HVPB1 Series
CH1332	Snap-on Cover for HVPB2 Series



Power Blocks - Marathon Special Products

Power Blocks - Miscellaneous Configurations



Electrical

- 115 - 200 amps
- 600 volts AC/DC (cULus)
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - Thermoplastic: 125°C (257°F) - UL RTI
 - Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)

Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
115	1/2/3/4	141x201	Plastic	AL	#2 - #14	1		#10-32 Tapped Hole	1	
	1/2/3/4	141x202	Plastic	AL	#2 - #14	1		1/4 Quick Connects	4	
	1/2/3/4	141x205	Plastic	AL	#2 - #14	1		1/4 Quick Connects & #10-32 Tap	2/1	
	1/2/3/4	141x301	Plastic	AL	#2 - #14	1		#2 - #14 & 1/4 Quick Connects	1/1	
175	1/2/3	142x553	Phenolic	AL	2/0 - #14	1		1/4-20 Tapped Hole	1	
	1/2/3	132x579CH	Plastic	AL	2/0 - #14	1		#2 - #14 & 1/4 Quick Connect	1/1	
	1/2/3	132x670CH	Plastic	AL	2/0-#14	1		#4 - #14 & 1/4 Quick Connect	4/1	
200	1/2/3	142x123	Phenolic	CU	1/4-20 Screw	1		1/4-20 Screw	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations



Electrical

- 115 - 1680 amps
- 600 volts AC/DC (UL)
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - Thermoplastic: 125°C (257°F) - UL RTI
 - Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)

Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
115	1/2/3/4	141x203	Plastic	AL	#2 - #14	1		#10-32 x .60	1	
175	0/1/2/3	132x574CH	Plastic	AL	2/0 - #14	1		1/4-20 x .50	1	
	0/1/2/3	132x474CH	Plastic	AL	2/0 - #14	1		M6 x 13	1	
	1/2/3	142x574	Phenolic	AL	2/0 - #14	1		1/4-20 x .50	1	
	1/2/3	143x590	Phenolic	AL	2/0 - #14	1		1/4-20 x 1.38	1	
200	0/1/2/3	132x122CH	Plastic	CU	1/4-20 x .56	1		1/4-20 x .56	1	
	0/1/2/3	132x422CH	Plastic	CU	M6 x 15	1		M6 x 15	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
200	1/2/3	142x122	Phenolic	CU	1/4-20 x .56	1		1/4-20 x .56	1	
230	1/2/3	143x563	Phenolic	CU	3/8-16 x 1.18	1		3/8-16 x 1.18	1	
	1/2/3	143x561	Phenolic	CU	3/8-16 x 1.18	1		1/4-20 x 1.38	1	
	1/2/3	144x553	Phenolic	CU	3/8-16 x 1.44	1		3/8-16 x 1.44	1	
260	1/2/3	144x122	Phenolic	CU	3/8-16 x 1.44	1		1/4-20 x .56	2	
310	1/2/3	133x564CH	Plastic	CU	M10 x 30	1		M10 x 30	1	
	1/2/3	133x563CH	Plastic	CU	3/8-16 x 1.18	1		3/8-16 x 1.18	1	
	1/2/3	143x559	Phenolic	AL	350 - #6	1		3/8-16 x 1.13	1	
	1/2/3	133x559CH	Plastic	AL	350 - #6	1		3/8-16 x 1.25	1	
	1/2/3	133x558CH	Plastic	AL	350 - #6	1		M10 x 30	1	
360	1/2/3	145x573	Phenolic	CU	3/8-16 x 1.44	1		3/8-16 x 1.44	2	
	1/2/3	145x583	Phenolic	CU	3/8-16 x 1.44	1		1/4-20 x 1.44	2	
380	1/2/3	144x569	Phenolic	AL	500 - #4	1		1/4-20 x 1.06	2	
	1/2/3	144x575	Phenolic	AL	500 - #4	1		3/8-16 x 1.31	1	
410	1/2/3	145x606	Phenolic	CU	1/2-13 x 1.44	1		1/2-13 x 1.44	1	
	1/2/3	133x611CH	Plastic	CU	1/2-13 x 1.38	1		1/2-13 x 1.38	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
475	1/2/3	145x613	Phenolic	CU	3/8-16 x 1.44	2		3/8-16 x 1.44	1	
510	1/2/3	133x272CH	Plastic	AL	3/8-16 x 1.19	1		#4 - #14	12	
	1/2/3	133x280CH	Plastic	AL	3/8-16 x 1.19	1		#2 - #14	8	
	1/2/3	133x270CH	Plastic	AL	3/8-16 x 1.19	1		2/0 - #14	4	
760	1/2/3	145x282	Phenolic	AL	3/8-16 x 1.00	2		2/0 - #14	8	
	1/2/3	145x599	Phenolic	AL	500 - #4	2		3/8-16 x 1.31	2	
	1/2/3	145x610	Phenolic	AL	500 - #4	2		1/2-13 x 1.31	1	
840	1/2/3	144x614	Phenolic	CU	3/8-16 x 1.00	1		3/8-16 x 1.00	1	
1680	1/2/3	145x615	Phenolic	AL	600 - #4	4		1/2-13 x 1.56	1	

Power Block Covers

Series	Type	Catalog # Substitute (X) for # of poles	Poles	Figure #
132	SNAP-ON	CH132x	1/2/3	3
133	SNAP-ON	CH133x	1/2/3	3
134	SNAP-ON	CH1343	3	4
135	SNAP-ON	CH1351	1	5
140	SCREW-ON	CC140x	2/3	1

Series	Type	Catalog # Substitute (X) for # of poles	Poles	Figure #
141	SNAP-ON	CC141x	1/2/3/4	2
142	SCREW-ON	CC142x	1/2/3	1
143	SCREW-ON	CC143x	1/2/3	1
144	SCREW-ON	CC144x	1/2/3	1
145	SCREW-ON	CC145x	1/2/3	1




FIGURE 1




FIGURE 2




FIGURE 3




FIGURE 4




FIGURE 5

Heavy Duty Terminal Blocks - Marathon Special Products

1500 Series (Barrier Type) – 5/8" line-to-line spacing









Specifications

- 75 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 5/8" (.625") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .50"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

						
Poles	Standard connector with serrations for anti-rotation	Removable connector with brass insert	10-32 stud, removable connector	Short circuit bar with brass insert, 4 shorting pins per block	Standard connector with hinge cover	Multiple circuit jumper
2	1502STD	1502DJ	1502ST	1502SC	1502H	1502MCJ
4	1504STD	1504DJ	1504ST	1504SC	1504H	1504MCJ
6	1506STD	1506DJ	1506ST	1506SC	1506H	1506MCJ
8	1508STD	1508DJ	1508ST	1508SC	1508H	1508MCJ
12	1512STD	1512DJ	1512ST	1512SC	1512H	1512MCJ

Clear Cover Catalog # Substitute (xx) for # of poles	White Cover Catalog # Substitute (xx) for # of poles
CC15xx	CW15xx

Heavy Duty Terminal Blocks - Marathon Special Products

1600 Series (Barrier Type) – 21/32" line-to-line spacing









Specifications

- 75 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 21/32" (.656") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .50"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

						
Poles	Standard connector with serrations for anti-rotation	Removable connector with brass insert	10-32 stud, removable connector	Short circuit bar with brass insert, 4 shorting pins per block	Standard connector with hinge cover	Multiple circuit jumper
2	1602STD	1602DJ	1602ST	1602SC	1602H	1602MCJ
4	1604STD	1604DJ	1604ST	1604SC	1604H	1604MCJ
6	1606STD	1606DJ	1606ST	1606SC	1606H	1606MCJ
8	1608STD	1608DJ	1608ST	1608SC	1608H	1608MCJ
12	1612STD	1612DJ	1612ST	1612SC	1612H	1612MCJ

Clear Cover Catalog # Substitute (xx) for # of poles	White Cover Catalog # Substitute (xx) for # of poles
CC16xx	CW16xx

Heavy Duty Terminal Blocks - Marathon Special Products

1700 Series (Barrier Type) – 5/8" line-to-line spacing





Specifications



- 75 amps
- 600 volts AC/DC
- Base, plastic, 125°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 5/8" (.625") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .54"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant



Poles	Standard connector with serrations for anti-rotation	Short circuit bar with brass insert, 4 shorting pins per block
2	1702STD	1702SC
3	1703STD	1703SC
4	1704STD	1704SC
5	1705STD	1705SC
6	1706STD	1706SC
7	1707STD	1707SC



Poles	Standard connector with serrations for anti-rotation	Short circuit bar with brass insert, 4 shorting pins per block
8	1708STD	1708SC
9	1709STD	1709SC
10	1710STD	1710SC
11	1711STD	1711SC
12	1712STD	1712SC

Clear Cover
Catalog #
Substitute (xx)
for # of poles
CC17xx

Dead Front Terminal Blocks - Marathon Special Products

885 RZ Series



Specifications

- 85 amps
- 600 volts AC/DC
- Base, thermoplastic, 130°C (UL RTI)
- Available in 1 to 12 terminal positions
- UL and cUL recognized component
- .432" centerline spacing
- 16 in lbs force
- Numbered terminal positions
- Accommodates conductor sizes #4 - #18 AWG

985 GP Series



Specifications

- 85 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, steel, tin plated
- Connector, aluminum, tin plated
- Wire Range:
 - o (1) #4 - #18 AWG
 - o (1-2) #8 AWG
 - o (1-4) #10-12 AWG
 - o (1-6) #14-16 AWG
 - o (1-8) #18
- .625" centerline spacing

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

Poles	Catalog Number	
	885 RZ Series	985 GP Series
1	885RZ01	985GP01
2	885RZ02	985GP02
3	885RZ03	985GP03
4	885RZ04	985GP04
5	885RZ05	985GP05
6	885RZ06	985GP06
7	885RZ07	985GP07
8	885RZ08	985GP08
9	885RZ09	985GP09
10	885RZ10	985GP10
11	885RZ11	985GP11
12	885RZ12	985GP12

Double Row Terminal Blocks - Marathon Special Products

670A RZ Series



Specifications

- 20 amps
- 150V Class C, 300V Class B
- Base, thermoplastic 130°C
- Screws, steel, #6-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-30 poles at 3/8" centres
- Accepts lugs with max width of .31"
- Bare Wire Range #12- #22 AWG

671 RZ Series



Specifications

- 30 amps
- 150V Class C, 300V Class B
- Base, thermoplastic 125°C
- Screws, steel, #6-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-30 poles at 7/16" centres
- Accepts lugs with max width of .33"
- Bare Wire Range #14 - #22 AWG

672 RZ Series



Specifications

- 30 amps
- 600V Class B/C
- Base, thermoplastic 125°C
- Screws, steel, #8-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-24 poles at 9/16" centres
- Accepts lugs with max width of .41"
- Bare Wire Range #12 - #14 AWG

Poles	Catalog Number		
	670A RZ Series	671 RZ Series	672 RZ Series
1	670ARZ01	671RZ01	672RZ01
2	670ARZ02	671RZ02	672RZ02
3	670ARZ03	671RZ03	672RZ03
4	670ARZ04	671RZ04	672RZ04
5	670ARZ05	671RZ05	672RZ05
6	670ARZ06	671RZ06	672RZ06
7	670ARZ07	671RZ07	672RZ07
8	670ARZ08	671RZ08	672RZ08
9	670ARZ09	671RZ09	672RZ09
10	670ARZ10	671RZ10	672RZ10
11	670ARZ11	671RZ11	672RZ11
12	670ARZ12	671RZ12	672RZ12
13	670ARZ13	671RZ13	672RZ13
14	670ARZ14	671RZ14	672RZ14
15	670ARZ15	671RZ15	672RZ15
16	670ARZ16	671RZ16	672RZ16
17	670ARZ17	671RZ17	672RZ17
18	670ARZ18	671RZ18	672RZ18
19	670ARZ19	671RZ19	672RZ19
20	670ARZ20	671RZ20	672RZ20
21	670ARZ21	671RZ21	672RZ21
22	670ARZ22	671RZ22	672RZ22
23	670ARZ23	671RZ23	672RZ23
24	670ARZ24	671RZ24	672RZ24
25	670ARZ25	671RZ25	-
26	670ARZ26	671RZ26	-
27	670ARZ27	671RZ27	-
28	670ARZ28	671RZ28	-
29	670ARZ29	671RZ29	-
30	670ARZ30	671RZ30	-

Control Switches

REES Inc. A leader in the design of control switches for over 80 years

Push Buttons

Single Plunger

- A broad selection of contact arrangements
- Heavy Duty rated
- Variety of lockable devices
- Available styles:
 - o Momentary, Maintained and Latching
 - o Keylock
 - o Emergency Stop
 - o Weatherproof

Double Plunger

- A broad selection of contact arrangements
- Heavy Duty rated
- Variety of lockable devices

30.5mm Control Units

- 4 styles of push button operators
- 3 styles of 2,3 and 4 position selector operators
- 4 styles of push-pull units
- Illuminated push buttons
- Variety of lockable devices
- All meet NEMA12/13 requirements when properly installed in an appropriate enclosure
- Variety of different cams to customize any installation



Many Styles of Buttons and Contact Arrangements Available – Please Call

Pull to Stop

Cable Operated Switches

- Taut and slack cable styles for Emergency Stop applications as well as ordinary circuit control

Rope Operated Switches

- Spring loaded Rope Operated Sequence Switch alternates between NC and NC states with a pull of the rope



Many Single and Double Arm Cable/Rope Switches Available – Please Call

Retractable Cords

TPR POWER CORDS

Catalog Number	Retracted Length	Number of Conductors	Type	Maximum Voltage	Temperature (°C)	Cable OD (inches)
18 AWG						
72180	12, 24, 36, 48	2	SVEO/SVTO	300	105°	.242
72181	12, 24, 36, 48	2	SJEOW/SJT	300	105°	.300
73181	12, 24, 36, 48	3	SJEOW/SJT	300	105°	.308
74181	12, 24, 36, 48	4	SJEOW/SJT	300	105°	.340
75181	12, 24, 36, 48	5	SJEOW/SJT	300	105°	.385
77182	12, 24, 36, 48	7	SEOW/STO	600	105°	.500
710182	12, 24, 36, 48	10	SEOW/STO	600	105°	.590
16 AWG						
73161	12, 24, 36, 48	3	SJEOW/SJT	300	105°	.340
74161	12, 24, 36, 48	4	SJEOW/SJT	300	105°	.365
74162	12, 24, 36, 48	4	SEOW/STO	600	105°	.425
76162	12, 24, 36, 48	6	SEOW/STO	600	105°	.530
78162	12, 24, 36, 48	8	SEOW/STO	600	105°	.570
14 AWG						
73142	12, 24, 36, 48	3	SEOW/STO	600	105°	.540
74142	12, 24, 36, 48	4	SEOW/STO	600	105°	.570
12 AWG						
73122	12, 24, 36, 48	3	SEOW/STO	600	105°	.580
74122	12, 24, 36, 48	4	SEOW/STO	600	105°	.660

Soft, Bare Copper, TPR Insulated

TPR, Black Jacket

PVC POWER CORDS

Catalog Number	Retracted Length	Number of Conductors	Type	Maximum Voltage	Temperature (°C)	Cable OD (inches)
18 AWG						
92180	12, 24, 36, 48	2	SVT	300	105°	.250
93180	12, 24, 36, 48	3	SVT	300	105°	.260
92181	12, 24, 26, 48	2	SJT	300	105°	.295
93181	12, 24, 36, 48	3	SJT	300	105°	.330
94181	12, 24, 36, 48	4	SJT	300	105°	.360
95181	12, 24, 36, 48	5	SJT	300	105°	.440
16 AWG						
92161	12, 24, 36, 48	2	SJT	300	105°	.315
93161	12, 24, 36, 48	3	SJT	300	105°	.355
94161	12, 24, 36, 48	4	SJT	300	105°	.410
14 AWG						
93141	12, 24, 36, 48	3	SJT	300	105°	.390
12 AWG						
93121	12, 24, 36, 48	3	SJT	300	105°	.435

Soft, Bare Copper, PVC Insulated

PVC, Black Jacket (available in white)

LENGTH CHART (1:5 Extension Ratio)

Retracted Length	Extended Length	Tangent Length Both Ends
12 inches	5 feet	12 inches
24 inches	10 feet	6 inches
36 inches	15 feet	6 inches
48 inches	20 feet	6 inches



Many Other Cords Available. Please Call.

Foot Switches – Linemaster

Clipper (Cast Iron)

20A @ 125-250 VAC / 1 H.P. @125-250 VAC

	Type	Function	
632S	Single Pedal	Momentary	SPDT
TWIN632S	Double Pedal	Momentary	SPDT
642S	Single Pedal - Wide Treadle	Momentary	SPDT
632DA	Single Pedal	Maintained	SPDT



Clipper

15A @ 125 VAC / 3/4 H.P. @ 125VAC

	Type	Function	
635S	Single Pedal	Momentary	DPDT
TWIN635S	Double Pedal	Momentary	DPDT
632SC3*	Single Pedal	Momentary	SPST
632DC3A*	Single Pedal	Maintained	SPST

*Supplied with 8 ft. 14/3 Cord and 3 prong series plug. Wired N.O.



Clipper TWIN

Treadlite II (Steel)

15A @ 125-250 VAC / 1/2 H.P. @ 125-250 VAC

	Type	Function	
T91S	Single Pedal	Momentary	SPDT
T91SC36*	Single Pedal	Momentary	SPDT

*Supplied with 6 ft. 18/3 Cord without Plug, Wired N.O.



Treadlite II

Optional Steel Guards for Above Switches

	Type
522B14	Single Guard - Standard
522F28	Single Guard - Oversized
522B12	Double Guard - Standard
522D28	Double Guard - Oversized



Guard

Classic IV (Aluminum)

16A @ 125-250VAC / 1/2 H.P. @125-250 VAC

	Type	Function	
88SH1-05	Single Pedal - Guarded	Momentary	SPDT
88SH2-05	Single Pedal - Guarded	Momentary	DPDT
88SN1-05	Single Pedal - No Guard	Momentary	SPDT
88SN2-02	Single Pedal - No Guard	Momentary	DPDT
TWIN88SH1-05	Double Pedal - Guarded	Momentary	Each Side SPDT
TWIN88SH2-05	Double Pedal - Guarded	Momentary	Each Side DPDT
TWIN88SN1-05	Double Pedal - No Guard	Momentary	Each Side SPDT
TWIN88SN2-02	Double Pedal - No Guard	Momentary	Each Side DPDT



Single - No Guard

Foot Switches – Linemaster

Hercules (Cast Iron)

20A @ 125-250 VAC / 1 H.P. @ 125-250VAC

	Type	Function	
531SWH	Full Shield	Momentary	SPDT
531SWHO	Oversized Shield	Momentary	SPDT
531SWHOX	Extra Oversized Shield	Momentary	SPDT
531SWN	No Shield	Momentary	SPDT
532SWH	Full Shield	Momentary	DPDT
532SWHO	Oversized Shield	Momentary	DPDT
532SWHOX	Extra Oversized Shield	Momentary	DPDT
532SWN	No Shield	Momentary	DPDT



Hercules - Full Shield

571DWH	Full Shield	Maintained	SPDT
571DWHO	Oversized Shield	Maintained	SPDT
571DWHOX	Extra Oversized Shield	Maintained	SPDT
571DWN	No Shield	Maintained	SPDT
572DWH	Full Shield	Maintained	DPDT
572DWHO	Oversized Shield	Maintained	DPDT
572DWHOX	Extra Oversized Shield	Maintained	DPDT
572DWN	No Shield	Maintained	DPDT



Hercules - No Shield

Hercules - Anti Trip (Cast Iron)

20A @ 125-250VAC / 1 H.P. @ 125-250VAC

	Type	Function	
511B	Full Shield	Momentary	SPDT
511BO	Oversized Shield	Momentary	SPDT
511BOX	Extra Oversized Shield	Momentary	SPDT
511BG	Full Shield with Gate	Momentary	SPDT



Hercules Potentiometer (Cast Iron)

	Type	Function
500H	Full Shield	Momentary
500AH	Full Shield with Auxiliary Contact	Momentary
500N	No Shield	Momentary
500AN	No Shield with Auxiliary Contact	Momentary

Full Shield

Maximum Resistance Must Be Specified When Ordering

Many Other Foot Switches Available – Please Call

Standoff Insulators

	Size	Std. Pkg.
559600	1" High - 1/4" 20 Thread (Black)	1
559620	1-1/4" High - 1/4" x 20 Thread (Black)	1
2015-3A	1-1/2" High - 3/8" x 16 Thread (Red)	1
2015-3B	1-3/4" High - 3/8" x 16 Thread (Red)	1
2015-3C	2" High - 3/8" x 16 Thread (Red)	1
2015-4C	2" High - 1/2" x 13 Thread (Red)	1



Tape

8.5 mil Premium Vinyl Tape - Professional Grade

Std. Pkg.

5243	Black	3/4" x 66'	100
4247	Black	1" x 66'	80
4252	Black	1-1/2" x 66'	100
4311	Black	2" x 66'	40

7 mil Vinyl Tape - Economy Grade

Std. Pkg.

5126	Black	3/4" x 60'	100
5898	Green	3/4" x 66'	10
5899	Yellow	3/4" x 66'	10
5900	Red	3/4" x 66'	10
5901	Blue	3/4" x 66'	10
5902	White	3/4" x 66'	10
5903	Brown	3/4" x 66'	10
5904	Orange	3/4" x 66'	10
5905	Grey	3/4" x 66'	10
5906	Violet	3/4" x 66'	10

Friction Tape

Std. Pkg.

1002	3/4" x 60'	100
------	------------	-----

Rubber Tape

Std. Pkg.

9002	3/4" x 22'	100
------	------------	-----

Linerless High Voltage Insulating Tape

Std. Pkg.

2211	3/4" x 30'	100
2212	1" x 30'	80
2213	1-1/2" x 30'	50
2214	2" x 30'	10

High Voltage Tape with Liner

Std. Pkg

2117	3/4" x 30'	100
2132	1" x 30'	80
2134	1-1/2" x 30'	50
2145	2" x 30'	10

Tinned Copper Shielding Tape

Std. Pkg.

5415	1" x 15'	50
5416	1" x 100'	16

Tinned Copper Shielding Braid

Std. Pkg.

2711	3/8" x 100'	1
------	-------------	---

Pressure Sensitive Glass Cloth Tape

	Size	Std. Pkg.
3451	1/2" x 66'	50
3456	3/4" x 66'	10
3459	1" x 108'	20



Tape

Silicone Rubber Tape

	Size	Std. Pkg.
3455	1" x 30'	50

Varnished Dacron Glass Cloth Tape

	Size	Std. Pkg.
1121	3/4" x 60'	40

Shielding Tape

	Size	Std. Pkg.
2104	3/4" x 15'	50

Arc and Fireproofing Tape

	Size	Std. Pkg.
3819	3" x 20'	20

Electrical Filler Tape

	Size	Std. Pkg.
2074	1-1/2" x 60'	10

Underground Marking Tape

"CAUTION BURIED ELECTRIC LINE BELOW"

	Type	Size	Std. Pkg.
UMT1006RE	Non-detectable	6" x 1000' 4 mil	1



Stop and Go Lights

Outdoor


	Type	Voltage	Std. Pkg.
SG10-115RG	Incandescent	115VAC	1
SG10-115RG-LED	LED	115VAC	1
SG10-12RG	Incandescent	12VDC	1
SG10-12RG-LED	LED	12VDC	1
SG10-24RG	Incandescent	24VDC	1
SG10-24RG-LED	LED	24VDC	1

Indoor (Includes Built in Flasher & Switch)

	Type	Voltage	Std. Pkg.
SG20-115RG	Incandescent	115VAC	1
SG20-115RG-LED	LED	115VAC	1
SG20-12RG	Incandescent	12VDC	1
SG20-12RG-LED	LED	12VDC	1
SG20-24RG	Incandescent	24VDC	1
SG20-24RG-LED	LED	24VDC	1

Outdoor / Indoor Kit

	Type	Voltage	Std. Pkg.
SG30-115RG	Incandescent	115VAC	1
SG30-115RG-LED	LED	115VAC	1
SG30-12RG	Incandescent	12VDC	1
SG30-12RG-LED	LED	12VDC	1
SG30-24RG	Incandescent	24VDC	1
SG30-24RG-LED	LED	24VDC	1

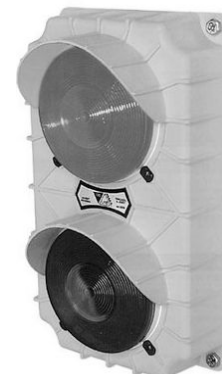

Radiant Heaters

	Std. Pkg.
CL2	1
COZY Legs Flat Panel Heater - 200 Watts	

ETL - Certified Zero-Clearance Item
(Cozy Legs may be placed directly against surfaces without risk of fire)
Includes Portable Stand and Hi-Low Switch



	Std. Pkg.
TT	1
TOASTY Toes Adjustable Foot Rest - 105 Watts	

LED Indicator Displays ON/OFF
Ergonomic Support for Better Circulation & Support
3 Positions



	Std. Pkg.
CT	1
COZY Carpeted Foot Warmer - 90 Watts	

LED Indicator Displays ON/OFF



	Std. Pkg.
FW	1
Heated Floor Mat - Regular (22.95" x 13.97") - 120 Watts	
FWB	1
Heated Floor Mat - Large (36.25" x 16") - 135 Watts	

Made of Heavy Duty, Waterproof Rubber
Heating Element is Molded within the Rubber - Eliminating Danger of Fire or Electrical Shock



Dock Loading Lights

Single Arm	Type	Std. Pkg.
SDL40P	40" - Incandescent	1
SDL40PLED	40" - with LED Bulb	1
SDL40HDLED	40" - Heavy Duty LED	1
SDL60P	60" - Incandescent	1
SDL60PLED	60" - with LED Bulb	1
SDL60HDLED	60" - Heavy Duty LED	1



Double Arm	Type	Std. Pkg.
DL24P	24" - Incandescent	1
DL24PLED	24" - with LED Bulb	1
DL24HDLED	24" - Heavy Duty LED	1
DL40P	40" - Incandescent	1
DL40PLED	40" - with LED Bulb	1
DL40HDLED	40" - Heavy Duty LED	1
DL60P	60" - Incandescent	1
DL60PLED	60" - with LED Bulb	1
DL60HDLED	60" - Heavy Duty LED	1



	Type	Std. Pkg.
HDLED-HEAD	Heavy Duty LED Head Only	1
DLFAN	3 Speed Dock Light Fan	1




Heavy Duty Head

Heat Shrink Products

Breakout Boots

	Body Range (Inches)	Leg Range (Inches)	No. of Legs
ACBR2-1A	.035 - 1.00	0.15 - 0.53	2
ACBR2-2A	1.25 - 1.70	0.30 - 0.75	2
ACBR2-3A	1.65 - 3.00	0.65 - 1.40	2
ACBR3-1A	0.50 - 1.35	0.20 - 0.55	3
ACBR3-2A	0.85 - 2.20	0.35 - 0.90	3
ACBR3-3A	1.10 - 2.90	0.50 - 1.25	3
ACBR3-4A	2.35 - 5.65	1.20 - 2.10	3
ACBR4-1A	0.70 - 1.25	0.15 - 0.45	4
ACBR4-2A	1.00 - 2.10	0.35 - 0.90	4
ACBR4-3A	1.20 - 3.50	0.55 - 1.40	4
ACBR4-4A	2.35 - 6.05	0.90 - 1.50	4




48" Long Heavy Wall Heat Shrink with Adhesive

	Range (Inches)
AWCSM12/3-1200S	0.14 - 0.39
AWCSM16/4-1200S	0.18 - 0.55
AWCSM24/6-1200S	0.26 - 0.87
AWCSM34/8-1200S	0.35 - 1.22
AWCSM48/12-1200S	0.51 - 1.73
AWCSM56/16-1200S	0.69 - 1.97
AWCSM70/20-1200S	0.87 - 2.48
AWCSM110/30-1200S	1.30 - 3.94
AWCSM130/35-1200S	1.49 - 4.65




End Caps

	Range (Inches)
AESC1A	0.15 - 0.30
AESC2A	0.30 - 0.70
AESC3A	0.65 - 1.25
AESC4A	1.05 - 1.95
AESC5A	1.30 - 2.65
AESC6A	1.85 - 3.70
AESC7A	2.95 - 4.50



Teck Cable Splice Kits - Aluminum/Copper

	KV / and Number of Conductors	Wire Range (inches)
TS14-4-4	1KV / 3 or 4 Cond.	#14 - #4
TS2-3/0-4	1KV / 3 or 4 Cond.	#2 - 3/0
TS4/0-400-4	1KV / 3 or 4 Cond.	4/0 - 400 Mcm
TS500-1000-4	1KV / 3 or 4 Cond.	500 - 1000 Mcm
TS5-3/0-400-3	5KV / 3 Cond.	3/0 - 400 Mcm
TS5-3-2/0-3	5KV / 3 Cond.	#3 - 2/0
TS5-500-1000-3	5KV / 3 Cond.	500 - 1000 Mcm





Heat Shrink Products

Wraparound Cable Support Sleeves - 10" Length

	Wire Range (Inches)
WCSS170/35	0.35 - 1.70
WCSS280/60	0.60 - 2.80
WCSS360/100	1.00 - 3.60
WCSS470/110	1.10 - 4.70

Busbar Insulating Tubing

Heavy Wall - 5-35KV	Range (mm)	Bus Bar Dimensions
ABBIT40/16AU	40 - 16	1" - 1-1/2"
ABBIT75/30AU	75 - 30	2"
ABBIT100/40AU	100 - 40	3"
ABBIT150/60AU	150 - 60	4"
ABBIT180/72AU	180 - 72	6"
Medium Wall - 5-25KV	Range (mm)	Bus Bar Dimensions
ABPTM30/12AU	30 - 12	1" - 1-1/2"
ABPTM50/20AU	50 - 20	2"
ABPTM75/30AU	75 - 30	3"
ABPTM100/40AU	100 - 40	4"
ABPTM180/72AU	180 - 75	6"



Wire Mesh Grips

Dust-Tite Strain Relief Grips

	Cable Range (inches)	Hub Size	Std. Pkg.
DTG0501	0.22 - 0.32	1/2"	1
DTG0502	0.30 - 0.43	1/2"	1
DTG0503	0.40 - 0.54	1/2"	1
DTG0751	0.52 - 0.73	3/4"	1
DTG1001	0.70 - 0.97	1"	1
DTG1251	0.94 - 1.25	1-1/4"	1
DTG1501	1.20 - 1.50	1-1/2"	1
DTG2001	1.40 - 1.75	2"	1
DTG2501	1.62 - 2.00	2-1/2"	1
DTG2502	2.00 - 2.45	2-1/2"	1



Support Grips - Single Eye - Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050U	0.50 - 0.62	790	1
SPSR062U	0.63 - 0.74	790	1
SPSR075U	0.75 - 0.99	1020	1
SPSR100U	1.00 - 1.24	1610	1
SPSR125U	1.25 - 1.49	1610	1
SPSR150U	1.50 - 1.74	1610	1
SPSR175U	1.75 - 1.99	2150	1
SPSR200U	2.00 - 2.49	2360	1
SPSR250U	2.50 - 2.99	3260	1
SPSR300U	3.00 - 3.49	5750	1
SPSR350U	3.50 - 3.99	5750	1



Wire Mesh Grips

Stainless Steel Support Grips - Single Eye, Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050US	0.50 - 0.62	1050	1
SPSR062US	0.63 - 0.74	2050	1
SPSR075US	0.75 - 0.99	2050	1
SPSR100US	1.00 - 1.24	2650	1
SPSR125US	1.25 - 1.49	4500	1
SPSR150US	1.50 - 1.74	4500	1
SPSR175US	1.75 - 1.99	6000	1
SPSR200US	2.00 - 2.49	8950	1
SPSR250US	2.50 - 2.99	7750	1
SPSR300US	3.00 - 3.49	8500	1



Stainless Steel

Pulling Grips - Heavy Duty, Rotating Eye

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
PHS050	0.50 - 0.61	5600	1
PHS062	0.62 - 0.74	6800	1
PHS075	0.75 - 0.99	9600	1
PHS100	1.00 - 1.49	16400	1
PHS150	1.50 - 1.99	16400	1
PHS200	2.00 - 2.49	27200	1
PHS250	2.50 - 2.99	33000	1
PHS300	3.00 - 3.49	41000	1
PHS350	3.50 - 3.99	48000	1



Toggle Switches

3/4 H.P. - 10A @ 250 VAC, 20A @ 125VAC

Screw	.250 Quick Connect	Solder	Function	
1185/20	1185Q/20	1185S/20	ON - OFF	SPST
1196/20	1196Q/20	1196S/20	(ON) - OFF	SPST
1186/20	1186Q/20	1186S/20	ON - OFF	SPDT
1241/20	1241Q/20	1241S/20	(ON) - (ON)	SPDT
1185/20	1185Q/20	1185S/20	ON - OFF - ON	SPDT
1195/20	1195Q/20	1195S/20	(ON) - OFF - (ON)	SPDT

1-1/2 H.P. - 10A @ 250 VAC, 20A @ 125VAC

Screw	.250 Quick Connect	Solder	Function	
1188/20	1188Q/20	1188S/20	ON - OFF	DPST
1194/20	1194Q/20	1194S/20	ON - ON	DPDT
1242/20	1242Q/20	1242S/20	(ON) - (ON)	DPDT
1189/20	1189Q/20	1189S/20	ON - OFF - ON	DPDT
1244/20	1244Q/20		(ON) - OFF - ON	DPDT
1193/20	1193Q/20		(ON) - OFF - (ON)	DPDT

() Momentary Contacts



Many Other Switches Available – Please Call

Termination Lugs

Copper Compression Lug - 1 Hole Short Barrel

	Wire Size	Hole Size	Std. Pkg.
SAL6CT14	6 Str.	1/4"	1
SAL4CT14		1/4"	1
SAL4CT516	4 Str.	5/16"	1
SAL4CT38		3/8"	1
SAL2CT14		1/4"	1
SAL2CT516	2 Str.	5/16"	1
SAL2CT38		3/8"	1
SAL1CT14		1/4"	1
SAL1CT516	1 Str.	5/16"	1
SAL1CT38		3/8"	1
SAL25T516	1/0 Str.	5/16"	1
SAL25T38		3/8"	1
SAL26T38	2/0 Str.	3/8"	1
SAL26T12		1/2"	1
SAL27T38	3/0 Str.	3/8"	1
SAL27T12		1/2"	1
SAL28T38	4/0 Str.	3/8"	1
SAL28T12		1/2"	1
SAL29T12	250 Mcm	1/2"	1
SAL30T12	300 Mcm	1/2"	1
SAL31T12	350 Mcm	1/2"	1
SAL32T58	400 Mcm	5/8"	1
SAL34T58	500 Mcm	5/8"	1
SAL36T58	600 Mcm	5/8"	1
SAL39T58	750 Mcm	5/8"	1
SAL44T58	1000 Mcm	5/8"	1



Copper Compression Lug - 1 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA6C	6 Str.	1/4"	1
SA4C	4 Str.	1/4"	1
SA2C	2 Str.	5/16"	1
SA1C	1 Str.	5/16"	1
SA25	1/0 Str.	5/16"	1
SA26	2/0 Str.	3/8"	1
SA27	3/0 Str.	1/2"	1
SA28	4/0 Str.	1/2"	1
SA29	250 Mcm	1/2"	1
SA30	300 Mcm	1/2"	1
SA31	350 Mcm	1/2"	1
SA32	400 Mcm	1/2"	1
SA34	500 Mcm	1/2"	1
SA36	600 Mcm	1/2"	1
SA39	750 Mcm	1/2"	1
SA44	1000 Mcm	1/2"	1



Termination Lugs / Sleeves

Copper Compression Lug - 2 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA2C-2N	2 Str.	1/2"	1
SA1C-2N	1 Str.	1/2"	1
SA25-2N	1/0 Str.	1/2"	1
SA26-2N	2/0 Str.	1/2"	1
SA27-2N	3/0 Str.	1/2"	1
SA28-2N	4/0 Str.	1/2"	1
SA29-2N	250 Mcm	1/2"	1
SA30-2N	300 Mcm	1/2"	1
SA31-2N	350 Mcm	1/2"	1
SA32-2N	400 Mcm	1/2"	1
SA34-2N	500 Mcm	1/2"	1
SA36-2N	600 Mcm	1/2"	1
SA39-2N	750 Mcm	1/2"	1
SA44-2N	1000 Mcm	1/2"	1
SA45-2N	1250 Mcm	1/2"	1
SA46-2N	1500 Mcm	1/2"	1



Copper Compression Sleeves

Long Barrel	Short Barrel	Wire Size	Std. Pkg.
SS6C	SSL6C	6 Str.	1
SS4C	SSL4C	4 Str.	1
SS2C	SSL2C	2 Str.	1
SS1C	SSL1C	1 Str.	1
SS25	SSL25	1/0 Str.	1
SS26	SSL26	2/0 Str.	1
SS27	SSL27	3/0 Str.	1
SS28	SSL28	4/0 Str.	1
SS29	SSL29	250 Mcm	1
SS30	SSL30	300 Mcm	1
SS31	SSL31	350 Mcm	1
SS32	SSL32	400 Mcm	1
SS34	SSL34	500 Mcm	1
SS36	SSL36	600 Mcm	1
SS39	SSL39	750 Mcm	1
SS44	SSL44	1000 Mcm	1



Aluminum Compression Lug - 1 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA26A1	2/0 Str.	1/2"	1
SA27A3	3/0 Str.	1/2"	1
SA28A3	4/0 Str.	1/2"	1
SA29A1	250 Mcm	1/2"	1
SA30A3	300 Mcm	1/2"	1
SA31A1	350 Mcm	1/2"	1
SA32A1	400 Mcm	5/8"	1
SA34A1	500 Mcm	5/8"	1
SA36A1	600 Mcm	5/8"	1
SA39A3	750 Mcm	5/8"	1
SA44A1	1000 Mcm	5/8"	1



Termination Lugs / Sleeves / Pin Adapters

Aluminum Compression Lug - 2 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA26A3	2/0 Str.	1/2"	1
SA27A5	3/0 Str.	1/2"	1
SA28A5	4/0 Str.	1/2"	1
SA29A3	250 Mcm	1/2"	1
SA30A3	300 Mcm	1/2"	1
SA31A3	350 Mcm	1/2"	1
SA32A3	400 Mcm	1/2"	1
SA34A3	500 Mcm	1/2"	1
SA36A3	600 Mcm	1/2"	1
SA39A5	750 Mcm	1/2"	1
SA44A3	1000 Mcm	1/2"	1



Aluminum Compression Sleeves

	Wire Size	Std. Pkg.
SS26A1	2/0 Str.	1
SS27A1	3/0 Str.	1
SS28A1	4/0 Str.	1
SS29A1	250 Mcm	1
SS30A1	300 Mcm	1
SS31A1	350 Mcm	1
SS32A1	400 Mcm	1
SS34A1	500 Mcm	1
SS36A1	600 Mcm	1
SS39A1	750 Mcm	1
SS44A1	1000 Mcm	1



Compression Pin Adapters

Straight Pin	Offset Pin	Wire Size	Std. Pkg.
SYP6		6 Str.	1
SYP4		4 Str.	1
SYP2		2 Str.	1
SYP1		1 Str.	1
SYP1/0	SYPO1/0	1/0 Str.	1
	SYPO2/0	2/0 Str.	1
	SYPO3/0	3/0 Str.	1
	SYPO4/0	4/0 Str.	1
SYP250	SYPO250	250 Mcm	1
	SYPO300	300 Mcm	1
SYP350	SYPO350	350 Mcm	1
	SYPO400	400 Mcm	1
SYP500	SYPO500	500 Mcm	1
	SYPO600	600 Mcm	1
SYP750	SYPO750	750 Mcm	1



To terminate both Copper & Aluminum Conductors for use with Mechanical Connectors

Mechanical Lugs

One Cable	Wire Range	Mounting Holes	Std. Pkg.
SA6S	#6 - #14 Awg	1	1
SA2	#2 - #14 Awg	1	1
SA0	1/0 - #14 Awg	1	1
SA2/0	2/0 - #14 Awg	1	1
SA250	250 Mcm - #6 Awg	1	1
SA300	300 Mcm - #6 Awg	1	1
SA350	350 Mcm - #6 Awg	1	1
SA500	500 Mcm - #4 Awg	1	1
SA600	600 Mcm - #2 Awg	1	1
SA800	800 - 300 Mcm	1	1
SA1000	1000 - 500 Mcm	1	1
SA350-2NS	350 Mcm - #6 Awg	2	1
SA600-2NS	600 Mcm - #2 Awg	2	1
SA800-2N	800 - 300 Mcm	2	1
SA1000-2N	1000 - 500 Mcm	2	1

Two Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
SU0	1/0 - #14 Awg	1	1
SU2/0	2/0 - #14 Awg	1	1
SU250	250 Mcm - #6 Awg	1	1
SU350	350 Mcm - #6 Awg	1	1
SU600	600 Mcm - #2 Awg	1	1
SU800	800 - 300 Mcm	1	1
SU1000	1000 - 500 Mcm	1	1
SU350-2N	350 Mcm - #6 Awg	2	1
SU600-2NS	600 Mcm - #2 Awg	2	1
SU800-2NS	800 - 300 Mcm	2	1
SU1000-2NS	1000 - 500 Mcm	2	1

Three Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
S3A4-250N	250 Mcm - #6 Awg	2 or 4	1
S3A4-350N	350 Mcm - #6 Awg	2 or 4	1
S3A4-600N	600 Mcm - #2 Awg	2 or 4	1
S3A4-800N	800 - 300 Mcm	2 or 4	1
S3A4-1000N	1000 - 500 Mcm	2 or 4	1

Four Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
S4A4-600N	600 Mcm - # 6 Awg	4	1
S4A4-1000N	1000 - 500 Mcm	4	1

Step Lugs Two, Three and Four Cables	Wire Range	Mounting Holes	Std. Pkg.
SB2-300	300 Mcm - #6 Awg	1	1
SB2-600	600 Mcm - #2 Awg	2	1
SB2-800	800 - 300 Mcm	2	1
SB3-600	600 Mcm - #2 Awg	2	1
SB4-600	600 Mcm - #2 Awg	2	1
SB4-800	800 - 300 Mcm	2	1



Thread Adapters

PG to NPT	Male	Female	Std. Pkg.
1234/0912	PG9	1/2" NPT	1
1234/1112	PG11	1/2" NPT	1
1234/1138	PG11	3/8" NPT	1
1234/1312	PG13	1/2" NPT	1
1234/1612	PG16	1/2" NPT	1
1234/2112	PG21	1/2" NPT	1
1234/2134	PG21	3/4" NPT	1
1234/2910	PG29	1" NPT	1
1234/36125	PG36	1-1/4" NPT	1
1234/36150	PG36	1-1/2" NPT	1
1234/42150	PG42	1-1/2" NPT	1
Metric to NPT	Male	Female	Std. Pkg.
1234M1612	M16	1/2" NPT	1
1234M2012	M20	1/2" NPT	1
1234M2512	M25	1/2" NPT	1
1234M2534	M25	3/4" NPT	1
1234M3210	M32	1" NPT	1
1234M3234	M32	3/4" NPT	1

Available in Explosion Proof and Stainless Steel



Grounding

Water Pipe Clamp - Zinc Die Cast with Steel Screws

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10BG	1/2" - 1"	8 Sol.	2 Str.	25



Water Pipe Clamp - Bronze with Bronze Screws for Direct Burial

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10BR	1/2" - 1"	10 Sol.	2 Str.	25



Water Pipe Clamps - Bronze with Steel Screws

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10B	1/2" - 1"	10 Sol.	2 Str.	25
34B	1-1/4" - 2"	10 Sol.	2 Str.	1
35A	2-1/2" - 4"	10 Sol.	2 Str.	1
36A	4" - 6"	10 Sol.	2 Str.	1



Lay-In Grounding Lugs - Aluminum

	Ground Wire Size	Std. Pkg.
AL4	#4 - #14	100
AL1/0	1/0 - #8	100
AL3/0	3/0 - #6	50
AL250	250 Mcm - #6	50

Available in Copper



EMT

EMT Conduit Elbows

90 Degree	45 Degree	Size	Std. Pkg.
SWEEP050EMT	SWEEP050-45EMT	1/2"	50
SWEEP075EMT	SWEEP075-45EMT	3/4"	50
SWEEP100EMT	SWEEP100-45EMT	1"	25
SWEEP125EMT	SWEEP125-45EMT	1-1/4"	20
SWEEP150EMT	SWEEP150-45EMT	1-1/2"	15
SWEEP200EMT	SWEEP200-45EMT	2"	10
SWEEP250EMT	SWEEP250-45EMT	2-1/2"	1
SWEEP300EMT	SWEEP300-45EMT	3"	1
SWEEP350EMT	SWEEP350-45EMT	3-1/2"	1
SWEEP400EMT	SWEEP400-45EMT	4"	1

Available in 15, 22-1/2 and 30 Degree



EMT Pipe Straps

1 Hole	Size	Std. Pkg.
142S	1/2"	100
143S	3/4"	100
144S	1"	50
145S	1-1/4"	50
146S	1-1/2"	50
147S	2"	50
138S	2-1/2"	25
139S	3"	25
141S	3-1/2"	10
148S	4"	10
2 Hole	Size	Std. Pkg.
2142S	1/2"	250
2143S	3/4"	200
2144S	1"	100
2145S	1-1/4"	50
2146S	1-1/2"	50
2147S	2"	25
2138S	2-1/2"	25
2139S	3"	20
2141S	3-1/2"	10
2148S	4"	10



EMT Set Screw Conduit Bodies c/w Cover & Gasket

C	LB	Size	Std. Pkg.
C7ATCG	LB7ATCG	2-1/2"	1
C8ATCG	LB8ATCG	3"	1
C10ATCG	LB10ATCG	4"	1
LL	LR	Size	Std. Pkg.
LL7ATCG	LR7ATCG	2-1/2"	1
LL8ATCG	LR8ATCG	3"	1
LL10ATCG	LR10ATCG	4"	1



EMT

Combination EMT/Rigid Conduit Bodies c/w Cover & Gasket

C	LB	Size	Std. Pkg.
C1CA	LB1CA	1/2"	10
C2CA	LB2CA	3/4"	10
C3CA	LB3CA	1"	5
C4CA	LB4CA	1-1/4"	1
C5CA	LB5CA	1-1/2"	1
C6CA	LB6CA	2"	1



LL	LR	Size	Std. Pkg.
LL1CA	LR1CA	1/2"	10
LL2CA	LR2CA	3/4"	10
LL3CA	LR3CA	1"	5
LL4CA	LR4CA	1-1/4"	1
LL5CA	LR5CA	1-1/2"	1
LL6CA	LR6CA	2"	1



T	Size	Std. Pkg.
T1CA	1/2"	10
T2CA	3/4"	10
T3CA	1"	5
T4CA	1-1/4"	1
T5CA	1-1/2"	1
T6CA	2"	1




EMT Pull Elbows - Die Cast

Female to Female	Male to Female	Size	Std. Pkg.
1326	1332	1/2"	10
1327	1333	3/4"	5
1328		1"	1
1329		1-1/4"	1



EMT Offset Set Screw Connector - Die Cast

	Size	Std. Pkg.
1250	1/2"	10
1251	3/4"	10



EMT to Flexible Metal Conduit Connector - Die Cast

	Size	Std. Pkg.
170C	1/2" EMT - 3/8" Flex	50
171C	1/2" EMT - 1/2" Flex	25
172C	3/4" EMT - 3/4" Flex	20
173C	1" EMT - 1" Flex	10



EMT Compression to Rigid Coupling

	Size	Std. Pkg.
ERC22	1/2"	25
ERC23	3/4"	25
ERC24	1"	25



EMT

EMT Set Screw Connectors & Couplings – Steel

Connectors	Insulated Connectors	Size	Std. Pkg.
S1110	S4066	1/2"	50
S1111	S4067	3/4"	25
S1112	S4068	1"	50
S1112A	S4069	1-1/4"	25
S1112B	S4070	1-1/2"	10
S1112C	S4071	2"	5
S1112D	S4072	2-1/2"	1
S1112E	S4073	3"	1
S1112F	S4075	4"	1
Coupling		Size	Std. Pkg.
S1113		1/2"	50
S1114		3/4"	25
S1115		1"	50
S1115A		1-1/4"	25
S1115B		1-1/2"	10
S1115C		2"	5
S1115D		2-1/2"	1
S1115E		3"	1
S1115F		4"	1



“Blue Cap” EMT Raintight Connectors & Couplings - Steel

Connectors	Insulated Connectors	Size	Std. Pkg.
S1010RT	S4060RT	1/2"	50
S1011RT	S4061RT	3/4"	25
S1012RT	S4062RT	1"	50
S1013RT	S4063RT	1-1/4"	25
S1014RT	S4064RT	1-1/2"	10
S1015RT	S4065RT	2"	5
S1015DRT	S4065DRT	2-1/2"	1
S1015ERT	S4065ERT	3"	1
S1015FRT	S4065FRT	4"	1
Couplings		Size	Std. Pkg.
S1016RT		1/2"	50
S1017RT		3/4"	25
S1018RT		1"	50
S1019RT		1-1/4"	25
S1020RT		1-1/2"	10
S1021RT		2"	5
S1021DRT		2-1/2"	1
S1021ERT		3"	1
S1021FRT		4"	1



Rigid

Strain Relief Connectors - Steel

	Colour Code	Range	Std. Pkg.
1/2"			
CG50-250	Red	0.15 - 0.25	25
CG50-350	White	0.25 - 0.35	25
CG50-450	Blue	0.35 - 0.45	25
CG50-560	Green	0.45 - 0.56	25
CG50-650	Brown	0.56 - 0.65	25
3/4"			
CG75-250	Red	0.15 - 0.25	10
CG75-350	White	0.25 - 0.35	10
CG75-450	Blue	0.35 - 0.45	10
CG75-560	Green	0.45 - 0.56	10
CG75-650	Brown	0.56 - 0.65	10
CG75-750	Yellow	0.65 - 0.75	10
CG75-850	Purple	0.75 - 0.85	10
1"			
CG100-560	Green	0.45 - 0.56	5
CG100-650	Brown	0.56 - 0.65	5
CG100-750	Yellow	0.65 - 0.75	5
CG100-850	Purple	0.75 - 0.85	5
CG100-950	Grey	0.85 - 0.95	5
CG100-1050	Black	0.95 - 1.05	5
1-1/4"			
CG125-850	Purple	0.75 - 0.85	5
CG125-950	Grey	0.85 - 0.95	5
CG125-1050	Black	0.95 - 1.05	5
CG125-1150	Orange	1.05 - 1.15	5
CG125-1250	Red	1.15 - 1.25	5
CG125-1375	White	1.25 - 1.375	5
1-1/2"			
CG150-1050	Black	0.95 - 1.05	2
CG150-1150	Orange	1.05 - 1.15	2
CG150-1250	Red	1.15 - 1.25	2
CG150-1375	White	1.25 - 1.375	2



Larger sizes as well as 45° and 90° connectors available - Please Call
Stainless Steel Strain Relief Connectors Available - See Page 68

Sealing O-Rings

	Size	Std. Pkg.
SR50	1/2"	100
SR75	3/4"	100
SR100	1"	100
SR125	1-1/4"	50
SR150	1-1/2"	50
SR200	2"	50
SR250	2-1/2"	1
SR300	3"	1
SR350	3-1/2"	1
SR400	4"	1
SR500	5"	1
SR600	6"	1



Rigid

Bushings

Insulated Malleable Iron Ground Bushings with Aluminum Lay-In Lug

Ground Lug
Capacity Size Std. Pkg.

RGB050M	#4 - #14	1/2"	100
RGB075M	#4 - #14	3/4"	50
RGB100M	#4 - #14	1"	25
RGB125M	#4 - #14	1-1/4"	25
RGB150M	#4 - #14	1-1/2"	25
RGB200M	#4 - #14	2"	25
RGB250M	1/0 - #8	2-1/2"	1
RGB300M	1/0 - #8	3"	1
RGB400M	1/0 - #8	4"	1
RGB500M	3/0 - #6	5"	1
RGB600M	3/0 - #6	6"	1



Plastic

Size Std. Pkg.

PB50	1/2"	100
PB75	3/4"	100
PB100	1"	50
PB125	1-1/4"	25
PB150	1-1/2"	25
PB200	2"	1
PB250	2-1/2"	1
PB300	3"	1
PB350	3-1/2"	1
PB400	4"	1
PB500	5"	1
PB600	6"	1



Malleable Iron – Insulated

Size Std. Pkg.

1206	1/2"	100
1207	3/4"	100
1208	1"	50
1209	1-1/4"	25
1210	1-1/2"	25
1211	2"	1
1212	2-1/2"	1
1213	3"	1
1214	3-1/2"	1
1215	4"	1
1216	5"	1
1217	6"	1



Swivel Fixture Hanger

Size Std. Pkg.

SWV4R (round)	Load Rating 50Lbs.	1/2" or 3/4"	1
SWV4S (square)			

Supplied with 3/4" x 1/2" Steel Reducer



Rigid

Locknuts

Steel	Size	Std. Pkg.
705X	3/8" Oversized Locknut	250
LN50	1/2"	100
LN75	3/4"	100
LN100	1"	50
LN125	1-1/4"	100
LN150	1-1/2"	100
LN200	2"	50
LN250	2-1/2"	50
LN300	3"	25
LN350	3-1/2"	25
LN400	4"	1
LN500	5"	1
LN600	6"	1
Aluminum	Size	Std. Pkg.
LN50AL	1/2"	100
LN75AL	3/4"	100
LN100AL	1"	50
LN125AL	1-1/4"	100
LN150AL	1-1/2"	100
LN200AL	2"	50
LN250AL	2-1/2"	50
LN300AL	3"	25
LN350AL	3-1/2"	25
LN400AL	4"	1
LN500AL	5"	1
LN600AL	6"	1
Sealing Locknut	Size	Std. Pkg.
706P	1/2"	100
707P	3/4"	100
708P	1"	50
709P	1-1/4"	1
710P	1-1/2"	1
711P	2"	1
712P	2-1/2"	1
713P	3"	1
714P	3-1/2"	1
715P	4"	1
716P	5"	1
717P	6"	1



705X



Offset Nipples

Die Cast	Malleable Iron	Size	Std. Pkg.
C41	OSN50	1/2"	10
C42	OSN75	3/4"	10
C43	OSN100	1"	10
C44	OSN125	1-1/4"	5
C45		1-1/2"	5
C46		2"	2



Rigid

Oil-Tight Hole Seals

	Size	Std. Pkg.
S050	1/2"	10
S075	3/4"	10
S100	1"	10
S125	1-1/4"	10
S150	1-1/2"	10
S200	2"	10
S250	2-1/2"	10
S300	3"	10
S350	3-1/2"	10
S400	4"	10

Available in Stainless Steel



Knock-Out Seals - Steel

	Size	Std. Pkg.
SS50	1/2"	200
SS52	3/4"	200
SS54	1"	200
SS56	1-1/4"	50
SS58	1-1/2"	50
SS60	2"	25
SS62*	2-1/2"	10
SS64*	3"	10
SS66*	3-1/2"	10
SS68*	4"	10

* Three Piece Design



Chase Nipples

Malleable Iron - Insulated

	Size	Std. Pkg.
MCN050I	1/2"	100
MCN075I	3/4"	100
MCN100I	1"	50
MCN125I	1-1/4"	25
MCN150I	1-1/2"	1
MCN200I	2"	1
MCN250I	2-1/2"	1
MCN300I	3"	1
MCN350I	3-1/2"	1
MCN400I	4"	1
995 (non-insulated)	5"	1
996 (non-insulated)	6"	1

Die Cast - Non Insulated

	Size	Std. Pkg.
90Z	1/2"	100
91Z	3/4"	100
92Z	1"	50
93Z	1-1/4"	25
94Z	1-1/2"	1
95Z	2"	1
96Z	2-1/2"	1
97Z	3"	1
98Z	3-1/2"	1
99Z	4"	1



Rigid

Service Entrance Heads - Threaded - Aluminum

	Size	Std. Pkg.
400	1/2"	10
401	3/4"	10
402	1"	10
403	1-1/4"	1
404	1-1/2"	1
405	2"	1
406	2-1/2"	1
407	3"	1
408	3-1/2"	1
409	4"	1



3 Piece Couplings - Malleable Iron

	Size	Std. Pkg.
3PC050	1/2"	20
3PC075	3/4"	10
3PC100	1"	1
3PC125	1-1/4"	1
3PC150	1-1/2"	1
3PC200	2"	1
3PC250	2-1/2"	2
3PC300	3"	2
3PC350	3-1/2"	1
3PC400	4"	1
3PC500	5"	1
3PC600	6"	1



Available in Hot Dipped Galvanized

Conduit Straps

One Hole - Steel	Size	Std. Pkg.
132S	1/2"	100
133S	3/4"	100
134S	1"	100
135S	1-1/4"	100
136S	1-1/2"	50
137S	2"	50
138S	2-1/2"	50
139S	3"	1
141S	3-1/2"	1
148S	4"	1
Two Hole - Steel	Size	Std. Pkg.
2132S	1/2"	250
2133S	3/4"	150
2134S	1"	100
2135S	1-1/4"	50
2136S	1-1/2"	50
2137S	2"	25
2138S	2-1/2"	25
2139S	3"	20
2141S	3-1/2"	15
2148S	4"	10
2150S	5"	10
2152S	6"	10



Rigid

Conduit Straps

One Hole - Malleable Iron	Size	Std. Pkg.
RSM050	1/2"	100
RSM075	3/4"	100
RSM100	1"	50
RSM125	1-1/4"	1
RSM150	1-1/2"	1
RSM200	2"	1
RSM250	2-1/2"	1
RSM300	3"	1
RSM350	3-1/2"	1
RSM400	4"	1
RSM500	5"	1
RSM600	6"	1

Available in Hot Dipped Galvanized



Clamp Backs - Malleable Iron

	Size	Std. Pkg.
BSC050	1/2"	100
BSC075	3/4"	100
BSC100	1"	50
BSC125	1-1/4"	50
BSC150	1-1/2"	1
BSC200	2"	1
BSC250	2-1/2"	1
BSC300	3"	1
BSC350	3-1/2"	1
BSC400	4"	1

Available in Hot Dipped Galvanized



Enlargers - Male to Female

	Size	Std. Pkg.
E35	1/2" Male - 3/4" Female	25
E36	3/4" Male - 1" Female	10
E37	1" Male - 1-1/4" Female	10
E38	1-1/4" Male - 1-1/2" Female	10



Floor Flanges

	Size	Std. Pkg.
1F	1/2"	1
2F	3/4"	1
3F	1"	1
4F	1-1/4"	1
5F	1-1/2"	1
6F	2"	1



Rigid

Conduit Hubs

Die Cast	Aluminum	Size	Std. Pkg.
WH10	TWH10A	1/2"	25
WH20	TWH20A	3/4"	25
WH30	TWH30A	1"	10
WH40	TWH40A	1-1/4"	5
WH50	TWH50A	1-1/2"	2
WH60	TWH60A	2"	2
WH70	TWH70A	2-1/2"	1
WH80	TWH80A	3"	1
WH90	TWH90A	3-1/2"	1
WH100	TWH100A	4"	1

Malleable Iron	Size	Std. Pkg.
CHM50	1/2"	25
CHM75	3/4"	25
CHM100	1"	10
CHM125	1-1/4"	5
CHM150	1-1/2"	2
CHM200	2"	2
CHM250	2-1/2"	1
CHM300	3"	1
CHM350	3-1/2"	1
CHM400	4"	1
CHM500	5"	1
CHM600	6"	1

Available in Hot Dipped Galvanized



Pull Elbows

Female to Female - Die Cast	Size	Std. Pkg.
1313	1/2"	10
1314	3/4"	5
1315	1"	25
1316	1-1/4"	20

Female to Female - Malleable Iron	Size	Std. Pkg.
PEF50	1/2"	10
PEF75	3/4"	5
PEF100	1"	1
PEF125	1-1/4"	1
PEF150	1-1/2"	1
PEF200	2"	1

Male to Female - Die Cast	Size	Std. Pkg.
1320	1/2"	10
1321	3/4"	5

Male to Female - Malleable Iron	Size	Std. Pkg.
PEM50	1/2"	10
PEM75	3/4"	5
PEM100	1"	1
PEM125	1-1/4"	1
PEM150	1-1/2"	1
PEM200	2"	1



Rigid

Set Screw Connectors & Couplings - Malleable Iron

Connectors	Size	Std. Pkg.
TRC50	1/2"	25
TRC75	3/4"	25
TRC100	1"	5
TRC125	1-1/4"	5
TRC150	1-1/2"	5
TRC200	2"	2
TRC250	2-1/2"	2
TRC300	3"	1
TRC350	3-1/2"	1
TRC400	4"	1

Available with Insulated Throat

Couplings	Size	Std. Pkg.
TRCC50	1/2"	25
TRCC75	3/4"	25
TRCC100	1"	5
TRCC125	1-1/4"	5
TRCC150	1-1/2"	5
TRCC200	2"	2
TRCC250	2-1/2"	2
TRCC300	3"	1
TRCC350	3-1/2"	1
TRCC400	4"	1



Compression Connectors & Couplings - Malleable Iron

Connectors	Size	Std. Pkg.
NTC50	1/2"	25
NTC75	3/4"	25
NTC100	1"	10
NTC125	1-1/4"	5
NTC150	1-1/2"	2
NTC200	2"	5
NTC250	2-1/2"	1
NTC300	3"	1
NTC350	3-1/2"	1
NTC400	4"	1

Available with Insulated Throat

Couplings	Size	Std. Pkg.
NTCC50	1/2"	25
NTCC75	3/4"	25
NTCC100	1"	10
NTCC125	1-1/4"	5
NTCC150	1-1/2"	2
NTCC200	2"	5
NTCC250	2-1/2"	1
NTCC300	3"	1
NTCC350	3-1/2"	1
NTCC400	4"	1



Rigid

Reducing Bushings

	Size	Std. Pkg.
RE21K	3/4" x 1/2"	200
RE31K	1" x 1/2"	100
RE32K	1" x 3/4"	
RE41K	1-1/4" x 1/2"	50
RE42K	1-1/4" x 3/4"	
RE43K	1-1/4" x 1"	
RE51K	1-1/2" x 1/2"	50
RE52K	1-1/2" x 3/4"	
RE53K	1-1/2" x 1"	
RE54K	1-1/2" x 1-1/4"	
RE62K	2" x 3/4"	25
RE63K	2" x 1"	
RE64K	2" x 1-1/4"	
RE65K	2" x 1-1/2"	
RE71K*	2-1/2" x 1/2"	10
RE72K*	2-1/2" x 3/4"	
RE73K*	2-1/2" x 1"	
RE74K*	2-1/2" x 1-1/4"	
RE75K*	2-1/2" x 1-1/2"	
RE76K*	2-1/2" x 2"	
RE81K*	3" x 1/2"	10
RE82K*	3" x 3/4"	
RE83K*	3" x 1"	
RE84K*	3" x 1-1/4"	
RE85K*	3" x 1-1/2"	
RE86K*	3" x 2"	
RE87K*	3" x 2-1/2"	
RE91K*	3-1/2" x 1/2"	5
RE92K*	3-1/2" x 3/4"	
RE93K*	3-1/2" x 1"	
RE94K*	3-1/2" x 1-1/4"	
RE95K*	3-1/2" x 1-1/2"	
RE96K*	3-1/2" x 2"	
RE97K*	3-1/2" x 2-1/2"	
RE98K*	3-1/2" x 3"	
RE101K*	4" x 1/2"	5
RE102K*	4" x 3/4"	
RE103K*	4" x 1"	
RE104K*	4" x 1-1/4"	
RE105K*	4" x 1-1/2"	
RE106K*	4" x 2"	
RE107K*	4" x 2-1/2"	
RE108K*	4" x 3"	
RE109K*	4" x 3-1/2"	
RE01210K	5" x 4"	1
RE01412K	6" x 5"	1

*Stocked with Hex Head



Rigid

Reducing Washers

	Size	Std. Pkg.
CW21	3/4" x 1/2"	250
CW31	1" x 1/2"	250
CW32	1" x 3/4"	250
CW41	1-1/4" x 1/2"	100
CW42	1-1/4" x 3/4"	100
CW43	1-1/4" x 1"	100
CW51	1-1/2" x 1/2"	100
CW52	1-1/2" x 3/4"	100
CW53	1-1/2" x 1"	100
CW54	1-1/2" x 1-1/4"	100
CW61	2" x 1/2"	50
CW62	2" x 3/4"	50
CW63	2" x 1"	50
CW64	2" x 1-1/4"	50
CW65	2" x 1-1/2"	50
CW71	2-1/2" x 1/2"	50
CW72	2-1/2" x 3/4"	50
CW73	2-1/2" x 1"	50
CW74	2-1/2" x 1-1/4"	50
CW75	2-1/2" x 1-1/2"	50
CW76	2-1/2" x 2"	50
CW81	3" x 1/2"	25
CW82	3" x 3/4"	25
CW83	3" x 1"	25
CW84	3" x 1-1/4"	25
CW85	3" x 1-1/2"	25
CW86	3" x 2"	25
CW87	3" x 2-1/2"	25
CW91	3-1/2" x 1/2"	10
CW92	3-1/2" x 3/4"	10
CW93	3-1/2" x 1"	10
CW94	3-1/2" x 1-1/4"	10
CW95	3-1/2" x 1-1/2"	10
CW96	3-1/2" x 2"	10
CW97	3-1/2" x 2-1/2"	10
CW98	3-1/2" x 3"	10
CW101	4" x 1/2"	10
CW102	4" x 3/4"	10
CW103	4" x 1"	10
CW104	4" x 1-1/4"	10
CW105	4" x 1-1/2"	10
CW106	4" x 2"	10
CW107	4" x 2-1/2"	10
CW108	4" x 3"	10
CW109	4" x 3-1/2"	10



Rigid

Conduit Bodies c/w Cover & Gasket - Aluminum

C	LB	LL	LR	T	Size	Std. Pkg.
C1ACG	LB1ACG	LL1ACG	LR1ACG	T1ACG	1/2"	50
C2ACG	LB2ACG	LL2ACG	LR2ACG	T2ACG	3/4"	50
C3ACG	LB3ACG	LL3ACG	LR3ACG	T3ACG	1"	25
C4ACG	LB4ACG	LL4ACG	LR4ACG	T4ACG	1-1/4"	10
C5ACG	LB5ACG	LL5ACG	LR5ACG	T5ACG	1-1/2"	10
C6ACG	LB6ACG	LL6ACG	LR6ACG	T6ACG	2"	5
C7ACG	LB7ACG	LL7ACG	LR7ACG	T7ACG	2-1/2"	1
C8ACG	LB8ACG	LL8ACG	LR8ACG	T8ACG	3"	1
C10ACG	LB10ACG	LL10ACG	LR10ACG	T10ACG	4"	1



Conduit Bodies c/w Cover & Gasket - Malleable Iron

C	LB	LL	LR	T	Size	Std. Pkg.
C1CG	LB1CG	LL1CG	LR1CG	T1CG	1/2"	10
C2CG	LB2CG	LL2CG	LR2CG	T2CG	3/4"	10
C3CG	LB3CG	LL3CG	LR3CG	T3CG	1"	5
C4CG	LB4CG	LL4CG	LR4CG	T4CG	1-1/4"	1
C5CG	LB5CG	LL5CG	LR5CG	T5CG	1-1/2"	1
C6CG	LB6CG	LL6CG	LR6CG	T6CG	2"	1
C7CG	LB7CG	LL7CG	LR7CG	T7CG	2-1/2"	1
C8CG	LB8CG	LL8CG	LR8CG	T8CG	3"	1
C9CG	LB9CG	LL9CG	LR9CG	T9CG	3-1/2"	1
C10CG	LB10CG	LL10CG	LR10CG	T10CG	4"	1



Available with Cast Covers

Available in Hot Dipped Galvanized

Form 7 Conduit Bodies c/w Cover & Gasket - Malleable Iron

C	LB	LL	LR	T	Size	Std. Pkg.
C17F7	LB17F7	LL17F7	LR17F7	T17F7	1/2"	10
C27F7	LB27F7	LL27F7	LR27F7	T27F7	3/4"	10
C37F7	LB37F7	LL37F7	LR37F7	T37F7	1"	5
C47F7	LB47F7	LL47F7	LR47F7	T47F7	1-1/4"	10
C57F7	LB57F7	LL57F7	LR57F7	T57F7	1-1/2"	10
C67F7	LB67F7	LL67F7	LR67F7	T67F7	2"	1
C77F7	LB77F7	LL77F7	LR77F7	T77F7	2-1/2"	1
C87F7	LB87F7	LL87F7	LR87F7	T87F7	3"	1
C97F7	LB97F7	LL97F7	LR97F7	T97F7	3-1/2"	1
C107F7	LB107F7	LL107F7	LR107F7	T107F	4"	1



Available with Cast Covers

Combo EMT/Rigid Conduit Bodies c/w Cover & Gasket

C	LB	LL	LR	T	Size	Std. Pkg.
C1CA	LB1CA	LL1CA	LR1CA	T1CA	1/2"	50
C2CA	LB2CA	LL2CA	LR2CA	T2CA	3/4"	50
C3CA	LB3CA	LL3CA	LR3CA	T3CA	1"	25
C4CA	LB4CA	LL4CA	LR4CA	T4CA	1-1/4"	10
C5CA	LB5CA	LL5CA	LR5CA	T5CA	1-1/2"	10
C6CA	LB6CA	LL6CA	LR6CA	T6CA	2"	5



Rigid

Cast Device Boxes

Single Gang		Type	Size	Std. Pkg.
FS50	FS1	Dead End - Shallow	1/2"	1
FS75	FS2	Dead End - Shallow	3/4"	1
FS100	FS3	Dead End - Shallow	1"	1
FSC50	FSC1	Pull Thru - Shallow	1/2"	1
FSC75	FSC2	Pull Thru - Shallow	3/4"	1
FSC100	FSC3	Pull Thru - Shallow	1"	1
FD50	FD1	Dead End - Deep	1/2"	1
FD75	FD2	Dead End - Deep	3/4"	1
FD100	FD3	Dead End - Deep	1"	1
FDC50	FDC1	Pull Thru - Deep	1/2"	1
FDC75	FDC2	Pull Thru - Deep	3/4"	1
FDC100	FDC3	Pull Thru - Deep	1"	1

Available in Hot Dipped Galvanized




Double Gang		Type	Size	Std. Pkg.
FS2-50		Dead End - Shallow	1/2"	1
FS2-75		Dead End - Shallow	3/4"	1
FS2-100		Dead End - Shallow	1"	1
FSC2-50		Pull Thru - Shallow	1/2"	1
FSC2-75		Pull Thru - Shallow	3/4"	1
FSC2-100		Pull Thru - Shallow	1"	1
FD2-50		Dead End - Deep	1/2"	1
FD2-75		Dead End - Deep	3/4"	1
FD2-100		Dead End - Deep	1"	1
FDC2-50		Pull Thru - Deep	1/2"	1
FDC2-75		Pull Thru - Deep	3/4"	1
FDC2-100		Pull Thru - Deep	1"	1

Available in Hot Dipped Galvanized

Device Box Covers

Single Gang		Type	Std. Pkg.
FSFD-CS1	Stamped Steel	Blank	5
FSFD-CS2	Stamped Steel	Switch	5
FSFD-CS3	Stamped Steel	Duplex	5
FSFD-CS4	Stamped Steel	GFI	5
FSFD-CM1	Malleable	Blank	5
FSFD-CM2	Malleable	Switch	5
FSFD-CM3	Malleable	Duplex	5
FSFD-CG	Gasket		10

Double Gang		Type	Std. Pkg.
FSFD2-CS1	Stamped Steel	Blank	5
FSFD2-CS2	Stamped Steel	Switch	10
FSFD2-CS3	Stamped Steel	Duplex	10
FSFD2-CS4	Stamped Steel	GFI	5
FSFD2-CS5	Stamped Steel	Switch /	10
FSFD2-CS6	Stamped Steel	Switch / Single	10
FSFD2-CM1	Malleable	Blank	10
FSFD2-CM2	Malleable	Switch	5
FSFD2-CG	Gasket		20

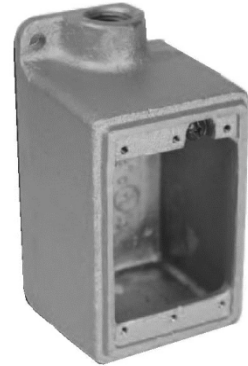

Conduit Hangers / Beam Clamps

Conduit Hangers with Bolt - Steel

	Size	Std. Pkg.
CLH050	3/8" - 1/2"	100
CLH075	3/4"	100
CLH100	1"	100
CLH125	1-1/4"	100
CLH150	1-1/2"	100
CLH200	2"	50
CLH250	2-1/2"	50
CLH300	3"	50
CLH350	3-1/2"	25
CLH400	4"	25

Beam Clamps - Malleable Iron

	Size	Std. Pkg.
620	1" (1/4-20)	25
502	2" (3/8-16)	25
627	2-1/2" (1/2-13)	25

J- Clamp

	Size	Std. Pkg.
JC50	1/2"	25
JC75	3/4"	25
JC100	1"	10
JC100-125	1" - 1-1/4"	1
JC150-200	1-1/2" - 2"	1
JC250-300	2-1/2" - 3"	1
JC350-400	3-1/2" - 4"	1

Right Angle

	Size	Std. Pkg.
RA050	1/2"	50
RA075	3/4"	50
RA100	1"	50
RA125	1-1/4"	25
RA150	1-1/2"	25
RA200	2"	25
RA250	2-1/2"	10
RA300	3"	10
RA350	3-1/2"	10
RA400	4"	10

Parallel Type

	Size	Std. Pkg.
PAR50	1/2"	50
PAR75	3/4"	50
PAR100	1"	50
PAR125	1-1/4"	25
PAR150	1-1/2"	25
PAR200	2"	25
PAR250	2-1/2"	10
PAR300	3"	10
PAR350	3-1/2"	10
PAR400	4"	10

Edge Type

	Size	Std. Pkg.
ET50	1/2"	50
ET75	3/4"	50
ET100	1"	50
ET125	1-1/4"	25
ET150	1-1/2"	25
ET200	2"	25



Conduit Hangers / Beam Clamps

U-Bolts - Hot Dipped Galvanized

	Size	Std. Pkg.
UB050HDG	1/2"	50
UB075HDG	3/4"	50
UB100HDG	1"	50
UB125HDG	1-1/4"	50
UB150HDG	1-1/2"	50
UB200HDG	2"	50
UB250HDG	2-1/2"	25
UB300HDG	3"	25
UB400HDG	4"	25



Explosion Proof Fittings

Explosion Proof Reducing Bushings

Steel	Aluminum	Size	Std. Pkg.
RB75-50S	RB75-50A	3/4" x 1/2"	50
RB100-50S	RB100-50A	1" x 1/2"	50
RB100-75S	RB100-75A	1" x 3/4"	50
RB125-50S	RB125-50A	1-1/4" x 1/2"	25
RB125-75S	RB125-75A	1-1/4" x 3/4"	
RB125-100S	RB125-100A	1-1/4" x 1"	
RB150-50S	RB150-50A	1-1/2" x 1/2"	25
RB150-75S	RB150-75A	1-1/2" x 3/4"	
RB150-100S	RB150-100A	1-1/2" x 1"	
RB150-125S	RB150-125A	1-1/2" x 1-1/4"	5
RB200-50S	RB200-50A	2" x 1/2"	
RB200-75S	RB200-75A	2" x 3/4"	
RB200-100S	RB200-100A	2" x 1"	
RB200-125S	RB200-125A	2" x 1-1/4"	
RB200-150S	RB200-150A	2" x 1-1/2"	



Larger Sizes Available

Explosion Proof Conduit Unions

Steel - Male	Size	Std. Pkg.
UM50S	1/2"	10
UM75S	3/4"	10
UM100S	1"	5
Steel - Female	Size	Std. Pkg.
UF50S	1/2"	10
UF75S	3/4"	10
UF100S	1"	5
Aluminum - Male	Size	Std. Pkg.
UM50A	1/2"	10
UM75A	3/4"	10
UM100A	1"	5
Aluminum - Female	Size	Std. Pkg.
UF50A	1/2"	10
UF75A	3/4"	10
UF100A	1"	5



Larger Sizes Available

Sealtite (Liquid-Tight) Connectors

Zinc Die Cast – Insulated Throat

Straight	Size	Std. Pkg.
LTC38Z	3/8"	25
LTC50Z	1/2"	25
LTC75Z	3/4"	10
LTC100Z	1"	5
LTC125Z	1-1/4"	5
LTC150Z	1-1/2"	1
LTC200Z	2"	1
LTC250Z	2-1/2"	1
LTC300Z	3"	1
LTC350Z	3-1/2"	1
LTC400Z	4"	1

90 Degree	Size	Std. Pkg.
LTC9038Z	3/8"	10
LTC9050Z	1/2"	10
LTC9075Z	3/4"	10
LTC90100Z	1"	5
LTC90125Z	1-1/4"	1
LTC90150Z	1-1/2"	1
LTC90200Z	2"	1
LTC90250Z	2-1/2"	1
LTC90300Z	3"	1
LTC90350Z	3-1/2"	1
LTC90400Z	4"	1



Malleable Iron - Insulated Throat

Straight	Size	Std. Pkg.
LTC38T	3/8"	25
LTC50T	1/2"	25
LTC75T	3/4"	10
LTC100T	1"	5
LTC125T	1-1/4"	5
LTC150T	1-1/2"	10
LTC200T	2"	5
LTC250T	2-1/2"	1
LTC300T	3"	1
LTC350T	3-1/2"	1
LTC400T	4"	1
LTC500T*	5"	1
LTC600T*	6"	1

90 Degree	45 Degree	Size	Std. Pkg.
LTC9038T	LTC4538T	3/8"	10
LTC9050T	LTC4550T	1/2"	10
LTC9075T	LTC4575T	3/4"	10
LTC90100T	LTC45100T	1"	5
LTC90125T	LTC45125T	1-1/4"	10
LTC90150T	LTC45150T	1-1/2"	10
LTC90200T	LTC45200T	2"	5
LTC90250T*	LTC45250T*	2-1/2"	1
LTC90300T*	LTC45300T*	3"	1
LTC90350T*	LTC45350T*	3-1/2"	1
LTC90400T*	LTC45400T*	4"	1



Available in Mechanical Galvanized

*Available in Hot Dipped Galvanized

Sealtite (Liquid-Tight) Connectors

Malleable Iron - Insulated Throat with Aluminum Ground Lug

Straight	Ground Lug Capacity	Size	Std. Pkg.
SLT47ALT	#4 - #14	3/8"	25
SLT27ALT	#4 - #14	1/2"	25
SLT28ALT	#4 - #14	3/4"	10
SLT29ALT	#4 - #14	1"	5
SLT30ALT	#4 - #14	1-1/4"	5
SLT31ALT	#4 - #14	1-1/2"	10
SLT32ALT	#4 - #14	2"	5
SLT33ALT	1/0 - #8	2-1/2"	1
SLT34ALT	1/0 - #8	3"	1
SLT60ALT	3/0 - #6	3-1/2"	1
SLT61ALT	3/0 - #6	4"	1
SLT62ALT	#6 - 250mcm	5"	1
SLT63ALT	#6 - 250mcm	6"	1



90 Degree	45 Degree	Ground Lug Capacity	Size	Std. Pkg.
SLT25ALT	SLT25-45ALT	#4 - #14	3/8"	10
SLT35ALT	SLT35-45ALT	#4 - #14	1/2"	10
SLT36ALT	SLT36-45ALT	#4 - #14	3/4"	10
SLT37ALT	SLT37-45ALT	#4 - #14	1"	5
SLT38ALT	SLT38-45ALT	#4 - #14	1-1/4"	10
SLT39ALT	SLT39-45ALT	#4 - #14	1-1/2"	10
SLT40ALT	SLT40-45ALT	#4 - #14	2"	5
SLT65ALT	SLT65-45ALT	1/0 - #8	2-1/2"	1
SLT66ALT	SLT66-45ALT	1/0 - #8	3"	1
SLT67ALT	SLT67-45ALT	3/0 - #6	3-1/2"	1
SLT68ALT	SLT68-45ALT	3/0 - #6	4"	1



Available with Copper Grounding Lugs

Sealtite (Liquid-Tight) Flexible Conduit

	Size	Std. Pkg.
CSALT-3/8	3/8"	30 meter carton*
CSALT-1/2	1/2"	30 meter carton*
CSALT-3/4	3/4"	30 meter carton*
CSALT-1	1"	30 meter carton*
CSALT-1-1/4	1-1/4"	15 meter carton*
CSALT-1-1/2	1-1/2"	15 meter carton
CSALT-2	2"	15 meter carton
CSALT-2-1/2	2-1/2"	15 meter carton
CSALT-3	3"	8 meter carton
CSALT-4	4"	8 meter carton

Cut Lengths Available 2" thru 4"

* Available on Reels

Note: Standard freight terms do not apply



Aluminum Flexible Conduit and Connectors

	Size	Std. Pkg.
HWA-3/8	3/8"	75 meter coil*
HWA-7/16	7/16"	75 meter coil*
HWA-1/2	1/2"	30 meter coil*
HWA-3/4	3/4"	30 meter coil*
HWA-1	1"	30 meter coil*
HWA-1-1/4	1-1/4"	15 meter coil*
HWA-1-1/2	1-1/2"	15 meter coil*
HWA-2	2"	8 meter coil*
HWA-2-1/2	2-1/2"	8 meter coil
HWA-3	3"	8 meter coil
HWA-4	4"	8 meter coil

Cut Lengths Available 2" thru 4"

* Available on Reels

Note: Standard freight terms do not apply



Flexible Conduit Connectors

Straight	Type	Size	Std. Pkg.
C27Z	Zinc Die Cast	1/2"	25
C28Z	Zinc Die Cast	3/4"	25
C29Z	Zinc Die Cast	1"	10
C30Z	Zinc Die Cast	1-1/4"	10
C31Z	Zinc Die Cast	1-1/2"	5
C32Z	Zinc Die Cast	2"	10
C32	Malleable Iron	2"	1
C33	Malleable Iron	2-1/2"	1
C34	Malleable Iron	3"	1
C61	Malleable Iron	4"	1

90 Degree	Type	Size	Std. Pkg.
C35Z	Zinc Die Cast	1/2"	25
C36Z	Zinc Die Cast	3/4"	10
C37Z	Zinc Die Cast	1"	5
C38Z	Zinc Die Cast	1-1/4"	10
C39Z	Zinc Die Cast	1-1/2"	1
C40Z	Zinc Die Cast	2"	1
C40	Malleable Iron	2"	1
C65	Malleable Iron	2-1/2"	1
C66	Malleable Iron	3"	1
C68	Malleable Iron	4"	1



Rigid Conduit Couplings – Galvanized

	Size	Std. Pkg.
COUP050	1/2"	100
COUP075	3/4"	50
COUP100	1"	30
COUP125	1-1/4"	25
COUP150	1-1/2"	25
COUP200	2"	20
COUP250	2-1/2"	24
COUP300	3"	16
COUP350	3-1/2"	12
COUP400	4"	10
COUP500	5"	1
COUP600	6"	1



Rigid Conduit Nipples – Galvanized

1/2"	Length	Std. Pkg.
NP050XCL	CLOSE	25
NP050X200	2"	25
NP050X250	2-1/2"	25
NP050X300	3"	25
NP050X400	4"	25
NP050X600	6"	25
NP050X800	8"	25
NP050X1000	10"	25
NP050X1200	12"	25
3/4"	Length	Std. Pkg.
NP075XCL	CLOSE	25
NP075X200	2"	25
NP075X250	2-1/2"	25
NP075X300	3"	25
NP075X400	4"	25
NP075X600	6"	25
NP075X800	8"	25
NP075X1000	10"	25
NP075X1200	12"	25
1"	Length	Std. Pkg.
NP100XCL	CLOSE	25
NP100X200	2"	25
NP100X250	2-1/2"	25
NP100X300	3"	25
NP100X400	4"	25
NP100X600	6"	25
NP100X800	8"	25
NP100X1000	10"	25
NP100X1200	12"	25



Rigid Conduit Nipples – Galvanized

1-1/4"	Length	Std. Pkg.
NP125XCL	CLOSE	25
NP125X200	2"	25
NP125X250	2-1/2"	25
NP125X300	3"	25
NP125X400	4"	25
NP125X600	6"	25
NP125X800	8"	12
NP125X1000	10"	12
NP125X1200	12"	12

1-1/2"	Length	Std. Pkg.
NP150XCL	CLOSE	25
NP150X200	2"	25
NP150X250	2-1/2"	25
NP150X300	3"	25
NP150X400	4"	25
NP150X600	6"	25
NP150X800	8"	12
NP150X1000	10"	12
NP150X1200	12"	12

2"	Length	Std. Pkg.
NP200XCL	CLOSE	25
NP200X250	2-1/2"	25
NP200X300	3"	25
NP200X400	4"	25
NP200X600	6"	25
NP200X800	8"	12
NP200X1000	10"	12
NP200X1200	12"	12

2-1/2"	Length	Std. Pkg.
NP250XCL	CLOSE	10
NP250X300	3"	10
NP250X400	4"	10
NP250X600	6"	10
NP250X800	8"	5
NP250X1000	10"	5
NP250X1200	12"	5

3"	Length	Std. Pkg.
NP300XCL	CLOSE	12
NP300X400	4"	10
NP300X600	6"	10
NP300X800	8"	10
NP300X1000	10"	5
NP300X1200	12"	5

4"	Length	Std. Pkg.
NP400XCL	CLOSE	10
NP400X400	4"	10
NP400X600	6"	10
NP400X800	8"	5
NP400X1000	10"	5
NP400X1200	12"	5



Rigid Conduit Nipples – Galvanized

5"	Length	Std. Pkg.
NP500XCL	CLOSE	4
NP500X600	6"	4
NP500X800	8"	2
NP500X1000	10"	2
NP500X1200	12"	2

6"	Length	Std. Pkg.
NP600XCL	CLOSE	4
NP600X600	6"	4
NP600X800	8"	2
NP600X1000	10"	2
NP600X1200	12"	2



Aluminum Conduit Couplings

	Size	Std. Pkg.
COUP050AL	1/2"	100
COUP075AL	3/4"	50
COUP100AL	1"	30
COUP125AL	1-1/4"	25
COUP150AL	1-1/2"	25
COUP200AL	2"	20
COUP250AL	2-1/2"	24
COUP300AL	3"	16
COUP350AL	3-1/2"	10
COUP400AL	4"	10



Aluminum Conduit Elbows

90 Degree	45 Degree	Size	Std. Pkg.
SWEEP050AL	SWEEP050-45AL	1/2"	50
SWEEP075AL	SWEEP075-45AL	3/4"	50
SWEEP100AL	SWEEP100-45AL	1"	25
SWEEP125AL	SWEEP125-45AL	1-1/4"	20
SWEEP150AL	SWEEP150-45AL	1-1/2"	15
SWEEP200AL	SWEEP200-45AL	2"	10
SWEEP250AL	SWEEP250-45AL	2-1/2"	1
SWEEP300AL	SWEEP300-45AL	3"	1
SWEEP400AL	SWEEP400-45AL	4"	1



Aluminum Conduit Nipples

1/2"	Length	Std. Pkg.
NP050XCLAL	CLOSE	25
NP050X200AL	2"	25
NP050X250AL	2-1/2"	25
NP050X300AL	3"	25
NP050X400AL	4"	25
NP050X600AL	6"	25
NP050X800AL	8"	25
NP050X1000AL	10"	25
NP050X1200AL	12"	25

3/4"	Length	Std. Pkg.
NP075XCLAL	CLOSE	25
NP075X200AL	2"	25
NP075X250AL	2-1/2"	25
NP075X300AL	3"	25
NP075X400AL	4"	25
NP075X600AL	6"	25
NP075X800AL	8"	25
NP075X1000AL	10"	25
NP075X1200AL	12"	25

1"	Length	Std. Pkg.
NP100XCLAL	CLOSE	25
NP100X200AL	2"	25
NP100X250AL	2-1/2"	25
NP100X300AL	3"	25
NP100X400AL	4"	25
NP100X600AL	6"	25
NP100X800AL	8"	25
NP100X1000AL	10"	25
NP100X1200AL	12"	25

1-1/4"	Length	Std. Pkg.
NP125XCLAL	CLOSE	25
NP125X200AL	2"	25
NP125X250AL	2-1/2"	25
NP125X300AL	3"	25
NP125X400AL	4"	25
NP125X600AL	6"	25
NP125X800AL	8"	12
NP125X1000AL	10"	12
NP125X1200AL	12"	12

1-1/2"	Length	Std. Pkg.
NP150XCLAL	CLOSE	25
NP150X200AL	2"	25
NP150X250AL	2-1/2"	25
NP150X300AL	3"	25
NP150X400AL	4"	25
NP150X600AL	6"	25
NP150X800AL	8"	12
NP150X1000AL	10"	12
NP150X1200AL	12"	12



Aluminum Conduit Nipples

2"	Length	Std. Pkg.
NP200XCLAL	CLOSE	25
NP200X250AL	2-1/2"	25
NP200X300AL	3"	25
NP200X400AL	4"	25
NP200X600AL	6"	25
NP200X800AL	8"	12
NP200X1000AL	10"	12
NP200X1200AL	12"	12

2-1/2"	Length	Std. Pkg.
NP250XCLAL	CLOSE	12
NP250X300AL	3"	12
NP250X400AL	4"	12
NP250X600AL	6"	12
NP250X800AL	8"	5
NP250X1000AL	10"	5
NP250X1200AL	12"	5

3"	Length	Std. Pkg.
NP300XCLAL	CLOSE	12
NP300X400AL	4"	10
NP300X600AL	6"	10
NP300X800AL	8"	10
NP300X1000AL	10"	5
NP300X1200AL	12"	5

3-1/2"	Length	Std. Pkg.
NP350XCLAL	CLOSE	10
NP350X400AL	4"	6
NP350X600AL	6"	5
NP350X800AL	8"	3
NP350X1000AL	10"	3
NP350X1200AL	12"	3

4"	Length	Std. Pkg.
NP400XCLAL	CLOSE	10
NP400X400AL	4"	10
NP400X600AL	6"	10
NP400X800AL	8"	5
NP400X1000AL	10"	5
NP400X1200AL	12	5



Stainless Steel

Conduit

Type 304SS	Type 316SS	Size	Std. Length
CND50-304	CND50-316	1/2"	10 FEET
CND75-304	CND75-316	3/4"	10 FEET
CND100-304	CND100-316	1"	10 FEET
CND125-304	CND125-316	1-1/4"	10 FEET
CND150-304	CND150-316	1-1/2"	10 FEET
CND200-304	CND200-316	2"	10 FEET
CND250-304	CND250-316	2-1/2"	10 FEET
CND300-304	CND300-316	3"	10 FEET
CND350-304	CND350-316	3-1/2"	10 FEET
CND400-304	CND400-316	4"	10 FEET

Note: standard freight terms do not apply



Conduit Couplings

Type 304SS	Type 316SS	Size	Std. Pkg.
CPL50-304	CPL50-316	1/2"	1
CPL75-304	CPL75-316	3/4"	1
CPL100-304	CPL100-316	1"	1
CPL125-304	CPL125-316	1-1/4"	1
CPL150-304	CPL150-316	1-1/2"	1
CPL200-304	CPL200-316	2"	1
CPL250-304	CPL250-316	2-1/2"	1
CPL300-304	CPL300-316	3"	1
CPL350-304	CPL350-316	3-1/2"	1
CPL400-304	CPL400-316	4"	1



Conduit Elbows – 90°

Type 304SS	Type 316SS	Size	Std. Pkg.
ELB50-304	ELB50-316	1/2"	1
ELB75-304	ELB75-316	3/4"	1
ELB100-304	ELB100-316	1"	1
ELB125-304	ELB125-316	1-1/4"	1
ELB150-304	ELB150-316	1-1/2"	1
ELB200-304	ELB200-316	2"	1
ELB250-304	ELB250-316	2-1/2"	1
ELB300-304	ELB300-316	3"	1
ELB350-304	ELB350-316	3-1/2"	1
ELB400-304	ELB400-316	4"	1



Conduit Elbows – 45°

Type 304SS	Type 316SS	Size	Std. Pkg.
ELB50-45-304	ELB50-45-316	1/2"	1
ELB75-45-304	ELB75-45-316	3/4"	1
ELB100-45-304	ELB100-45-316	1"	1
ELB125-45-304	ELB125-45-316	1-1/4"	1
ELB150-45-304	ELB150-45-316	1-1/2"	1
ELB200-45-304	ELB200-45-316	2"	1
ELB250-45-304	ELB250-45-316	2-1/2"	1
ELB300-45-304	ELB300-45-316	3"	1
ELB350-45-304	ELB350-45-316	3-1/2"	1
ELB400-45-304	ELB400-45-316	4"	1



Stainless Steel

Conduit Nipples

Type 304SS	Type 316SS	Size	Std. Pkg.
NIP50X*-304	NIP50X*-316	1/2"	1
NIP75X*-304	NIP75X*-316	3/4"	1
NIP100X*-304	NIP100X*-316	1"	1
NIP125X*-304	NIP125X*-316	1-1/4"	1
NIP150X*-304	NIP150X*-316	1-1/2"	1
NIP200X*-304	NIP200X*-316	2"	1


Replace * with Required Length



Conduit Bodies c/w Cover & Gasket - Type 316SS

LB	LL	LR	Size	Std. Pkg.
7050LB			1/2"	1
7075LB	7075LL	7075LR	3/4"	1
7100LB	7100LL	7100LR	1"	1
7125LB			1-1/4"	1
7150LB	7150LL	7150LR	1-1/2"	1
7200LB	7200LL	7200LR	2"	1
7250LB			2-1/2"	1
7300LB			3"	1
7400LB			4"	1

C	I	TB	X	Size	Std. Pkg.
7050C	7050T			1/2"	1
7075C	7075T	7075TB	7075X	3/4"	1
7100C	7100T	7100TB	7100X	1"	1
7125C	7125T	7125TB		1-1/4"	1
7150C	7150T	7150TB		1-1/2"	1
7200C	7200T	7200TB		2"	1
	7250T			2-1/2"	1
	7300T			3"	1
	7400T			4"	1

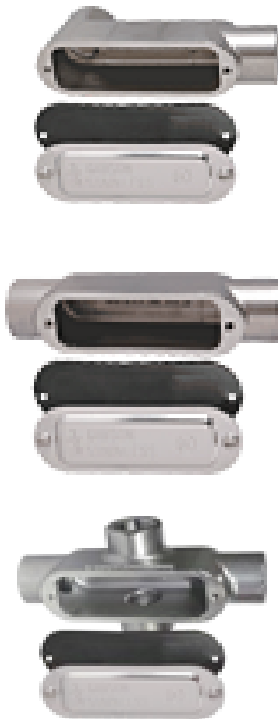

Hubs - Type 316SS

Standard	Grounding	Size	Std. Pkg.
7050HUB	7050G-HUB	1/2"	1
7075HUB	7075G-HUB	3/4"	1
7100HUB	7100G-HUB	1"	1
7125HUB	7125G-HUB	1-1/4"	1
7150HUB	7150G-HUB	1-1/2"	1
7200HUB	7200G-HUB	2"	1
7250HUB	7250G-HUB	2-1/2"	1
7300HUB	7300G-HUB	3"	1
7400HUB	7400G-HUB	4"	1



Stainless Steel

Conduit Straps - Type 316SS

One Hole	Two Hole	Size	Std. Pkg.
	3038-2	3/8"	1
3050	3050-2	1/2"	1
3075	3075-2	3/4"	1
3100	3100-2	1"	1
3125	3125-2	1-1/4"	1
3150	3150-2	1-1/2"	1
3200	3200-2	2"	1
3250	3250-2	2-1/2"	1
3300	3300-2	3"	1
3350	3350-2	3-1/2"	1
3400	3400-2	4"	1



Clamp Back Spacers - Type 316SS

	Size	Std. Pkg.
CBS3050	1/2"	1
CBS3075	3/4"	1
CBS3100	1"	1
CBS3125	1-1/4"	1
CBS3150	1-1/2"	1
CBS3200	2"	1
CBS3250	2-1/2"	1
CBS3300	3"	1
CBS3350	3-1/2"	1
CBS3400	4"	1



Conduit Caps - Type 316SS

	Size	Std. Pkg.
CAP50	1/2"	1
CAP75	3/4"	1
CAP100	1"	1
CAP125	1-1/4"	1
CAP150	1-1/2"	1
CAP200	2"	1
CAP250	2-1/2"	1
CAP300	3"	1
CAP400	4"	1



Floor Flanges - Type 316SS

	Size	Std. Pkg.
FF50	1/2"	1
FF75	3/4"	1
FF100	1"	1
FF125	1-1/4"	1
FF150	1-1/2"	1
FF200	2"	1



Pulling Elbows - Type 316SS

	Size	Std. Pkg.
PE50	1/2"	1
PE75	3/4"	1
PE100	1"	1
PE150	1-1/2"	1
PE200	2"	1



Stainless Steel

Three Piece Couplings - Type 316SS

	Size	Std. Pkg.
TPC50	1/2"	1
TPC75	3/4"	1
TPC100	1"	1
TPC125	1-1/4"	1
TPC150	1-1/2"	1
TPC200	2"	1



Chase Nipples - Type 316SS

	Size	Std. Pkg.
CHASE50	1/2"	1
CHASE75	3/4"	1
CHASE100	1"	1
CHASE125	1-1/4"	1
CHASE150	1-1/2"	1
CHASE200	2"	1
CHASE250	2-1/2"	1
CHASE300	3"	1
CHASE400	4"	1




Locknuts - Type 316SS

Standard	Grounding	Size	Std. Pkg.
8050	8050G	1/2"	1
8075	8075G	3/4"	1
8100	8100G	1"	1
8125	8125G	1-	1
8150	8150G	1-	1
8200	8200G	2"	1
8250	8250G	2-	1
8300	8300G	3"	1
8400	8400G	4"	1




Device Boxes - Type 316SS

Single Gang	Type	Hub Size	Std. Pkg.
FD75	Dead End	3/4"	1
FDA75	Back Entry	3/4"	1
FDC75	Pull Thru	3/4"	1
FDS75	2 Entry on Same Side	3/4"	1
FDCT75	T Pattern	3/4"	1
FDX75	X Pattern	3/4"	1
Double Gang	Type	Hub Size	Std. Pkg.
FDDX75	X Pattern	3/4"	1



Device Box Covers - Type 316SS

Single Gang	Type	Std. Pkg.
7000BC	Blank (Cast)	1
7000BF	Blank (Formed)	1
7000RF	Duplex Receptacle (Formed)	1
7000SF	Switch (Formed)	1
Double Gang	Type	Std. Pkg.
7000BC2	Blank (Cast)	1
7000BF2	Blank (Formed)	1



Stainless Steel


Conduit Hangers - Type 316SS

	Size	Std. Pkg.
6050	1/2"	1
6075	3/4"	1
6100	1"	1
6125	1-1/4"	1
6150	1-1/2"	1
6200	2"	1
6250	2-1/2"	1
6300	3"	1
6400	4"	1



Beam Clamps - Type 316SS

2000 Series	Size	Std. Pkg.
2001	1/4"	1
2003	3/8"	1
2004	1/2"	1
2100 Series	Size	Std. Pkg.
2103	3/8"	1
2104	1/2"	1
Junior Top	Size	Std. Pkg.
JTB375	3/8"	1
JTB500	1/2"	1
Right Angle	Size	Std. Pkg.
1050	1/2"	1
1075	3/4"	1
1100	1"	1
1125	1-1/4"	1
1150	1-1/2"	1
1200	2"	1
1250	2-1/2"	1
1300	3"	1
1350	3-1/2"	1
1400	4"	1
1600	6"	1
Parallel	Size	Std. Pkg.
4075	3/4"	1
4100	1"	1



Sealtite Connectors - Type 316SS

Straight	90 Degree	45 Degree	Size	Std. Pkg.
LTC50SS	LTC9050SS	LTC4550SS	1/2"	1
LTC75SS	LTC9075SS	LTC4575SS	3/4"	1
LTC100SS	LTC90100SS	LTC45100SS	1"	1
LTC125SS	LTC90125SS	LTC45125SS	1-1/4"	1
LTC150SS	LTC90150SS	LTC45150SS	1-1/2"	1
LTC200SS	LTC90200SS	LTC45200SS	2"	1



Stainless Steel

Threaded Plugs - Type 316SS

Hex Head	Socket	Size	Std. Pkg.
	7025SP	1/4"	1
7038P	7038SP	3/8"	1
7050P	7050SP	1/2"	1
7075P	7075SP	3/4"	1
7100P	7100SP	1"	1
7125P	7125SP	1-1/4"	1
7150P	7150SP	1-1/2"	1
7200P	7200SP	2"	1
7250P		2-1/2"	1
7300P		3"	1
7400P		4"	1



Threaded Reducing Bushings - Type 316SS

Hex Head	Face (Flush)	Size	Std. Pkg.
7500-RB50X25		1/2" X 1/4"	1
7500-RB50X38		1/2" X 3/8"	
7500-RB75X25		3/4" X 1/4"	1
7500-RB75X38		3/4" X 3/8"	
7500-RB75X50	7500-FB75X50	3/4" X 1/2"	1
7500-RB100X38		1" X 3/8"	
7500-RB100X50	7500-FB100X50	1" X 1/2"	1
7500-RB100X75	7500-FB100X75	1" X 3/4"	
7500-RB125X50	7500-FB125X50	1-1/4" X 1/2"	1
7500-RB125X75	7500-FB125X75	1-1/4" X 3/4"	
7500-RB125X100	7500-FB125X100	1-1/4" X 1"	1
7500-RB150X50	7500-FB150X50	1-1/2" X 1/2"	
7500-RB150X75	7500-FB150X75	1-1/2" X 3/4"	1
7500-RB150X100	7500-FB150X100	1-1/2" X 1"	
7500-RB150X125	7500-FB150X125	1-1/2" X 1-1/4"	1
7500-RB200X50	7500-FB200X50	2" X 1/2"	
7500-RB200X75	7500-FB200X75	2" X 3/4"	1
7500-RB200X100	7500-FB200X100	2" X 1"	
7500-RB200X125	7500-FB200X125	2" X 1-1/4"	1
7500-RB200X150	7500-FB200X150	2" X 1-1/2"	
7500-RB250X50		2-1/2" X 1/2"	1
7500-RB250X75		2-1/2" X 3/4"	
7500-RB250X100		2-1/2" X 1"	1
7500-RB250X125		2-1/2" X 1-1/4"	
7500-RB250X150		2-1/2" X 1-1/2"	1
7500-RB250X200		2-1/2" X 2"	
7500-RB300X100		3" X 1"	1
7500-RB300X125		3" X 1-1/4"	
7500-RB300X150		3" X 1-1/2"	1
7500-RB300X200		3" X 2"	
7500-RB300X250		3" X 2-1/2"	1
7500-RB400X125		4" X 1-1/4"	
7500-RB400X150		4" X 1-1/2"	1
7500-RB400X200		4" X 2"	
7500-RB400X250		4" X 2-1/2"	1
7500-RB400X300		4" X 3"	



Stainless Steel

Hazardous Location EYS Fittings - Type 316SS

	Size	Std. Pkg.
EYS75	3/4"	1
EYS100	1"	1



Hazardous Location Junction Boxes - Type 316SS

	Configuration	Hub Size	Std. Pkg.
GUAC75SS	C	3/4"	1
GUAC100SS	C	1"	1
GUAT75SS	T	3/4"	1
GUAT100SS	T	1"	1
GUAX75SS	X	3/4"	1
GUAX100SS	X	1"	1
GUAB75SS	LB	3/4"	1
GUAB100SS	LB	1"	1
GUAL75SS	LL	3/4"	1
GUAL100SS	LL	1"	1



Insulated Bushings – Type 316SS

	Size	Std. Pkg.
B50	1/2"	1
B75	3/4"	1
B100	1"	1
B125	1-1/4"	1
B150	1-1/2"	1
B200	2"	1



Grounding Insulated Bushings – Type 316SS

	Wire Range	Size	Std. Pkg.
GB50S	4-14	1/2"	1
GB75S	4-14	3/4"	1
GB100S	4-14	1"	1
GB125S	4-14	1-1/4"	1
GB150S	4-14	1-1/2"	1
GB200S	4-14	2"	1
GB50L	3/0-6	1/2"	1
GB75L	3/0-6	3/4"	1
GB100L	3/0-6	1"	1
GB125L	3/0-6	1-1/4"	1
GB150L	3/0-6	1-1/2"	1



Stainless Steel

Strain Relief Grips - Type 316SS

Cord Grip	Cord Grip with Mesh	Cable Range (inches)	Std. Pkg.
1/2"			
CG50-125188	CGM50-125188	.125 - .188	1
CG50-188250	CGM50-188250	.188 - .250	1
CG50-250313	CGM50-250313	.250 - .313	1
CG50-313375	CGM50-313375	.313 - .375	1
CG50-375438	CGM50-375438	.375 - .438	1
CG50-438500	CGM50-438500	.438 - .500	1
CG50-500563	CGM50-500563	.500 - .563	1
CG50-563610	CGM50-563610	.536 - .610	1

3/4"			
CG75-188250	CGM75-188250	.188 - .250	1
CG75-250313	CGM75-250313	.250 - .313	1
CG75-313375	CGM75-313375	.313 - .375	1
CG75-375438	CGM75-375438	.375 - .438	1
CG75-438500	CGM75-438500	.438 - .500	1
CG75-500563	CGM75-500563	.500 - .563	1
CG75-563625	CGM75-563625	.563 - .625	1
CG75-625688	CGM75-625688	.625 - .688	1
CG75-688750	CGM75-688750	.688 - .750	1
CG75-750810	CGM75-750810	.750 - .810	1

1"			
CG100-375438	CGM100-375438	.375 - .438	1
CG100-438500	CGM100-438500	.438 - .500	1
CG100-500563	CGM100-500563	.500 - .563	1
CG100-563625	CGM100-563625	.563 - .625	1
CG100-625688	CGM100-625688	.625 - .688	1
CG100-688750	CGM100-688750	.688 - .750	1
CG100-750813	CGM100-750813	.750 - .813	1

Support Grips - Single Eye, Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050US	.50 - .62	1050	1
SPSR062US	.63 - .74	2050	1
SPSR075US	.75 - .99	2050	1
SPSR100US	1.00 - 1.24	2650	1
SPSR125US	1.25 - 1.49	4500	1
SPSR150US	1.50 - 1.74	4500	1
SPSR175US	1.75 - 1.99	6000	1
SPSR200US	2.00 - 2.49	8950	1
SPSR250US	2.50 - 2.99	7750	1
SPSR300US	3.00 - 3.49	8500	1



Stainless Steel

U-Bolts - Type 316SS

Standard	Figure 137 Style	Size	Std. Pkg.
0050	0050-137	1/2"	1
0075	0075-137	3/4"	1
0100	0100-137	1"	1
0125	0125-137	1-1/4"	1
0150	0150-137	1-1/2"	1
0200	0200-137	2"	1
0250	0250-137	2-1/2"	1
0300	0300-137	3"	1
0350	0350-137	3-1/2"	1
0400	0400-137	4"	1
0500		5"	1
0600		6"	1
0800		8"	1
01000		10"	1
01200		12"	1
01400		14"	1
01600		16"	1
01800		18"	1
02000		20"	1

U-Bolt Plates also Available

Strut Channel - 1-5/8 x 1-5/8

Type 304SS	Type	Std. Pkg.
PS200SS304	Solid	10 Feet
PS200SS304EH	With Elongated Holes	10 Feet
Type 316SS	Type	
PS200SS316	Solid	10 Feet
PS200SS316EH	With Elongated Holes	10 Feet

Note: standard freight terms do not apply

Post Bases -Type 316SS

Post Bases -Type 316SS	Type	Std. Pkg.
5990PB1	Single Post Base - Square	1
5990PB2	Single Post Base - 45° Offset	1
5990PB3	Single Post Base - Flush Mount	1
5990PB4	Double Post Base - Square	1
5990PB5	Single Post Base - Narrow Foot	1

Spring Nuts - Type 316SS Spring - Type 302SS

	Size	Std. Pkg.
5911	1/4"	1
5912	5/16"	1
5913	3/8"	1
5914	1/2"	1
5915	5/8"	1



Stainless Steel

2 Piece Strut Straps - Type 316SS

	Size	Std. Pkg.
5050	1/2"	1
5075	3/4"	1
5100	1"	1
5125	1-1/4"	1
5150	1-1/2"	1
5200	2"	1
5250	2-1/2"	1
5300	3"	1
5350	3-1/2"	1
5400	4"	1
5500	5"	1
5600	6"	1
5800	8"	1



Strut Fittings and Accessories - Type 316SS

Right Angle Beam Clamps

	Size	Std. Pkg.
5990	1-5/8" x 1-5/8"	1
5990L	1-5/8" x 3-1/4"	1



Square Washer

	Size	Std. Pkg.
5970-1/4	1/4"	1
5970-3/8	3/8"	1
5970-1/2	1/2"	1
5970-5/8	5/8"	1
5970-3/4	3/4"	1



90 Degree Angle Fittings

	Type	Std. Pkg.
5971	2 Hole	1
5974	3 Hole	1
5973	4 Hole	1

Flat Fittings

	Type	Std. Pkg.
5963	3 Hole 90	1
5964	4 Hole 90	1
5965	Cross Plate	1
5969	4 Hole Splice	1
5966	Tee Plate	1




Other Stainless Steel Strut Fitting Available - Please Call

Strut Fittings

Spring Nuts - Regular Spring

	Size	Std. Pkg.
FNS25	1/4" - 20	100
C7RS	5/16" - 18	100
FNS38	3/8" - 16	100
FNS50	1/2" - 13	100
C12RS	5/8" - 11	100
C13RS	3/4" - 10	100



Stainless Steel, Short, Long or No Spring versions are available

Flat Plate Fittings

	Type	Std. Pkg.
C601	2 Hole Splice Plate	50
C602GA	3 Hole Splice Plate	25
C723GA	4 Hole Splice Plate	25
C718GA	3 Hole Flat Angle Plate	50
C719GA	4 Hole Flat Angle Plate	20
C714GA	T Plate	25
C712	Cross Plate	10
C619*	Square Washer	10



Splice Plates


*Specify Hole Size



C718GA




C719GA



C714GA



C712GA



C619

90 Degree Fittings

	Type	Std. Pkg.
C603GA	2 Hole End Angle	50
C604	2 Hole Corner Angle	50
C605GA	3 Hole Corner Angle	25
C607GA	4 Hole Corner Angle	25



C603GA



C604



C605GA



C607GA

Strut Fittings

Angle Fittings

	Type	Std. Pkg.
C793*	4 Hole Closed Angle	25
C781*	4 Hole Open Angle	25
C624*	2 Hole Closed Angle	25
C633*	2 Hole Open Angle	25
PS9402	2 Hole Hinge Connector	1
PS9403	3 Hole Hinge Connector	1
PS9404	4 Hole Hinge Connector	1

*Specify Angle



C793




C781




C624




C633



PS9402




PS9403




PS9404

U Support Z Fittings & Joiners


	Type	Std. Pkg.
C613	U Support	15
C611	Z Fitting - 1-5/8" Channel	15
C612	Z Fitting - 1" Channel	25
C631	2 Hole Strut Joiner	25
C616	4 Hole Strut Joiner	10
C649A*	Strut Joiner - Stamped Steel	25




C613



C611



C612



C631




C616




C649A

Post Bases


	Type	Std. Pkg.
C3033	Single Post Base - Offset	5
PS3033SQA	Single Post Base - Square	5
C3064	Double Post Base - Offset	5
C3064SQ	Double Post Base - Square	5




C3033



PS3033SQA



C3064



C3064SQ

Strut Fittings

Beam Clamps

	Type	Load Rating / Lbs.	Std. Pkg.
C684S	I Beam Clamp	500	10
C685S	Beam Clamp	450	10
C686	Beam Clamp	600 with 12 ga. Channel 500 with 14 ga. Channel	10
PS855-1	Angular I Beam Clamp	500	15
PS2651T1GA	U-Bolt Style Clamp - Double Strut	1000	25
PS2651T2GA	U-Bolt Style Clamp - Single Strut	1000	25
C907S	I Beam Clamp - 1/4" Stock Thickness	450	25
C998	I Beam Clamp - 3/8" Stock Thickness	900	25
C2622	Beam Clamp	300	25
C2654	Column Bracket	800	25
C858*	C Clamp - 7/8" Jaw Opening	Varies with rod size - call	1
C865*	C Clamp - 1-21/32" Jaw Opening	Varies with rod size - call	1
PS86*	C Clamp	Varies with rod size - call	1
PS93*	Universal Top or Bottom C Clamp 1-1/4" Jaw Opening	Varies with rod size - call	1
PS94*	Wide Throat Top C Clamp 1-5/16" Jaw Opening	Varies with rod size - call	1

***Specify Rod Size"**



C684S



C685S



C686



PS855-1



PS2651T1GA



PS2651T2GA



C907S / C998



C2622



C2654




C858




C865



PS86



PS93



PS94


Strut Fittings

Brackets	Type	Std. Pkg.
C3373GA	Universal Corner Connector	10
C651*	Reversible Channel Bracket – 1-5/8 x 1-5/8	1
C809*	Double Channel Bracket – 1-5/8 x 3-1/4	1
C3282*	Cable Tray Strut Bracket – 1 x 1-5/8	1
C732*	Shelf Bracket	1


*Specify Length Required




C3373GA




C651



C809



C3282



C732


Trolleys	Type	Std. Pkg.
P2749	2 Wheel Trolley with Eye-Bolt	1
P2751	4 Wheel Trolley with Eye-Bolt	1
FJ103	2 Wheel Flat Bar Trolley	1
FJ108	4 Wheel Flat Bar Trolley	1




P2749



P2751




FJ103



FJ108


Miscellaneous Fittings	Std. Pkg.
C2625	Wiring Stud Nut - 1/2" Thread 25
C2636	Fixture Stud Nut - 1/4" Thread 200
C2631	Swing Gate Fixture Hanger 10
C655	Hammer-In Steel End Cap 100
PS6153-2GY	Rubber End Cap - Grey 10
PS6154-2GY	Plastic Profile End Cap - Grey 10
PS707P	Plastic Closure Strip - Grey 10



C2631



C2625




C2636




C655



PS6153-2GY



PS6154

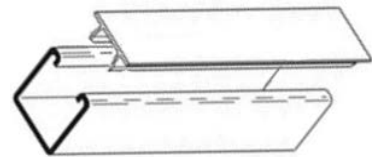

PS707P

Strut Fittings

EMT Pipe Straps - 2 Piece

	Size	Std. Pkg.
C1025	3/8"	100
C1026	1/2"	100
C1027	3/4"	100
C1028	1"	100
C1029	1-1/4"	50
C1030	1-1/2"	50
C1031	2"	50
CL250*	2-1/2"	50
CL300*	3"	50
C1134*	3-1/2"	25
CL400*	4"	25

* Universal both EMT and Rigid

Rigid Pipe Straps - 2 Piece

Steel	Size	Std. Pkg.
C1125	3/8"	100
CL050	1/2"	100
CL075	3/4"	100
CL100	1"	100
CL125	1-1/4"	50
CL150	1-1/2"	50
CL200	2"	50
CL250	2-1/2"	50
CL300	3"	50
C1134	3-1/2"	25
CL400	4"	25
C1137	5"	25
C1138	6"	25
C1140	8"	25
C1100-10	10"	25
C1100-12	12"	25

Available in Stainless steel - see Page 72

Available in Hot Dipped Galvanized, Please Call

Aluminum

	Size	Std. Pkg.
C1126AL	1/2"	100
C1127AL	3/4"	100
C1128AL	1"	100
C1129AL	1-1/4"	50
C1130AL	1-1/2"	50
C1131AL	2"	50
C1132AL	2-1/2"	50
C1133AL	3"	50
C1134AL	3-1/2"	25
C1135AL	4"	25
C1137AL	5"	25



Strut Fittings

Adjustable Pipe and Cable Clamps

Steel	Conduit Size	Range (inches)	Std. Pkg.
PCC050PG	1/2" RIGID OR EMT	.650 - .890	100
PCC075PG	3/4" RIGID OR EMT	.860 - 1.110	100
PCC100PG	1" RIGID OR EMT	1.100 - 1.400	100
PCC125GG	1-1/4" RIGID OR EMT	1.400 - 1.725	50
PCC150PG	1-1/2" RIGID OR EMT	1.690 - 1.980	50
PCC200PG	2" RIGID OR EMT	1.980 - 2.576	50
PCC250PG	2-1/2" RIGID OR EMT	2.576 - 3.060	25
PCC300PG	3" RIGID OR EMT	3.060 - 3.625	25
PCC350PG	3-1/2" RIGID OR EMT	3.626 - 4.126	25
PCC400PG	4" RIGID OR EMT	4.126 - 4.626	25




Stainless Steel	Conduit Size	Range (inches)	Std. Pkg.
C55SS	-	.050 - .550	100
C81SS	3/8" & 1/2" RIGID OR EMT	.250 - .840	100
C135SS	3/4" & 1" RIGID OR EMT	.850 - 1.350	100
C175SS	1" & 1-1/4" RIGID / 1-1/4" EMT	1.250 - 1.750	50
C205SS	1-1/4" & 1-1/2" RIGID / 1-1/2" EMT	1.550 - 2.050	50
C250SS	2" RIGID OR EMT	2.000 - 2.500	50
C300SS	2-1/2" RIGID OR EMT	2.500 - 3.000	50
C375SS	3" RIGID OR EMT	3.250 - 3.750	25
C425SS	3-1/2" RIGID OR EMT	3.750 - 4.250	25
C475SS	4" RIGID OR EMT	4.250 - 4.750	25




Many other strut items available, including:


Cush-A-Clamps for Pipes, Copper or Steel Tubing



Porc-A-Clamps for Cable



Winged Fittings



Please call us with all your strut fitting requirements

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
0050-137	69	1206	40	133x563CH	14	142x122	14
0050	69	1207	40	133x564CH	14	142x123	12
0075-137	69	1208	40	133x565CH	5	142x552	1
0075	69	1209	40	133x575CH	4	142x553	12
0100-137	69	1210	40	133x585CH	4	142x570	2
0100	69	1211	40	133x587CH	4	142x572	1
01000	69	1212	40	133x588CH	4	142x574	13
01200	69	1213	40	133x595CH	4	142x970	2
0125-137	69	1214	40	133x596CH	5	143S	36
0125	69	1215	40	133x597CH	5	143x123	2
01400	69	1216	40	133x598CH	5	143x124	2
0150-137	69	1217	40	133x611CH	14	143x126	2
0150	69	1234 series	35	133x953CH	4	143x306	3
01600	69	1241/20	30	133x955CH	4	143x552	3
01800	69	1241Q/20	30	1343548	2	143x553	3
0200-137	69	1241S/20	30	1343553	3	143x554	3
0200	69	1242/20	30	1343555	3	143x555	3
02000	69	1242Q/20	30	1343570	2	143x559	14
0250-137	69	1242S/20	30	1343572	2	143x561	14
0250	69	1244/20	30	1343580	2	143x563	14
0300-137	69	1244Q/20	30	1343582	3	143x587	4
0300	69	1250	37	1343585	4	143x590	13
0350-137	69	1250	65	1343588	4	143x953	4
0350	69	1251	37	1343595	4	143x955	3
0400-137	69	1300	65	1343596	5	144S	36
0400	69	1313	45	1343597	5	144x122	14
0500	69	1314	45	134S	43	144x401	3
0600	69	1315	45	1350	65	144x551	4
0800	69	1316	45	135S	43	144x553	14
1050	65	1320	45	135x601CH	5	144x557	4
1075	65	1321	45	135x605CH	6	144x560	3
10B	35	1326	37	135x701CH	5	144x569	14
10BG	35	1327	37	135x702CH	6	144x575	14
10BR	35	1328	37	135x703CH	6	144x614	15
1100	65	1329	37	135x704CH	6	1453401	6
1121	26	132S	43	135x705CH	6	145S	36
1125	65	132x122CH	13	135x706CH	6	145x129	5
1150	65	132x422CH	13	135x707CH	6	145x282	15
1185/20	30	132x474CH	13	135x708CH	6	145x301	5
1185/20	30	132x570CH	2	136S	43	145x408	5
1185Q/20	30	132x572CH	1	137S	43	145x411	5
1185Q/20	30	132x574CH	13	138S	36	145x552	4
1185S/20	30	132x579CH	12	138S	43	145x573	14
1186/20	30	132x580CH	2	139S	36	145x579	4
1186Q/20	30	132x670CH	12	139S	43	145x583	14
1186S/20	30	132x970CH	2	1400	65	145x586	5
1188/20	30	132x972CH	2	140x303	2	145x592	5
1188Q/20	30	1331348CH	5	140x401	2	145x594	4
1188S/20	30	1332	37	140x402	2	145x599	15
1189/20	30	1333	37	140x404	3	145x606	14
1189Q/20	30	133S	43	140x410	3	145x610	15
1189S/20	30	133x126CH	2	140x801	2	145x613	15
1193/20	30	133x270CH	15	141S	36	145x615	15
1193Q/20	30	133x272CH	15	141S	43	145x986	5
1194/20	30	133x280CH	15	141x201	12	145x992	5
1194Q/20	30	133x305CH	3	141x202	12	146S	36
1194S/20	30	133x320CH	5	141x203	13	147S	36
1195/20	30	133x324CH	3	141x205	12	148S	36
1195Q/20	30	133x360CH	4	141x300	1	148S	43
1195S/20	30	133x552CH	3	141x301	12	1502DJ	16
1196/20	30	133x554CH	3	141x400	1	1502H	16
1196Q/20	30	133x555CH	3	141x403	1	1502MCJ	16
1196S/20	30	133x558CH	14	142S	36	1502SC	16
1200	65	133x559CH	14	142x121	1	1502ST	16

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
1502STD	16	1706SC	18	3075	63	522F28	23
1504DJ	16	1706STD	18	3075-2	63	5243	25
1504H	16	1707SC	18	3100	63	5250	70
1504MCJ	16	1707STD	18	3100-2	63	5300	70
1504SC	16	1708SC	18	3125	63	531SWH	24
1504ST	16	1708STD	18	3125-2	63	531SWHO	24
1504STD	16	1709SC	18	3150	63	531SWHOX	24
1506DJ	16	1709STD	18	3150-2	63	531SWN	24
1506H	16	170C	37	3200	63	532SWH	24
1506MCJ	16	1710SC	18	3200-2	63	532SWHO	24
1506SC	16	1710STD	18	3250	63	532SWHOX	24
1506ST	16	1711SC	18	3250-2	63	532SWN	24
1506STD	16	1711STD	18	3300	63	5350	70
1508DJ	16	1712SC	18	3300-2	63	5400	70
1508H	16	1712STD	18	3350	63	5415	25
1508MCJ	16	171C	37	3350-2	63	5416	25
1508SC	16	172C	37	3400	63	5500	70
1508ST	16	173C	37	3400-2	63	559600	24
1508STD	16	1F	44	3451	25	559620	24
1512DJ	16	2001	65	3455	26	5600	70
1512H	16	2003	65	3456	25	571DWH	24
1512MCJ	16	2004	65	3459	25	571DWHO	24
1512SC	16	2015-3A	24	34B	35	571DWHOX	24
1512ST	16	2015-3B	24	35A	35	571DWN	24
1512STD	16	2015-3C	24	36A	35	572DWH	24
1600	65	2015-4C	24	3819	26	572DWHO	24
1602DJ	17	2074	26	3F	44	572DWHOX	24
1602H	17	2103	65	3PC series	43	572DWN	24
1602MCJ	17	2104	26	400	43	5800	70
1602SC	17	2104	65	401	43	5898	25
1602ST	17	2117	25	402	43	5899	25
1602STD	17	2132	25	403	43	5900	25
1604DJ	17	2132S	43	404	43	5901	25
1604H	17	2133S	43	405	43	5902	25
1604MCJ	17	2134	25	406	43	5903	25
1604SC	17	2134S	43	407	43	5904	25
1604ST	17	2135S	43	4075	65	5905	25
1604STD	17	2136S	43	408	43	5906	25
1606DJ	17	2137S	43	409	43	5911	69
1606H	17	2138S	36	4100	65	5912	69
1606MCJ	17	2138S	43	4247	25	5913	69
1606SC	17	2139S	36	4252	25	5914	69
1606ST	17	2139S	43	4311	25	5915	69
1606STD	17	2141S	36	4F	44	5963	70
1608DJ	17	2141S	43	500AH	24	5964	70
1608H	17	2142S	36	500AN	24	5965	70
1608MCJ	17	2143S	36	500AN	24	5966	70
1608SC	17	2144S	36	500H	24	5969	70
1608ST	17	2145	25	500N	24	5970 series	70
1608STD	17	2145S	36	502	51	5971	70
1612DJ	17	2146S	36	5050	70	5973	70
1612H	17	2147S	36	5075	70	5974	70
1612MCJ	17	2148S	36	5100	70	5990 series	69
1612SC	17	2148S	43	511B	24	5990	70
1612ST	17	2150S	43	511BG	24	5990L	70
1612STD	17	2152S	43	511BO	24	5F	44
1702SC	18	2211	25	511BOX	24	600	69
1702STD	18	2212	25	5125	70	6050	65
1703SC	18	2213	25	5126	25	6075	65
1703STD	18	2214	25	5150	70	6100	65
1704SC	18	2F	44	5200	70	6125	65
1704STD	18	3038-2	63	522B12	23	6150	65
1705SC	18	3050	63	522B14	23	620	51
1705STD	18	3050-2	63	522D28	23	6200	65

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
6250	65	7125P	66	8050G	64	C1025	75
627	51	7125SP	66	8075	64	C1026	75
6300	65	7125T	62	8075G	64	C1027	75
632DA	23	7125TB	62	8100	64	C1028	75
632DC3A	23	712P	41	8100G	64	C1029	75
632S	23	713P	41	8125	64	C1030	75
632SC3	23	714P	41	8125G	64	C1031	75
635S	23	7150C	62	8150	64	C107F7	49
6400	65	7150G-HUB	62	8150G	64	C10ACG	49
642S	23	7150HUB	62	8200	64	C10ATCG	36
670A RZ series	20	7150LB	62	8200G	64	C10CG	49
671 RZ series	20	7150LL	62	8250	64	C1100-10	75
672 RZ series	20	7150LR	62	8250G	64	C1100-12	75
6F	44	7150P	66	8300	64	C1125	75
7000BC	64	7150SP	66	8300G	64	C1126AL	75
7000BC2	64	7150T	62	8400	64	C1127AL	75
7000BF	64	7150TB	62	8400G	64	C1128AL	75
7000BF2	64	715P	41	885 RZ series	19	C1129AL	75
7000RF	64	716P	41	88SH1-05	23	C1130AL	75
7000SF	64	717P	41	88SH2-05	23	C1131AL	75
7025SP	66	7200C	62	88SN1-05	23	C1132AL	75
7038P	66	7200G-HUB	62	88SN2-02	23	C1133AL	75
7038SP	66	7200HUB	62	90Z	42	C1134	75
7050C	62	7200LB	62	91Z	42	C1134AL	75
7050G-HUB	62	7200LL	62	92161	22	C1135AL	75
7050HUB	62	7200LR	62	92180	22	C1137	75
7050LB	62	7200P	66	92181	22	C1137AL	75
7050P	66	7200SP	66	92Z	42	C1138	75
7050SP	66	7200T	62	93121	22	C1140	75
7050T	62	7200TB	62	93141	22	C12RS	71
705X	41	72180	22	93161	22	C135SS	76
706P	41	72181	22	93180	22	C13RS	71
7075C	62	7250G-HUB	62	93181	22	C175SS	76
7075G-HUB	62	7250HUB	62	93Z	42	C17F7	49
7075HUB	62	7250LB	62	94161	22	C1ACG	49
7075LB	62	7250P	66	94181	22	C1CA	37/49
7075LL	62	7250T	62	94Z	42	C1CG	49
7075LR	62	7300G-HUB	62	95181	22	C205SS	76
7075P	66	7300HUB	62	95Z	42	C250SS	76
7075SP	66	7300LB	62	96Z	42	C2622	73
7075T	62	7300P	66	97Z	42	C2625	74
7075TB	62	7300T	62	985 GP series	19	C2631	74
7075X	62	73122	22	98Z	42	C2636	74
707P	41	73142	22	995	42	C2654	73
708P	41	73161	22	996	42	C27F7	49
709P	41	73181	22	99Z	42	C27Z	55
7100C	62	7400G-HUB	62	ABBIT series	29	C28Z	55
7100G-HUB	62	7400HUB	62	ABPTM series	29	C29Z	55
7100HUB	62	7400LB	62	ACBR series	28	C2ACG	49
7100LB	62	7400P	66	AESC series	28	C2CA	37/49
7100LL	62	7400T	62	AL1/0	35	C2CG	49
7100LR	62	74122	22	AL250	35	C300SS	76
7100P	66	74142	22	AL3/0	35	C3033	72
7100SP	66	74161	22	AL4	35	C3064	72
7100T	62	74162	22	AWCSM series	28	C3064SQ	72
7100TB	62	74181	22	B100	67	C30Z	55
7100X	62	7500-FB series	66	B125	67	C31Z	55
710182	22	7500-RB series	66	B150	67	C32	55
710P	41	75181	22	B200	67	C3282	74
711P	41	76162	22	B50	67	C32Z	55
7125C	62	77182	22	B75	67	C33	55
7125G-HUB	62	78162	22	BFPB-37 series	9	C3373GA	74
7125HUB	62	800	69	BFPB-50 series	9	C34	55
7125LB	62	8050	64	BSC series	44	C35Z	55

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
C36Z	55	C793	72	DLFAN	27	LB57F7	49
C375SS	76	C7ACG	49	DTG series	29	LB5ACG	49
C37F7	49	C7ATCG	36	E35	44	LB5CA	37/49
C37Z	55	C7CG	49	E36	44	LB5CG	49
C38Z	55	C7RS	71	E37	44	LB67F7	49
C39Z	55	C809	74	E38	44	LB6ACG	49
C3ACG	49	C81SS	76	ELB series	61	LB6CA	37/49
C3CA	37/49	C858	73	EPBAD series	7-8	LB6CG	49
C3CG	49	C865	73	EPBAP series	7-8	LB77F7	49
C40	55	C87F7	49	EPBCD series	7-8	LB7ACG	49
C40Z	55	C8ACG	49	EPBCP series	7-8	LB7ATCG	36
C41	41	C8ATCG	36	ERC22	37	LB7CG	49
C42	41	C8CG	49	ERC23	37	LB87F7	49
C425SS	76	C907S	73	ERC24	37	LB8ACG	49
C43	41	C97F7	49	ET series	51	LB8ATCG	36
C44	41	C998	73	EYS100	67	LB8CG	49
C45	41	C9CG	49	EYS75	67	LB97F7	49
C46	41	CAP series	63	FD series	50	LB9CG	49
C475SS	76	CBS series	63	FD75	64	LL107F7	49
C47F7	49	CC140x	15	FDA75	64	LL10ACG	49
C4ACG	49	CC141x	15	FDC series	50	LL10ATCG	36
C4CA	37/49	CC142x	15	FDC75	64	LL10CG	49
C4CG	49	CC143x	15	FDCT75	64	LL17F7	49
C55SS	76	CC144x	15	FDDX75	64	LL1ACG	49
C57F7	49	CC145x	15	FDS75	64	LL1CA	37/49
C5ACG	49	CC15xx	16	FF series	63	LL1CG	49
C5CA	37/49	CC16xx	17	FJ103	74	LL27F7	49
C5CG	49	CC17xx	18	FJ108	74	LL2ACG	49
C601	71	CG (ss) series	68	FNS25	71	LL2CA	37/49
C602GA	71	CG100 series	39	FNS38	71	LL2CG	49
C603GA	71	CG125 series	39	FNS50	71	LL37F7	49
C604	71	CG150 series	39	FS series	50	LL3ACG	49
C605GA	71	CG50 series	39	FSC series	50	LL3CA	37/49
C607GA	71	CG75 series	39	FSFD series	50	LL3CG	49
C61	55	CGM series	68	FW	27	LL47F7	49
C611	72	CH132x	15	FWB	27	LL4ACG	49
C612	72	CH1331	11	GB series	67	LL4CA	37/49
C613	72	CH1332	11	GUA series	67	LL4CG	49
C616	72	CH133x	15	HDLED-HEAD	27	LL57F7	49
C619	71	CH1343	15	HVPB series	10	LL5ACG	49
C624	72	CH1351	15	HWA series	55	LL5CA	37/49
C631	72	CHASE series	64	JC series	51	LL5CG	49
C633	72	CHM series	45	JTB375	65	LL67F7	49
C649A	72	CL series	75	JTB500	65	LL6ACG	49
C65	55	CL2	27	LB107F7	49	LL6CA	37/49
C651	74	CLH series	51	LB10ACG	49	LL6CG	49
C655	74	CND series	61	LB10ATCG	36	LL77F7	49
C66	55	COUP (alum) series	58	LB10CG	49	LL7ACG	49
C67F7	49	COUP (steel) series	56	LB17F7	49	LL7ATCG	36
C68	55	CPL series	61	LB1ACG	49	LL7CG	49
C684S	73	CSALT series	54	LB1CA	37/49	LL87F7	49
C685S	73	CT	27	LB1CG	49	LL8ACG	49
C686	73	CW series	48	LB27F7	49	LL8ATCG	36
C6ACG	49	CW15xx	16	LB2ACG	49	LL8CG	49
C6CA	37/49	CW16xx	17	LB2CA	37/49	LL97F7	49
C6CG	49	DL24HDLED	27	LB2CG	49	LL9CG	49
C712	71	DL24P	27	LB37F7	49	LN series	41
C714GA	71	DL24PLED	27	LB3ACG	49	LR107F7	49
C718GA	71	DL40HDLED	27	LB3CA	37/49	LR10ACG	49
C719GA	71	DL40P	27	LB3CG	49	LR10ATCG	36
C723GA	71	DL40PLED	27	LB47F7	49	LR10CG	49
C732	74	DL60HDLED	27	LB4ACG	49	LR17F7	49
C77F7	49	DL60P	27	LB4CA	37/49	LR1ACG	49
C781	72	DL60PLED	27	LB4CG	49	LR1CA	37/49

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
LR1CG	49	RB series	52	S4070	38	SA44A1	32
LR27F7	49	RE series	47	S4071	38	SA44A3	33
LR2ACG	49	RGB series	40	S4072	38	SA45-2N	32
LR2CA	37/49	RSM series	44	S4073	38	SA46-2N	32
LR2CG	49	S050	42	S4075	38	SA4C	31
LR37F7	49	S075	42	S4A4-1000N	34	SA500	34
LR3ACG	49	S100	42	S4A4-600N	34	SA600-2NS	34
LR3CA	37/49	S1010RT	38	SA0	34	SA600	34
LR3CG	49	S1011RT	38	SA1000-2N	34	SA6C	31
LR47F7	49	S1012RT	38	SA1000	34	SA6S	34
LR4ACG	49	S1013RT	38	SA1C-2N	32	SA800-2N	34
LR4CA	37/49	S1014RT	38	SA1C	31	SA800	34
LR4CG	49	S1015DRT	38	SA2	34	SAL series	31
LR57F7	49	S1015ERT	38	SA2/0	34	SB2-300	34
LR5ACG	49	S1015FRT	38	SA25-2N	32	SB2-600	34
LR5CA	37/49	S1015RT	38	SA25	31	SB2-800	34
LR5CG	49	S1016RT	38	SA250	34	SB3-600	34
LR67F7	49	S1017RT	38	SA26-2N	32	SB4-600	34
LR6ACG	49	S1018RT	38	SA26	31	SB4-800	34
LR6CA	37/49	S1019RT	38	SA26A1	32	SDL40HDLED	27
LR6CG	49	S1020RT	38	SA26A3	33	SDL40P	27
LR77F7	49	S1021DRT	38	SA27-2N	32	SDL40PLED	27
LR7ACG	49	S1021ERT	38	SA27	31	SDL60HDLED	27
LR7ATCG	36	S1021FRT	38	SA27A3	32	SDL60P	27
LR7CG	49	S1021RT	38	SA27A5	33	SDL60PLED	27
LR87F7	49	S1110	38	SA28-2N	32	SG10 series	26
LR8ACG	49	S1111	38	SA28	31	SG20 series	26
LR8ATCG	36	S1112	38	SA28A3	32	SG30 series	26
LR8CG	49	S1112A	38	SA28A5	33	SLT series	54
LR97F7	49	S1112B	38	SA29-2N	32	SPSR (ss) series	68
LR9CG	49	S1112C	38	SA29	31	SPSR series	29-30
LTC (ss) series	65	S1112D	38	SA29A1	32	SR series	39
LTC series	53	S1112E	38	SA29A3	33	SS1C	32
MCN series	42	S1112F	38	SA2C-2N	32	SS25	32
NIP series	62	S1113	38	SA2C	31	SS26	32
NP (alum) series	59-60	S1114	38	SA30-2N	32	SS26A1	33
NP (steel) series	56-58	S1115	38	SA30	31	SS27	32
NTC series	46	S1115A	38	SA300	34	SS27A1	33
NTCC series	46	S1115B	38	SA30A3	32	SS28	32
OSN series	41	S1115C	38	SA30A3	33	SS28A1	33
P2749	74	S1115D	38	SA31-2N	32	SS29	32
P2751	74	S1115E	38	SA31	31	SS29A1	33
PAR series	51	S1115F	38	SA31A1	32	SS2C	32
PB series	40	S125	42	SA31A3	33	SS30	32
PCC series	76	S150	42	SA32-2N	32	SS30A1	33
PE series	63	S200	42	SA32	31	SS31	32
PEF series	45	S250	42	SA32A1	32	SS31A1	33
PEM series	45	S300	42	SA32A3	33	SS32	32
PHS series	30	S350	42	SA34-2N	32	SS32A1	33
PS200 series	69	S3A4 series	34	SA34	31	SS34	32
PS2651T1GA	73	S400	42	SA34A1	32	SS34A1	33
PS2651T2GA	73	S4060RT	38	SA34A3	33	SS36	32
PS3033SQGA	72	S4061RT	38	SA350-2NS	34	SS36A1	33
PS6153-2GY	74	S4062RT	38	SA350	34	SS39	32
PS6154-2GY	74	S4063RT	38	SA36-2N	32	SS39A1	33
PS707P	74	S4064RT	38	SA36	31	SS44	32
PS855-1	73	S4065DRT	38	SA36A1	32	SS44A1	33
PS86	73	S4065ERT	38	SA36A3	33	SS4C	32
PS93	73	S4065FRT	38	SA39-2N	32	SS50	42
PS94	73	S4065RT	38	SA39	31	SS52	42
PS9402	72	S4066	38	SA39A3	32	SS54	42
PS9403	72	S4067	38	SA39A5	33	SS56	42
PS9404	72	S4068	38	SA44-2N	32	SS58	42
RA series	51	S4069	38	SA44	31	SS60	42

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
SS62	42	SYP series	33	T57F7	49	TS14-4-4	28
SS64	42	SYPO series	33	T5ACG	49	TS2-3/0-4	28
SS66	42	T107F	49	T5CA	37/49	TS4/0-400-4	28
SS68	42	T10ACG	49	T5CG	49	TS5-3-2/0-3	28
SS6C	32	T10CG	49	T67F7	49	TS5-3/0-400-3	28
SSL series	32	T17F7	49	T6ACG	49	TS5-500-1000-3	28
SU0	34	T1ACG	49	T6CA	37/49	TS500-1000-4	28
SU1000-2NS	34	T1CA	37/49	T6CG	49	TT	27
SU1000	34	T1CG	49	T77F7	49	TWH series	45
SU2/0	34	T27F7	49	T7ACG	49	TWIN632S	23
SU250	34	T2ACG	49	T7CG	49	TWIN635S	23
SU350-2N	34	T2CA	37/49	T87F7	49	TWIN88SH1-05	23
SU350	34	T2CG	49	T8ACG	49	TWIN88SH2-05	23
SU600-2NS	34	T37F7	49	T8CG	49	TWIN88SN1-05	23
SU600	34	T3ACG	49	T91S	23	TWIN88SN2-02	23
SU800-2NS	34	T3CA	37/49	T91SC36	23	UB series	52
SU800	34	T3CG	49	T97F7	49	UF series	52
SW44S	40	T47F7	49	T9CG	49	UM series	52
SWEEP (alum) series	58	T4ACG	49	TPC series	64	UMT1006RE	26
SWEEP (EMT) series	36	T4CA	37/49	TRC series	46	WCSS series	29
SWV4R	40	T4CG	49	TRCC series	46	WH series	45

Summit Electric Products Ltd. – Sales Representatives

ALBERTA

Please contact Summit Electric

Phone: 1-800-265-4822 Fax: (519) 250-8389

Email: sales@summit-electric.com

BRITISH COLUMBIA

Division 16 Sales Agency

23017 Olund Crescent

Maple Ridge, BC V2X 9L3

Phone: 1-604-908-5565

Email: kyle@div16.ca

MANITOBA & N.W. ONTARIO

Douglas A. Ligertwood Ltd.

832 St. Mary's Road

Winnipeg, MB R2M 3P4

Peter Ligertwood

Phone: (204) 233-6873 Fax: (204) 237-0996

Cell: (204) 228-5487

Email: office@daligertwood.com

NEW BRUNSWICK

E.L.P. Marketing Ltd.

28 Reade Street

Moncton, NB E1C 6R9

Tim Geldart C.E.T.

Cell: (506) 871-4090

Email: tgeldart@elpmarketing.ca

NEWFOUNDLAND

E.L.P. Marketing Ltd.

PO Box 799

41 Badcock Blvd

Bay Roberts, NL A0A 1G0

Robert Norman

Cell: (709) 746-5919

Email: rob@elp.ns.ca

NOVA SCOTIA

E.L.P. Marketing Ltd.

32 McQuade Lake Cr.

Bayers Lake Industrial Park

Halifax, NS B3S 1B6

Greg Drysdale C.E.T.

Cell: (902) 441-6449

Email: gdrysdale@elp.ns.ca

ONTARIO

Humelec Associates Ltd.

2320 Tedlo Street, Unit 2

Mississauga, ON L5A 4A2

Phone: (905) 276-3301

Fax: (905) 276-7013

Bill Eckersley

Email: beckersley@humelec.ca

Bruno Neale

Email: bneale@humelec.ca

P. E. I.

E.L.P. Marketing Ltd.

28 Reade Street

Moncton, NB E1C 6R9

Tim Geldart C.E.T.

Cell: (506) 871-4090

Email: tgeldart@elp.ns.ca

QUEBEC

Promellis Inc.

11345 Montee Sainte Marianne, Suite #201

Mirabel, QC J7J 2B2

Fax: (514) 745-4069

Annick Jolicoeur

Phone: (514) 745-0259 ext 114

Email: annickjolicoeur@promellis.com

Mathieu St-Onge

Phone: (514) 745-0259 ext 102

Email: mstonge@promellis.com

SASKATCHEWAN

Advance Electrical Agency

2717B Wentz Avenue

Saskatoon, SK S7K 4B6

Darren Churchwell

Cell: (306) 653-0313 Fax: (306) 244-4070

Email: darren@advanceagency.net

Bob Fiesel

Cell: (306) 552-8686

Email: bob@advanceagency.net