



STANDARD PRODUCTS CATALOG – MAY 2021

marathon™
Special Products



GIBSON STAINLESS
& SPECIALTY INC.



R.S. DALE CO. INC.
STRUT FITTINGS

SteelElectric
PRODUCTS



INTERNATIONAL
GREAT HOSE COMPANY



Plymouth

SPARKSAFE
Electrical Products

COPE
SUPPLY INC.

LINEMASTER®
AMERICA'S FOOT SWITCH LEADER

PLYON®

COZY
PRODUCTS®



picoma®

nsi
INDUSTRIES

CNFIT™

REES

Summit Electric Products Ltd.

3333 Devon Drive, Windsor ON N8X 4L5

Toll Free: 1-800-265-4822

Tel: 1-519-250-8820 Fax: 1-519-250-8389

sales@summit-electric.com

www.summit-electric.com



Summit Electric Products has three separate divisions all rolled into one

Standard Products Division

At Summit Electric, we serve as a Canadian distribution centre for many U.S. manufacturers. In doing so, we provide the customer service, warehousing and logistics for all of our U.S. partners. We pride ourselves in our commitment to maintaining extensive inventory levels and exceptional product knowledge. Many of the products can be found in this booklet

Specialty Imports

Summit Electric specializes in finding hard to get and obsolete electrical items. Often you may find yourself in a situation where you have a requirement from a manufacturer that you have never heard of or are not authorized to purchase from. This is where we can help. We import electrical items from the USA daily. We handle all the incoming freight, duty, brokerage and duty exchange and quote you in NET Canadian dollars. This both frees up your time and lets you know your true landed cost.

New Surplus Inventory Division

Summit Electric has a vast inventory of surplus electrical material from several manufacturers such as Appleton, Burndy, Crouse Hinds, Hubbell, OZ/Gedney and T&B. Our exclusive inventory of surplus material consists of new and left over material from a variety of our trusted partners with many of these items in their original factory packaging.

Also as a Summit Electric Products client, your access to surplus inventory is not limited only to what is in our warehouse. We can also provide access to an abundance of surplus material from the United States as well.

Summit Electric Products Ltd. sells exclusively to wholesale electrical distributors.

**We break Packaging
Same Day Shipments**

Index

Beam Clamps and Hangers	53
Conduit Elbows, Nipples, Couplings	36,58-62,63-64
• Aluminum	60-62
• EMT (elbows)	36
• Rigid	58-60
• Stainless Steel	63-64
Control Switches	21
Dock Loading Lights	27
EMT Fittings	36-39
• Conduit Bodies	37
• Conduit Elbows	36
• Couplings & Connectors	38-39
Raintight	39
Set Screw	38-39
• EMT to Flex Connectors	38
• EMT to Rigid Connectors	38
• Offset Connectors	38
• Pipe Straps	36
• Pull Elbows	38
Explosion Proof Fittings	54
Flexible Conduit & Connectors	57
Foot Switches	23-24
Grounding Clamps & Grounding Lugs	35
Heat Shrink Products	28-29
• Busbar Insulating Tubing	29
• Breakout Boots	28
• End Caps	28
• Heavy Wall Tubing	28
• Teck Cable Splice Kits	28
• Wraparound Cable Support Sleeves	29
Lugs & Sleeves	31-34
• Adapters	33
• Aluminum Compression	32-33
• Copper Compression	31-32
• Mechanical	34
Marathon Special Products	1-20
• Power Blocks	1-15
Bulk Fastening	9
Covers	15
High Voltage	10-11
Miscellaneous Configurations	12
Splicer & Distribution	1-6
Splicer & Distribution (Enclosed)	7-8
Stud Configurations	13-15
• Terminal Blocks	16-20
Dead Front	19
Double Row	20
Heavy Duty	16-18
Radiant Heating Products	27
Retractable Cords	22

Index

Rigid Fittings	40-52
• 3 Piece Couplings	44
• Bushed Nipples	44
• Bushings – Grounding, Malleable Iron, Plastic	41-42
• Compression Couplings & Connectors	47
• Conduit Bodies	50-51
• Device Boxes & Covers	52
• Enlargers	46
• Floor Flanges	46
• Hole Seals & Knock Outs	43
• Hubs	46
• Locknuts – Aluminum, Steel, Sealing	42
• Offset Nipples	43
• O-Rings	43
• Pull Elbows	48
• Reducing Bushings & Washers	48-50
• Service Entrance Heads	44
• Set Screw Couplings & Connectors	47
• Straps & Clamp Backs	45
• Swivel Fixture Hangers	40
Sealtite (Liquid-Tight) Connectors & Conduit	55-56,67
• Connectors	55-56,67
Zinc Die-Cast	55
Malleable Iron	55-56
Stainless Steel	67
• Liquid-Tight Conduit	56
Stainless Steel Products	63-72
• 3 Piece Couplings	66
• Beam Clamps	67
• Bushings	69
• Conduit Bodies	64
• Conduit, Couplings, Nipples, Elbows	63-64
• Conduit Caps	65
• Device Boxes & Covers	66
• Floor Flanges	65
• EYS Fittings	69
• Hangers	67
• Hazardous Location Junction Boxes	69
• Hubs	64
• Locknuts	66
• Pull Elbows	65
• Reducing Bushings	68
• Sealtite (Liquid-Tight) Connectors	67
• Strain Relief Connectors	70
• Strain Relief Grips	70
• Straps & Spacers	65
• Strut & Strut Fittings	71-72
• Threaded Plugs	68
• U-Bolts	71


Index

Standoff Insulators	24
Stop & Go Lights	26
Strain Relief Connectors	40,70
• Stainless Steel	70
• Steel	40
Strut Fittings	73-78
• Angle Fittings	73-74
• Beam Clamps	75
• Brackets	76
• Clamping Nuts	73
• Flat Fittings	73
• Miscellaneous Fittings	76
• P Straps	78
• Pipe Straps	77
• Post Bases	74
• Trolleys	76
• U Bolts	73
• U Supports, Z Fittings & Joiners	74
Tape	25-26
• Arc & Fireproofing	26
• Dacron Glass (Varnished)	26
• Filler	26
• Friction	25
• Glass Cloth	26
• High Voltage	25
• Rubber	25
• Shielding	26
• Silicone	26
• Tinned Copper Shielding Braid	25
• Tinned Copper Shielding Tape	25
• Underground Marking	26
• Vinyl	25
Thread Adapters – Metric to NPT and PG to NPT	35
Toggle Switches	30
Wire Mesh Grips	29-30,70
• Pulling	30
• Strain Relief	29
• Strain Relief - Stainless Steel	70
• Support	29
• Support - Stainless Steel	30,70
Numerical Index	79-84

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Electrical

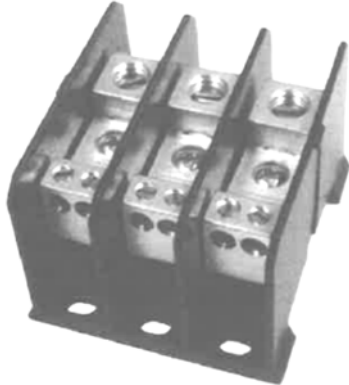

- 60 - 2280 amps
- 600 volts AC/DC (UL)
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details
- Listed products provide feeder circuit terminal spacing

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - o Thermoplastic: 125°C (257°F) - UL RTI
 - o Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL listed - or - UL recognized
 - o Listed file no. QPQS.E309401 (UL 1953)
 - o Recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)



Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
60	1/2/3/4	141x403	Plastic	AL	#2 - #14	1		#10 - #18	2	
115	1/2/3/4	141x300	Plastic	AL	#2 - #14	1		#2 - #14	1	
	1/2/3	142x552	Phenolic	AL	#2 - #14	1		#2 - #14	1	
	1/2/3/4	141x400	Plastic	AL	#2 - #14	1		#10 - #18	4	
150	1/2/3	142x121	Phenolic	CU	1/0 - #14	1		1/0 - #14	1	
175	0/1/2/3	132x572CH	Plastic	AL	2/0 - #14	1		2/0 - #14	1	
	1/2/3	142x572	Phenolic	AL	2/0 - #14	1		2/0 - #14	1	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (X) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
175	1/2/3	132x972CH	Plastic	CU	2/0 - #14	1		2/0 - #14	1	
	0/1/2/3	132x570CH	Plastic	AL	2/0 - #14	1		#4 - #14	4	
	1/2/3	142x570	Phenolic	AL	2/0 - #14	1		#4 - #14	4	
	0/1/2/3	132x580CH	Plastic	AL	2/0 - #14	1		#4 - #14	6	
	2/3	140x402	Phenolic	AL	2/0 - #14	1		#4 - #14	4	
	2/3	140x401	Phenolic	AL	2/0 - #14	1		#4 - #14	6	
	0/1/2/3	132x970CH	Plastic	CU	2/0 - #14	1		#4 - #14	4	
	1/2/3	142x970	Phenolic	CU	2/0 - #14	1		#4 - #14	4	
	3	1343580	Plastic	AL	2/0 - #14	1		#4 - #14	6	
200	3	1343570	Plastic	AL	3/0 - #14	1		#2 - #14	4	
	3	1343572	Plastic	AL	3/0 - #14	1		3/0 - #14	1	
	3	1343548	Plastic	AL	3/0 - #14	1		#6 - #14 #2 - #14	6 2	
255	1/2/3	143x124	Phenolic	CU	250 - #6	1		250 - #6	1	
	1/2/3	143x123	Phenolic	AL	250 - #6	1		250 - #6	1	
	2/3	140x801	Phenolic	CU	250 - #6	1		250 - #6	1	
310	2/3	140x303	Phenolic	AL	350 - #6	1		350 - #6	1	
	1/2/3	143x126	Plastic	AL	350 - #6	1		350 - #6	1	
	1/2/3	133x126CH	Plastic	AL	350 - #6	1		350 - #6	1	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
310	3	1343582	Plastic	AL	350 - #6	1		350 - #6	1	
	2/3	140x404	Phenolic	AL	350 - #6	1		#4 - #14	6	
	1/2/3	133x554CH	Plastic	AL	350 - #6	1		2/0 - #14	2	
	2/3	140x410	Phenolic	AL	350 - #6	1		2/0 - #14	2	
	1/2/3	143x554	Phenolic	AL	350 - #6	1		2/0 - #14	2	
	1/2/3	133x324CH	Plastic	AL	350 - #6	1		#8 - #14	24	
335	1/2/3	144x401	Phenolic	AL	400 - #6	1		#2 - #14	6	
	1/2/3	143x552	Phenolic	AL	400 - #6	1		#2 - #14	4	
	1/2/3	143x553	Phenolic	AL	400 - #6	1		#2 - #14	6	
	3	1343553	Plastic	AL	400 - #6	1		#2 - #14	6	
	1/2/3	144x560	Phenolic	AL	400 - #6	1		#2 - #14	8	
	1/2/3	133x552CH	Plastic	AL	400 - #6	1		#2 - #14	4	
350	1/2/3	133x305CH	Plastic	AL	2/0 - #14	2		2/0 - #14	2	
	1/2/3	143x306	Phenolic	AL	2/0 - #14	2		2/0 - #14	2	
	1/2/3	143x555	Phenolic	AL	2/0 - #14	2		#4 - #14	6	
	1/2/3	133x555CH	Plastic	AL	2/0 - #14	2		#4 - #14	6	
	3	1343555	Plastic	AL	2/0-#14	2		#4 - #14	6	
	1/2/3	143x955	Phenolic	CU	2/0 - #14	2		#4 - #14	6	









Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (X) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
350	1/2/3	133x955CH	Plastic	CU	2/0 - #14	2		#4 - #14	6	
380	1/2/3	143x953	Phenolic	CU	500 - #4	1		#2 - #14	6	
	1/2/3	133x953CH	Plastic	CU	500 - #4	1		#2 - #14	6	
	1/2/3	144x551	Phenolic	AL	500 - #4	1		#2 - #14	6	
	1/2/3	145x579	Phenolic	AL	500 - #4	1		2/0 - #14	6	
380	1/2/3	133x587CH	Plastic	AL	500 - #4	1		#2 - #14 350 - #6	3 1	
	1/2/3	143x587	Phenolic	AL	500 - #4	1		#2 - #14 350 - #6	3 1	
	1/2/3	145x594	Phenolic	AL	500 - #4	1		#2 - #14	8	
	1/2/3	145x552	Phenolic	AL	500 - #4	1		#2 - #14	12	
420	1/2/3	144x557	Phenolic	AL	600 - #4	1		600 - #4	1	
	1/2/3	133x360CH	Plastic	AL	600 - #2	1		600 - #2	1	
	1/2/3	133x588CH	Plastic	AL	600 - #2	1		#2 - #14 1/0 - #14	6 3	
	3	1343588	Plastic	AL	600 - #2	1		#2 - #14 1/0 - #14	6 3	
	1/2/3	133x595CH	Plastic	AL	600 - #2	1		#4 - #14	12	
	3	1343595	Plastic	AL	600 - #2	1		#4 - #14	12	
	1/2/3	133x585CH	Plastic	AL	600 - #2	1		#2 - #14	8	
	3	1343585	Plastic	AL	600 - #2	1		#2 - #14	8	
	1/2/3	133x575CH	Plastic	AL	600 - #2	1		2/0 - #14	4	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
420	1/2/3	133x565CH	Plastic	AL	600 - #2	1		250 - #6	2	
	1/2/3	135x601CH	Plastic	AL	600 - #2	1		#6 - #14	24	
475	1/2/3	135x701CH	Plastic	AL	750 - 1/0	1		750 - 1/0	1	
510	1/2/3	133x320CH	Plastic	AL	250 - 1/0	2		250 - 1/0	2	
	1/2/3	133x596CH	Plastic	AL	250 - 1/0	2		#4 - #14	12	
	3	1343596	Plastic	AL	250 - 1/0	2		#4 - #14	12	
	1/2/3	133x597CH	Plastic	AL	250 - 1/0	2		#2 - #14	8	
	3	1343597	Plastic	AL	250 - 1/0	2		#2 - #14	8	
	1/2/3	133x598CH	Plastic	AL	250 - 1/0	2		2/0 - #14	4	
620	1/2/3	145x129	Phenolic	AL	350 - #4	2		350 - #4	2	
	1	1331348CH	Plastic	AL	350 - #4	2		#8 - #14	48	
760	1/2/3	145x301	Phenolic	AL	500 - #4	2		500 - #4	2	
	1/2/3	145x592	Phenolic	AL	500 - #4	2		#4 - #14	12	
	1/2/3	145x586	Phenolic	AL	500 - #6	2		2/0 - #14	8	
	1/2/3	145x992	Phenolic	CU	500 - #4	2		#2 - #14	12	
	1/2/3	145x986	Phenolic	CU	500 - #4	2		2/0 - #14	8	
	1/2/3	145x408	Phenolic	AL	500 - #6	2		#2 - #14	12	
840	1/2/3	145x411	Phenolic	AL	600 - #2	2		3/0 - #6 #4 - #14	4 4	

Power Blocks - Marathon Special Products

Splicer & Distribution NEMA Power Blocks

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
950	1/2/3	135x605CH * see note below	Plastic	AL	600 - #2	2		350 - #4	4	
	1/2/3	135x702CH * see note below	Plastic	AL	750 - 1/0	2		750 - 1/0	2	
	1/2/3	135x703CH * see note below	Plastic	AL	750 - 1/0	2		250 - #6	6	
	1/2/3	135x704CH * see note below	Plastic	AL	750 - 1/0	2		2/0 - #14	10	
	1/2/3	135x705CH * see note below	Plastic	AL	750 - 1/0	2		#2 - #14 250 - #6	12 3	
	1/2/3	135x706CH * see note below	Plastic	AL	750 - 1/0	2		#2 - #14 250 - #6	4 5	
	1/2/3	135x707CH * see note below	Plastic	AL	750 - 100	2		#2 - #14 3/0 - #6	12 4	
	1/2/3	135x708CH * see note below	Plastic	AL	750 - 1/0	2		3/0 - #6	8	
2280	1	1453401 ** see note below	Phenolic	AL	500 - #4	6		2/0 - #14	18	

*UL Recognized to US and Canadian Standards (cULus).

**Special 1 Pole Power Block with the Dimensions of a 3 Pole 145 Series Power Block

Power Blocks - Marathon Special Products

Splicer & Distribution - Enclosed Power Blocks (EPB)



Electrical

- 115 - 760 amps
- 600 volts AC/DC (UL)
- Up to 1000 volts (IEC) - reference data sheets
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details
- Listed products provide feeder circuit terminal spacing

Mechanical

- Insulator - thermoplastic: 125°C (257°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable and/or DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL listed - or - UL recognized
 - o Listed file no. QPQS.E309401 (UL 1953)
 - o Recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- IEC 60529, IP-20
- RoHS compliant (all)

Amps	Catalog Number	Mounting Style	Max SCCR	Conn. Material	Line Side			Load Side		
					Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
115	EPBAD21	Both DIN & Panel	100,000	AL	#2 - #14	1		#2 - #14	1	
	EPBAD24	Both DIN & Panel	65,000	AL	#2 - #14	1		#10 - #18	4	
200	EPBAD42	DIN	100,000	AL	3/0 - #14	1		3/0 - #14	1	
	EPBAP42	Panel								
	EPBCD42	DIN	100,000	CU						
	EPBCP42	Panel								

Power Blocks - Marathon Special Products

Splicer & Distribution - Enclosed Power Blocks (EPB)

Amps	Catalog Number	Mounting Style	Max SCCR	Conn. Material	Line Side			Load Side					
					Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole				
200	EPBAD45	DIN	100,000	AL	3/0 - #14	1		#2 - #14	4				
	EPBAP45	Panel											
	EPBCD45	DIN	100,100	CU									
	EPBCP45	Panel											
	EPBAP48	Panel	100,000	AL				#6 - #14 #2 - #14	6 2				
	EPBAD48	Din	100,000	AL									
335	EPBAD74	DIN	10,000	AL	400 - #6 2/0 - #14	1 1		#2 - #14	8				
	EPBAP74	Panel	100,000										
	EPBCD74	DIN	10,000	CU									
	EPBCP74	Panel	100,000										
510	EPBAD71	DIN	10,000	AL	250 - #6	2		250 - #6	2				
	EPBAP71	Panel	100,000										
	EPBCD71	DIN	10,000	CU									
	EPBCP71	Panel	100,000										
760	EPBAP81	Panel	100,000	AL	500 - #4	2		500 - #4	2				
	EPBAP84			CU				2/0 - #14	8				
	EPBCP84												
	EPBAP86			AL				#4 - #14	12				

Power Blocks - Marathon Special Products

Bulk Fastening Power Blocks (BFPB)

Electrical

- 1605 amps
- 1000 volts AC/DC (cULus)
- Multiple wire rating - refer to data sheets for details
- Provides feeder circuit terminal spacing

Mechanical

- Insulator - thermoplastic: 125°C (257°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable

Features / Benefits

- Modular construction to accommodate numerous terminal options
- Available for 2 to 6 stud terminal positions
- Accommodates power distribution options for listed lugs sized up to 1000kcmil
- First power terminal block to have a high SCCR rating (35k) with no over current protection device
- Reliably terminates flexible stranded classes of wire with crimp lugs
- Suitable to terminate and distribute power with flexible bus bar

Standards

- UL recognized file no. XCFR2.E62806 (UL 1059)
- cUR recognized file no. XCFR8.E62806 (UL 1059)
- RoHS compliant (all)



Catalog Number	Stud Positions	Stud Size	Cover Part Number
BFPB-50-2-2	2	1/2"	CC-BFPB-2-2
BFPB-50-2-3	3		CC-BFPB-2-3
BFPB-50-2-4	4		CC-BFPB-2-4
BFPB-50-2-5	5		CC-BFPB-2-5
BFPB-50-2-6	6		CC-BFPB-2-6
BFPB-37-1-3	3	3/8"	CC-BFPB-1-3
BFPB-37-1-4	4		CC-BFPB-1-4
BFPB-37-1-5	5		CC-BFPB-1-5
BFPB-37-1-6	6		CC-BFPB-1-6

Power Blocks - Marathon Special Products

High Voltage Power Blocks (HVPB)



Electrical

- 350 - 950 amps
- 1500 volts AC/DC (UL)
- Provides feeder circuit terminal spacing at 600V
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, thermoplastic
- Insulator temp-rating: 110°C (230°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable
- Modular construction for multi-pole configurations

Standards

- See datasheets for product specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- cUR recognized file no. XCFR8.E62806 (UL 1059)
- RoHS compliant



Amps	Catalog Number	Conn. Temp Rating	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
350	HVPB105	90°C	Plastic	AL	Stud, M10	1		#10 - #14 (a)	24	
420	HVPB108	75°C	Plastic	AL	600 - #2	1		#4 - #14	12	
	HVPB109	75°C	Plastic	AL	600 - #2	1		600 - #2	1	
430	HVPB101	90°C	Plastic	AL	Stud, M10	1		#6 - #14 (b)	12	
	HVPB103	90°C	Plastic	AL	Stud, M10	1		#4 - #14 (c)	8	





(a) suitable for #8 AWG, limited to 40A per wire, copper only

(b) suitable for #4 AWG, limited to 75A per wire, copper only

(c) suitable for #2 AWG, limited to 95A per wire, copper. 75A per wire, aluminum

Power Blocks - Marathon Special Products

High Voltage Power Blocks (HVPB)


Amps	Catalog Number	Conn. Temp Rating	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
430	HVPB107	90°C	Plastic	CU	Stud, M10	1		Stud, M10	1	
	HVPB208	90°C	Plastic	CU	Stud, 1/2-13 x 1.44	1		Stud, 1/2-13 x 1.44	1	
750	HVPB112	90°C	Plastic	CU	Stud, 3/8"	1		Stud, 3/8"	1	
	HVPB114	90°C	Plastic	CU	Stud, 1/2"	1		Stud, 1/2"	1	
760	HVPB210	75°C	Plastic	AL	500 - #4	2		#2 - #14	12	
	HVPB211	75°C	Plastic	AL	500 - #4	2		2/0 - #14	8	
860	HVPB205	90°C	Plastic	AL	Stud, M10	1		#4 - #14 (c)	16	
	HVPB207	90°C	Plastic	AL	Stud, M10	2		#4 - #14 (c)	16	
	HVPB201	90°C	Plastic	AL	Stud, M10	1		#6 - #14 (b)	24	
	HVPB203	90°C	Plastic	AL	Stud, M10	2		#6 - #14 (b)	24	
950	HVPB602	90°C	Plastic	AL	600 - #2	2		600 - #2	2	
1500	HVPB212	90°C	Plastic	CU	Stud, 3/8"	2		Stud, 3/8"	2	
	HVPB214	90°C	Plastic	CU	Stud, 1/2"	2		Stud, 1/2"	2	

(a) suitable for #8 AWG, limited to 40A per wire, copper only

(b) suitable for #4 AWG, limited to 75A per wire, copper only

(c) suitable for #2 AWG, limited to 95A per wire, copper. 75A per wire, aluminum

CH1331	Snap-on Cover for HVPB1 Series
CH1332	Snap-on Cover for HVPB2 Series



Power Blocks - Marathon Special Products

Power Blocks - Miscellaneous Configurations



Electrical

- 115 - 200 amps
- 600 volts AC/DC (cULus)
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - Thermoplastic: 125°C (257°F) - UL RTI
 - Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)

Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil		Connector Openings/Pole	Wire Range AWG/kcmil	Connector Openings/Pole	
115	1/2/3/4	141x201	Plastic	AL	#2 - #14	1		#10-32 Tapped Hole	1	
	1/2/3/4	141x202	Plastic	AL	#2 - #14	1		1/4 Quick Connects	4	
	1/2/3/4	141x205	Plastic	AL	#2 - #14	1		1/4 Quick Connects & #10-32 Tap	2/1	
	1/2/3/4	141x301	Plastic	AL	#2 - #14	1		#2 - #14 & 1/4 Quick Connects	1/1	
175	1/2/3	142x553	Phenolic	AL	2/0 - #14	1		1/4-20 Tapped Hole	1	
	1/2/3	132x579CH	Plastic	AL	2/0 - #14	1		#2 - #14 & 1/4 Quick Connect	1/1	
	1/2/3	132x670CH	Plastic	AL	2/0-#14	1		#4 - #14 & 1/4 Quick Connect	4/1	
200	1/2/3	142x123	Phenolic	CU	1/4-20 Screw	1		1/4-20 Screw	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations



Electrical

- 115 - 1680 amps
- 600 volts AC/DC (UL)
- Flexible stranded wire compliant
- Multiple wire rating - refer to data sheets for details

Mechanical

- Base, black thermoplastic or phenolic (see chart)
- Insulator temp-ratings
 - Thermoplastic: 125°C (257°F) - UL RTI
 - Phenolic: 150°C (302°F) - UL RTI
- Flammability, UL 94 V-0
- Mounting: panel mountable, 132 series is also DIN mountable

Standards

- See datasheets for product specific approvals listed
- UL recognized file no. XCFR2.E62806 (UL 1059)
- CSA certified file no. LR19766 (CSA C22-2 No. 158)
- CE (Component IEC 60947-7-1)
- RoHS compliant (all)

Covers available – see page 15

Blocks with “CH” suffix are complete with removable hinged cover

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
115	1/2/3/4	141x203	Plastic	AL	#2 - #14	1		#10-32 x .60	1	
175	0/1/2/3	132x574CH	Plastic	AL	2/0 - #14	1		1/4-20 x .50	1	
	0/1/2/3	132x474CH	Plastic	AL	2/0 - #14	1		M6 x 13	1	
	1/2/3	142x574	Phenolic	AL	2/0 - #14	1		1/4-20 x .50	1	
	1/2/3	143x590	Phenolic	AL	2/0 - #14	1		1/4-20 x 1.38	1	
200	0/1/2/3	132x122CH	Plastic	CU	1/4-20 x .56	1		1/4-20 x .56	1	
	0/1/2/3	132x422CH	Plastic	CU	M6 x 15	1		M6 x 15	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
200	1/2/3	142x122	Phenolic	CU	1/4-20 x .56	1		1/4-20 x .56	1	
230	1/2/3	143x563	Phenolic	CU	3/8-16 x 1.18	1		3/8-16 x 1.18	1	
	1/2/3	143x561	Phenolic	CU	3/8-16 x 1.18	1		1/4-20 x 1.38	1	
	1/2/3	144x553	Phenolic	CU	3/8-16 x 1.44	1		3/8-16 x 1.44	1	
260	1/2/3	144x122	Phenolic	CU	3/8-16 x 1.44	1		1/4-20 x .56	2	
310	1/2/3	133x564CH	Plastic	CU	M10 x 30	1		M10 x 30	1	
	1/2/3	133x563CH	Plastic	CU	3/8-16 x 1.18	1		3/8-16 x 1.18	1	
	1/2/3	143x559	Phenolic	AL	350 - #6	1		3/8-16 x 1.13	1	
	1/2/3	133x559CH	Plastic	AL	350 - #6	1		3/8-16 x 1.25	1	
	1/2/3	133x558CH	Plastic	AL	350 - #6	1		M10 x 30	1	
360	1/2/3	145x573	Phenolic	CU	3/8-16 x 1.44	1		3/8-16 x 1.44	2	
	1/2/3	145x583	Phenolic	CU	3/8-16 x 1.44	1		1/4-20 x 1.44	2	
380	1/2/3	144x569	Phenolic	AL	500 - #4	1		1/4-20 x 1.06	2	
	1/2/3	144x575	Phenolic	AL	500 - #4	1		3/8-16 x 1.31	1	
410	1/2/3	145x606	Phenolic	CU	1/2-13 x 1.44	1		1/2-13 x 1.44	1	
	1/2/3	133x611CH	Plastic	CU	1/2-13 x 1.38	1		1/2-13 x 1.38	1	

Power Blocks - Marathon Special Products

Power Blocks - Stud Configurations

Amps	Poles (X)	Catalog # Substitute (x) for # of poles	Material		Line Side			Load Side		
			Insulator	Conn.	Wire Range AWG/kcmil	Connector Openings/Pole		Wire Range AWG/kcmil	Connector Openings/Pole	
475	1/2/3	145x613	Phenolic	CU	3/8-16 x 1.44	2		3/8-16 x 1.44	1	
510	1/2/3	133x272CH	Plastic	AL	3/8-16 x 1.19	1		#4 - #14	12	
	1/2/3	133x280CH	Plastic	AL	3/8-16 x 1.19	1		#2 - #14	8	
	1/2/3	133x270CH	Plastic	AL	3/8-16 x 1.19	1		2/0 - #14	4	
760	1/2/3	145x282	Phenolic	AL	3/8-16 x 1.00	2		2/0 - #14	8	
	1/2/3	145x599	Phenolic	AL	500 - #4	2		3/8-16 x 1.31	2	
	1/2/3	145x610	Phenolic	AL	500 - #4	2		1/2-13 x 1.31	1	
840	1/2/3	144x614	Phenolic	CU	3/8-16 x 1.00	1		3/8-16 x 1.00	1	
1680	1/2/3	145x615	Phenolic	AL	600 - #4	4		1/2-13 x 1.56	1	

Power Block Covers

Series	Type	Catalog # Substitute (X) for # of poles	Poles	Figure #
132	SNAP-ON	CH132x	1/2/3	3
133	SNAP-ON	CH133x	1/2/3	3
134	SNAP-ON	CH1343	3	4
135	SNAP-ON	CH1351	1	5
140	SCREW-ON	CC140x	2/3	1

Series	Type	Catalog # Substitute (X) for # of poles	Poles	Figure #
141	SNAP-ON	CC141x	1/2/3/4	2
142	SCREW-ON	CC142x	1/2/3	1
143	SCREW-ON	CC143x	1/2/3	1
144	SCREW-ON	CC144x	1/2/3	1
145	SCREW-ON	CC145x	1/2/3	1




FIGURE 1




FIGURE 2




FIGURE 3




FIGURE 4




FIGURE 5

Heavy Duty Terminal Blocks - Marathon Special Products

1500 Series (Barrier Type) – 5/8" line-to-line spacing









Specifications

- 75 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 5/8" (.625") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .50"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

						
Poles	Standard connector with serrations for anti-rotation	Removable connector with brass insert	10-32 stud, removable connector	Short circuit bar with brass insert, 4 shorting pins per block	Standard connector with hinge cover	Multiple circuit jumper
2	1502STD	1502DJ	1502ST	1502SC	1502H	1502MCJ
4	1504STD	1504DJ	1504ST	1504SC	1504H	1504MCJ
6	1506STD	1506DJ	1506ST	1506SC	1506H	1506MCJ
8	1508STD	1508DJ	1508ST	1508SC	1508H	1508MCJ
12	1512STD	1512DJ	1512ST	1512SC	1512H	1512MCJ

Clear Cover Catalog # Substitute (xx) for # of poles	White Cover Catalog # Substitute (xx) for # of poles
CC15xx	CW15xx

Heavy Duty Terminal Blocks - Marathon Special Products

1600 Series (Barrier Type) – 21/32" line-to-line spacing









Specifications

- 75 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 21/32" (.656") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .50"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

						
Poles	Standard connector with serrations for anti-rotation	Removable connector with brass insert	10-32 stud, removable connector	Short circuit bar with brass insert, 4 shorting pins per block	Standard connector with hinge cover	Multiple circuit jumper
2	1602STD	1602DJ	1602ST	1602SC	1602H	1602MCJ
4	1604STD	1604DJ	1604ST	1604SC	1604H	1604MCJ
6	1606STD	1606DJ	1606ST	1606SC	1606H	1606MCJ
8	1608STD	1608DJ	1608ST	1608SC	1608H	1608MCJ
12	1612STD	1612DJ	1612ST	1612SC	1612H	1612MCJ

Clear Cover Catalog # Substitute (xx) for # of poles	White Cover Catalog # Substitute (xx) for # of poles
CC16xx	CW16xx

Heavy Duty Terminal Blocks - Marathon Special Products

1700 Series (Barrier Type) – 5/8" line-to-line spacing







Specifications

- 75 amps
- 600 volts AC/DC
- Base, plastic, 125°C (UL RTI)
- Screws, #10-32 phil-slot, brass, nickel plated
- Connector, brass, nickel plated
- 5/8" (.625") line-to-line spacing
- Bare wire range #10-22 AWG CU
- Accepts lugs w/max width of .54"

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

		
Poles	Standard connector with serrations for anti-rotation	Short circuit bar with brass insert, 4 shorting pins per block
2	1702STD	1702SC
3	1703STD	1703SC
4	1704STD	1704SC
5	1705STD	1705SC
6	1706STD	1706SC
7	1707STD	1707SC

		
Poles	Standard connector with serrations for anti-rotation	Short circuit bar with brass insert, 4 shorting pins per block
8	1708STD	1708SC
9	1709STD	1709SC
10	1710STD	1710SC
11	1711STD	1711SC
12	1712STD	1712SC

Clear Cover
Catalog #
Substitute (xx)
for # of poles
CC17xx

Dead Front Terminal Blocks - Marathon Special Products

885 RZ Series



Specifications

- 85 amps
- 600 volts AC/DC
- Base, thermoplastic, 130°C (UL RTI)
- Available in 1 to 12 terminal positions
- UL and cUL recognized component
- .432" centerline spacing
- 16 in lbs force
- Numbered terminal positions
- Accommodates conductor sizes #4 - #18 AWG

985 GP Series



Specifications

- 85 amps
- 600 volts AC/DC
- Base, phenolic, 150°C (UL RTI)
- Screws, steel, tin plated
- Connector, aluminum, tin plated
- Wire Range:
 - o (1) #4 - #18 AWG
 - o (1-2) #8 AWG
 - o (1-4) #10-12 AWG
 - o (1-6) #14-16 AWG
 - o (1-8) #18
- .625" centerline spacing

Standards

- UL recognized file no. XCFR2.E62806
- CSA certified file no. LR19766
- CE (Component IEC 60947-7-1)
- RoHS compliant

Poles	Catalog Number	
	885 RZ Series	985 GP Series
1	885RZ01	985GP01
2	885RZ02	985GP02
3	885RZ03	985GP03
4	885RZ04	985GP04
5	885RZ05	985GP05
6	885RZ06	985GP06
7	885RZ07	985GP07
8	885RZ08	985GP08
9	885RZ09	985GP09
10	885RZ10	985GP10
11	885RZ11	985GP11
12	885RZ12	985GP12

Double Row Terminal Blocks - Marathon Special Products

670A RZ Series



Specifications

- 20 amps
- 150V Class C, 300V Class B
- Base, thermoplastic 130°C
- Screws, steel, #6-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-30 poles at 3/8" centres
- Accepts lugs with max width of .31"
- Bare Wire Range #12- #22 AWG

671 RZ Series



Specifications

- 30 amps
- 150V Class C, 300V Class B
- Base, thermoplastic 125°C
- Screws, steel, #6-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-30 poles at 7/16" centres
- Accepts lugs with max width of .33"
- Bare Wire Range #14 - #22 AWG

672 RZ Series



Specifications

- 30 amps
- 600V Class B/C
- Base, thermoplastic 125°C
- Screws, steel, #8-32 phil-slot
- Terminals, plated brass
- Closed back
- 1-24 poles at 9/16" centres
- Accepts lugs with max width of .41"
- Bare Wire Range #12 - #14 AWG

Poles	Catalog Number		
	670A RZ Series	671 RZ Series	672 RZ Series
1	670ARZ01	671RZ01	672RZ01
2	670ARZ02	671RZ02	672RZ02
3	670ARZ03	671RZ03	672RZ03
4	670ARZ04	671RZ04	672RZ04
5	670ARZ05	671RZ05	672RZ05
6	670ARZ06	671RZ06	672RZ06
7	670ARZ07	671RZ07	672RZ07
8	670ARZ08	671RZ08	672RZ08
9	670ARZ09	671RZ09	672RZ09
10	670ARZ10	671RZ10	672RZ10
11	670ARZ11	671RZ11	672RZ11
12	670ARZ12	671RZ12	672RZ12
13	670ARZ13	671RZ13	672RZ13
14	670ARZ14	671RZ14	672RZ14
15	670ARZ15	671RZ15	672RZ15
16	670ARZ16	671RZ16	672RZ16
17	670ARZ17	671RZ17	672RZ17
18	670ARZ18	671RZ18	672RZ18
19	670ARZ19	671RZ19	672RZ19
20	670ARZ20	671RZ20	672RZ20
21	670ARZ21	671RZ21	672RZ21
22	670ARZ22	671RZ22	672RZ22
23	670ARZ23	671RZ23	672RZ23
24	670ARZ24	671RZ24	672RZ24
25	670ARZ25	671RZ25	-
26	670ARZ26	671RZ26	-
27	670ARZ27	671RZ27	-
28	670ARZ28	671RZ28	-
29	670ARZ29	671RZ29	-
30	670ARZ30	671RZ30	-

Control Switches

REES Inc. A leader in the design of control switches for over 80 years

Push Buttons

Single Plunger

- A broad selection of contact arrangements
- Heavy Duty rated
- Variety of lockable devices
- Available styles:
 - o Momentary, Maintained and Latching
 - o Keylock
 - o Emergency Stop
 - o Weatherproof

Double Plunger

- A broad selection of contact arrangements
- Heavy Duty rated
- Variety of lockable devices

30.5mm Control Units

- 4 styles of push button operators
- 3 styles of 2,3 and 4 position selector operators
- 4 styles of push-pull units
- Illuminated push buttons
- Variety of lockable devices
- All meet NEMA12/13 requirements when properly installed in an appropriate enclosure
- Variety of different cams to customize any installation



Many Styles of Buttons and Contact Arrangements Available – Please Call

Pull to Stop

Cable Operated Switches

- Taut and slack cable styles for Emergency Stop applications as well as ordinary circuit control

Rope Operated Switches

- Spring loaded Rope Operated Sequence Switch alternates between NC and NC states with a pull of the rope



Many Single and Double Arm Cable/Rope Switches Available – Please Call

Retractable Cords

TPR POWER CORDS

Catalog Number	Retracted Length	Number of Conductors	Type	Maximum Voltage	Temperature (°C)	Cable OD (inches)
18 AWG						
72180	12, 24, 36, 48	2	SVEO/SVTO	300	105°	.242
72181	12, 24, 36, 48	2	SJEOW/SJT	300	105°	.300
73181	12, 24, 36, 48	3	SJEOW/SJT	300	105°	.308
74181	12, 24, 36, 48	4	SJEOW/SJT	300	105°	.340
75181	12, 24, 36, 48	5	SJEOW/SJT	300	105°	.385
77182	12, 24, 36, 48	7	SEOW/STO	600	105°	.500
710182	12, 24, 36, 48	10	SEOW/STO	600	105°	.590
16 AWG						
73161	12, 24, 36, 48	3	SJEOW/SJT	300	105°	.340
74161	12, 24, 36, 48	4	SJEOW/SJT	300	105°	.365
74162	12, 24, 36, 48	4	SEOW/STO	600	105°	.425
76162	12, 24, 36, 48	6	SEOW/STO	600	105°	.530
78162	12, 24, 36, 48	8	SEOW/STO	600	105°	.570
14 AWG						
73142	12, 24, 36, 48	3	SEOW/STO	600	105°	.540
74142	12, 24, 36, 48	4	SEOW/STO	600	105°	.570
12 AWG						
73122	12, 24, 36, 48	3	SEOW/STO	600	105°	.580
74122	12, 24, 36, 48	4	SEOW/STO	600	105°	.660

Soft, Bare Copper, TPR Insulated

TPR, Black Jacket

PVC POWER CORDS

Catalog Number	Retracted Length	Number of Conductors	Type	Maximum Voltage	Temperature (°C)	Cable OD (inches)
18 AWG						
92180	12, 24, 36, 48	2	SVT	300	105°	.250
93180	12, 24, 36, 48	3	SVT	300	105°	.260
92181	12, 24, 26, 48	2	SJT	300	105°	.295
93181	12, 24, 36, 48	3	SJT	300	105°	.330
94181	12, 24, 36, 48	4	SJT	300	105°	.360
95181	12, 24, 36, 48	5	SJT	300	105°	.440
16 AWG						
92161	12, 24, 36, 48	2	SJT	300	105°	.315
93161	12, 24, 36, 48	3	SJT	300	105°	.355
94161	12, 24, 36, 48	4	SJT	300	105°	.410
14 AWG						
93141	12, 24, 36, 48	3	SJT	300	105°	.390
12 AWG						
93121	12, 24, 36, 48	3	SJT	300	105°	.435

Soft, Bare Copper, PVC Insulated

PVC, Black Jacket (available in white)

LENGTH CHART (1:5 Extension Ratio)

Retracted Length	Extended Length	Tangent Length Both Ends
12 inches	5 feet	12 inches
24 inches	10 feet	6 inches
36 inches	15 feet	6 inches
48 inches	20 feet	6 inches



Many Other Cords Available. Please Call.

Foot Switches – Linemaster

Clipper (Cast Iron)

20A @ 125-250 VAC / 1 H.P. @ 125-250 VAC

	Type	Function	
632S	Single Pedal	Momentary	SPDT
TWIN632S	Double Pedal	Momentary	SPDT
642S	Single Pedal - Wide Treadle	Momentary	SPDT
632DA	Single Pedal	Maintained	SPDT



Clipper

15A @ 125 VAC / 3/4 H.P. @ 125VAC

	Type	Function	
635S	Single Pedal	Momentary	DPDT
TWIN635S	Double Pedal	Momentary	DPDT
632SC3*	Single Pedal	Momentary	SPST
632DC3A*	Single Pedal	Maintained	SPST

*Supplied with 8 ft. 14/3 Cord and 3 prong series plug. Wired N.O.



Clipper TWIN

Dolphin (Plastic)

3A @ 125 VAC

	Type	Function	
D41SN028*	Single Pedal	Momentary	SPST

*Supplied with 8 ft. 18/2 Cord without Plug, Wired N.O.



Dolphin

Treadlite II (Steel)

15A @ 125-250 VAC / 1/2 H.P. @ 125-250 VAC

	Type	Function	
T91S	Single Pedal	Momentary	SPDT
T91SC36*	Single Pedal	Momentary	SPDT

*Supplied with 6 ft. 18/3 Cord without Plug, Wired N.O.



Treadlite II

Optional Steel Guards for Above Switches

	Type
522B14	Single Guard - Standard
522F28	Single Guard - Oversized
522B12	Double Guard - Standard
522D28	Double Guard - Oversized



Guard

Foot Switches – Linemaster

Hercules (Cast Iron)

20A @ 125-250 VAC / 1 H.P. @ 125-250VAC

	Type	Function	
531SWH	Full Shield	Momentary	SPDT
531SWHO	Oversized Shield	Momentary	SPDT
531SWHOX	Extra Oversized Shield	Momentary	SPDT
531SWN	No Shield	Momentary	SPDT
532SWH	Full Shield	Momentary	DPDT
532SWHO	Oversized Shield	Momentary	DPDT
532SWHOX	Extra Oversized Shield	Momentary	DPDT
532SWN	No Shield	Momentary	DPDT
571DWH	Full Shield	Maintained	SPDT
571DWHO	Oversized Shield	Maintained	SPDT
571DWHOX	Extra Oversized Shield	Maintained	SPDT
571DWN	No Shield	Maintained	SPDT
572DWH	Full Shield	Maintained	DPDT
572DWHO	Oversized Shield	Maintained	DPDT
572DWHOX	Extra Oversized Shield	Maintained	DPDT
572DWN	No Shield	Maintained	DPDT



Hercules - Full Shield



Hercules - No Shield

Hercules - Anti Trip (Cast Iron)

20A @ 125-250VAC / 1 H.P. @ 125-250VAC

	Type	Function	
511B	Full Shield	Momentary	SPDT
511BO	Oversized Shield	Momentary	SPDT
511BOX	Extra Oversized Shield	Momentary	SPDT
511BG	Full Shield with Gate	Momentary	SPDT



Full Shield

Hercules Potentiometer (Cast Iron)

	Type	Function
500H	Full Shield	Momentary
500AH	Full Shield with Auxiliary Contact	Momentary
500N	No Shield	Momentary
500AN	No Shield with Auxiliary Contact	Momentary

Maximum Resistance Must Be Specified When Ordering

Many Other Foot Switches Available – Please Call

Standoff Insulators

	Size	Std. Pkg.
559600	1" High - 1/4" 20 Thread (Black)	1
559620	1-1/4" High - 1/4" x 20 Thread (Black)	1
2015-3A	1-1/2" High - 3/8" x 16 Thread (Red)	1
2015-3B	1-3/4" High - 3/8" x 16 Thread (Red)	1
2015-3C	2" High - 3/8" x 16 Thread (Red)	1
2015-4C	2" High - 1/2" x 13 Thread (Red)	1



Tape

8.5 mil Premium Vinyl Tape - Professional Grade

Std. Pkg.

5243	Black	3/4" x 66'	100
4247	Black	1" x 66'	80
4252	Black	1-1/2" x 66'	100
4311	Black	2" x 66'	40

7 mil Vinyl Tape - Economy Grade

Std. Pkg.

5126	Black	3/4" x 60'	100
5898	Green	3/4" x 66'	10
5899	Yellow	3/4" x 66'	10
5900	Red	3/4" x 66'	10
5901	Blue	3/4" x 66'	10
5902	White	3/4" x 66'	10
5903	Brown	3/4" x 66'	10
5904	Orange	3/4" x 66'	10
5905	Grey	3/4" x 66'	10
5906	Violet	3/4" x 66'	10

7 mil Premium Vinyl Tape - Professional Grade

Std. Pkg.

5175		1/2" x 20'	10
------	--	------------	----

Friction Tape

Std. Pkg.

1002		1/2" x 20'	100
------	--	------------	-----

Rubber Tape

Std. Pkg.

9002		3/4" x 22'	100
------	--	------------	-----

Linerless High Voltage Insulating Tape

Std. Pkg.

9211		3/4" x 30'	100
9212		1" x 30'	80
9213		1-1/2" x 30'	50
9214		2" x 30'	10

High Voltage Tape with Liner

Std. Pkg

2117		3/4" x 30'	100
2132		1" x 30'	80
2134		1-1/2" x 30'	50
2145		2" x 30'	10

Tinned Copper Shielding Tape

Std. Pkg.

5415		1" x 15'	50
5416		1" x 100'	16

Tinned Copper Shielding Braid

Std. Pkg.

2711		3/8" x 100'	1
------	--	-------------	---



Tape

Pressure Sensitive Glass Cloth Tape

	Size	Std. Pkg.
3451	1/2" x 66'	50
3456	3/4" x 66'	10
3459	1" x 108'	20

Silicone Rubber Tape

	Size	Std. Pkg.
3455	1" x 30'	50

Varnished Dacron Glass Cloth Tape

	Size	Std. Pkg.
1121	3/4" x 60'	40

Shielding Tape

	Size	Std. Pkg.
2104	3/4" x 15'	50

Arc and Fireproofing Tape

	Size	Std. Pkg.
3819	3" x 20'	20

Electrical Filler Tape

	Size	Std. Pkg.
2074	1-1/2" x 60'	10

Underground Marking Tape

"CAUTION BURIED ELECTRIC LINE BELOW"

	Type	Size	Std. Pkg.
AMT1003DRE	Detectable	3" x 1000'	5 mil 1
AMT1003RE	Non-detectable	3" x 1000'	4 mil 1
AMT1006RE	Non-detectable	6" x 1000'	4 mil 1

Other Widths, Colours and Printing Available – Please Call



Stop and Go Lights

Outdoor - 115 VAC

	Type	Std. Pkg.
SG10-115RG	Incandescent	1
SG10-115RG-LED	LED	1


Indoor - 115VAC (Includes Bult in Flasher & Switch)

	Type	Std. Pkg.
SG20-115RG	Incandescent	1
SG20-115RG-LED	LED	1

Outdoor / Indoor Kit - 115VAC

	Type	Std. Pkg.
SG30-115RG	Incandescent	1
SG30-115RG-LED	LED	1

Available in 12 VDC and 24 VDC - Please call

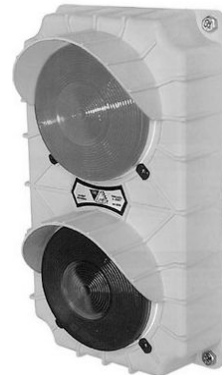


Radiant Heaters

	Std. Pkg.
CL2	1
COZY Legs Flat Panel Heater - 200 Watts	
ETL - Certified Zero-Clearance Item (Cozy Legs may be placed directly against surfaces without risk of fire) Includes Portable Stand and Hi-Low Switch	
	Std. Pkg.
TT	1
TOASTY Toes Adjustable Foot Rest - 105 Watts	
LED Indicator Displays ON/OFF Ergonomic Support for Better Circulation & Support 3 Positions	
	Std. Pkg.
CT	1
COZY Carpeted Foot Warmer - 90 Watts	
LED Indicator Displays ON/OFF	
	Std. Pkg.
FW	1
Heated Floor Mat - Regular (22.95" x 13.97") - 120 Watts	
FWB	1
Heated Floor Mat - Large (36.25" x 16") - 135 Watts	
Made of Heavy Duty, Waterproof Rubber Heating Element is Molded within the Rubber - Eliminating Danger of Fire or Electrical Shock	



Dock Loading Lights

Single Arm	Type	Std. Pkg.
SDL40P	40" - Incandescent	1
SDL40PLED	40" - with LED Bulb	1
SDL40HDLED	40" - Heavy Duty LED	1
SDL60P	60" - Incandescent	1
SDL60PLED	60" - with LED Bulb	1
SDL60HDLED	60" - Heavy Duty LED	1
Double Arm	Type	Std. Pkg.
DL24P	24" - Incandescent	1
DL24PLED	24" - with LED Bulb	1
DL24HDLED	24" - Heavy Duty LED	1
DL40P	40" - Incandescent	1
DL40PLED	40" - with LED Bulb	1
DL40HDLED	40" - Heavy Duty LED	1
DL60P	60" - Incandescent	1
DL60PLED	60" - with LED Bulb	1
DL60HDLED	60" - Heavy Duty LED	1
	Type	Std. Pkg.
HDLED-HEAD	Heavy Duty LED Head Only	1
DLFAN	3 Speed Dock Light Fan	1

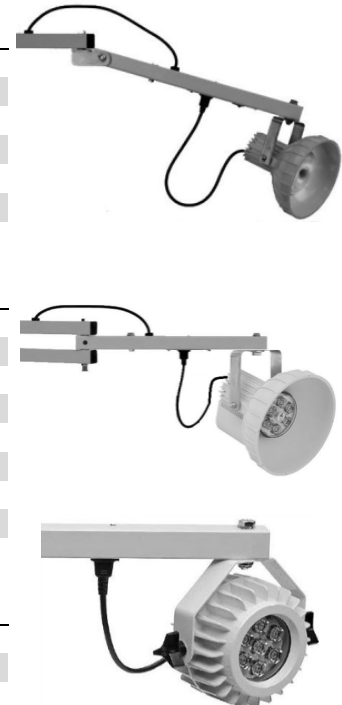


Heavy Duty Head

Heat Shrink Products

Breakout Boots

	Body Range (Inches)	Leg Range (Inches)	No. of Legs
ACBR2-1A	.035 - 1.00	0.15 - 0.53	2
ACBR2-2A	1.25 - 1.70	0.30 - 0.75	2
ACBR2-3A	1.65 - 3.00	0.65 - 1.40	2
ACBR3-1A	0.50 - 1.35	0.20 - 0.55	3
ACBR3-2A	0.85 - 2.20	0.35 - 0.90	3
ACBR3-3A	1.10 - 2.90	0.50 - 1.25	3
ACBR3-4A	2.35 - 5.65	1.20 - 2.10	3
ACBR4-1A	0.70 - 1.25	0.15 - 0.45	4
ACBR4-2A	1.00 - 2.10	0.35 - 0.90	4
ACBR4-3A	1.20 - 3.50	0.55 - 1.40	4
ACBR4-4A	2.35 - 6.05	0.90 - 1.50	4




48" Long Heavy Wall Heat Shrink with Adhesive

	Range (Inches)
AWCSM12/3-1200S	0.14 - 0.39
AWCSM16/4-1200S	0.18 - 0.55
AWCSM24/6-1200S	0.26 - 0.87
AWCSM34/8-1200S	0.35 - 1.22
AWCSM48/12-1200S	0.51 - 1.73
AWCSM56/16-1200S	0.69 - 1.97
AWCSM70/20-1200S	0.87 - 2.48
AWCSM110/30-1200S	1.30 - 3.94
AWCSM130/35-1200S	1.49 - 4.65




End Caps

	Range (Inches)
AESC1A	0.15 - 0.30
AESC2A	0.30 - 0.70
AESC3A	0.65 - 1.25
AESC4A	1.05 - 1.95
AESC5A	1.30 - 2.65
AESC6A	1.85 - 3.70
AESC7A	2.95 - 4.50



Teck Cable Splice Kits - Aluminum/Copper

	KV / and Number of Conductors	Wire Range (inches)
TS14-4-4	1KV / 3 or 4 Cond.	#14 - #4
TS2-3/0-4	1KV / 3 or 4 Cond.	#2 - 3/0
TS4/0-400-4	1KV / 3 or 4 Cond.	4/0 - 400 Mcm
TS500-1000-4	1KV / 3 or 4 Cond.	500 - 1000 Mcm
TS5-3/0-400-3	5KV / 3 Cond.	3/0 - 400 Mcm
TS5-3-2/0-3	5KV / 3 Cond.	#3 - 2/0
TS5-500-1000-3	5KV / 3 Cond.	500 - 1000 Mcm





Heat Shrink Products

Wraparound Cable Support Sleeves - 10" Length

	Wire Range (Inches)
WCSS170/35	0.35 - 1.70
WCSS280/60	0.60 - 2.80
WCSS360/100	1.00 - 3.60
WCSS470/110	1.10 - 4.70

Busbar Insulating Tubing

Heavy Wall - 5-35KV	Range (mm)	Bus Bar Dimensions
ABBIT40/16AU	40 - 16	1" - 1-1/2"
ABBIT75/30AU	75 - 30	2"
ABBIT100/40AU	100 - 40	3"
ABBIT150/60AU	150 - 60	4"
ABBIT180/72AU	180 - 72	6"
Medium Wall - 5-25KV	Range (mm)	Bus Bar Dimensions
ABPTM30/12AU	30 - 12	1" - 1-1/2"
ABPTM50/20AU	50 - 20	2"
ABPTM75/30AU	75 - 30	3"
ABPTM100/40AU	100 - 40	4"
ABPTM180/72AU	180 - 75	6"



Wire Mesh Grips

Strain Relief Grips

	Cable Range (inches)	Hub Size	Std. Pkg.
BDSR24	0.24 - 0.32	1/2"	1
BDSR32	0.32 - 0.43	1/2"	1
BDSR43	0.43 - 0.54	1/2"	1
BDSR54	0.54 - 0.73	3/4"	1
BDSR73	0.73 - 0.97	1"	1
BDSR97	0.97 - 1.25	1-1/4"	1
BDSR125	1.25 - 1.50	1-1/2"	1
BDSR150	1.50 - 1.70	2"	1
BDSR170	1.70 - 2.00	2-1/2"	1
BDSR200	2.00 - 2.45	2-1/2"	1



Support Grips - Double Eye - Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050DE	0.50 - 0.62	530	1
SPSR062DE	0.63 - 0.74	790	1
SPSR075DE	0.75 - 0.99	1020	1
SPSR100DE	1.00 - 1.24	1610	1
SPSR125DE	1.25 - 1.49	1610	1
SPSR150DE	1.50 - 1.74	1610	1
SPSR175DE	1.75 - 1.99	2150	1
SPSR200DE	2.00 - 2.49	2360	1
SPSR250DE	2.50 - 2.99	3260	1
SPSR300DE	3.00 - 3.49	5750	1
SPSR350DE	3.50 - 3.99	5750	1



Wire Mesh Grips

Stainless Steel Support Grips - Single Eye, Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050US	0.50 - 0.62	1050	1
SPSR062US	0.63 - 0.74	2050	1
SPSR075US	0.75 - 0.99	2050	1
SPSR100US	1.00 - 1.24	2650	1
SPSR125US	1.25 - 1.49	4500	1
SPSR150US	1.50 - 1.74	4500	1
SPSR175US	1.75 - 1.99	6000	1
SPSR200US	2.00 - 2.49	8950	1
SPSR250US	2.50 - 2.99	7750	1
SPSR300US	3.00 - 3.49	8500	1



Stainless Steel

Pulling Grips - Heavy Duty, Rotating Eye

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
PHS050	0.50 - 0.61	5600	1
PHS062	0.62 - 0.74	6800	1
PHS075	0.75 - 0.99	9600	1
PHS100	1.00 - 1.49	16400	1
PHS150	1.50 - 1.99	16400	1
PHS200	2.00 - 2.49	27200	1
PHS250	2.50 - 2.99	33000	1
PHS300	3.00 - 3.49	41000	1
PHS350	3.50 - 3.99	48000	1



Toggle Switches

3/4 H.P. - 10A @ 250 VAC, 20A @ 125VAC

Screw	.250 Quick Connect	Solder	Function	
1185/20	1185Q/20	1185S/20	ON - OFF	SPST
1196/20	1196Q/20	1196S/20	(ON) - OFF	SPST
1186/20	1186Q/20	1186S/20	ON - OFF	SPDT
1241/20	1241Q/20	1241S/20	(ON) - (ON)	SPDT
1185/20	1185Q/20	1185S/20	ON - OFF - ON	SPDT
1195/20	1195Q/20	1195S/20	(ON) - OFF - (ON)	SPDT

1-1/2 H.P. - 10A @ 250 VAC, 20A @ 125VAC

Screw	.250 Quick Connect	Solder	Function	
1188/20	1188Q/20	1188S/20	ON - OFF	DPST
1194/20	1194Q/20	1194S/20	ON - ON	DPDT
1242/20	1242Q/20	1242S/20	(ON) - (ON)	DPDT
1189/20	1189Q/20	1189S/20	ON - OFF - ON	DPDT
1244/20	1244Q/20	-	(ON) - OFF - ON	DPDT
1193/20	1193Q/20	-	(ON) - OFF - (ON)	DPDT

() Momentary Contacts



Many Other Switches Available – Please Call

Termination Lugs

Copper Compression Lug - 1 Hole Short Barrel

	Wire Size	Hole Size	Std. Pkg.
SAL6CT14	6 Str.	1/4"	1
SAL4CT14		1/4"	1
SAL4CT516	4 Str.	5/16"	1
SAL4CT38		3/8"	1
SAL2CT14		1/4"	1
SAL2CT516	2 Str.	5/16"	1
SAL2CT38		3/8"	1
SAL1CT14		1/4"	1
SAL1CT516	1 Str.	5/16"	1
SAL1CT38		3/8"	1
SAL25T516	1/0 Str.	5/16"	1
SAL25T38		3/8"	1
SAL26T38	2/0 Str.	3/8"	1
SAL26T12		1/2"	1
SAL27T38	3/0 Str.	3/8"	1
SAL27T12		1/2"	1
SAL28T38	4/0 Str.	3/8"	1
SAL28T12		1/2"	1
SAL29T12	250 Mcm	1/2"	1
SAL30T12	300 Mcm	1/2"	1
SAL31T12	350 Mcm	1/2"	1
SAL32T58	400 Mcm	5/8"	1
SAL34T58	500 Mcm	5/8"	1
SAL36T58	600 Mcm	5/8"	1
SAL39T58	750 Mcm	5/8"	1
SAL44T58	1000 Mcm	5/8"	1



Copper Compression Lug - 1 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA6C	6 Str.	1/4"	1
SA4C	4 Str.	1/4"	1
SA2C	2 Str.	5/16"	1
SA1C	1 Str.	5/16"	1
SA25	1/0 Str.	5/16"	1
SA26	2/0 Str.	3/8"	1
SA27	3/0 Str.	1/2"	1
SA28	4/0 Str.	1/2"	1
SA29	250 Mcm	1/2"	1
SA30	300 Mcm	1/2"	1
SA31	350 Mcm	1/2"	1
SA32	400 Mcm	1/2"	1
SA34	500 Mcm	1/2"	1
SA36	600 Mcm	1/2"	1
SA39	750 Mcm	1/2"	1
SA44	1000 Mcm	1/2"	1



Termination Lugs / Sleeves

Copper Compression Lug - 2 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA2C-2N	2 Str.	1/2"	1
SA1C-2N	1 Str.	1/2"	1
SA25-2N	1/0 Str.	1/2"	1
SA26-2N	2/0 Str.	1/2"	1
SA27-2N	3/0 Str.	1/2"	1
SA28-2N	4/0 Str.	1/2"	1
SA29-2N	250 Mcm	1/2"	1
SA30-2N	300 Mcm	1/2"	1
SA31-2N	350 Mcm	1/2"	1
SA32-2N	400 Mcm	1/2"	1
SA34-2N	500 Mcm	1/2"	1
SA36-2N	600 Mcm	1/2"	1
SA39-2N	750 Mcm	1/2"	1
SA44-2N	1000 Mcm	1/2"	1
SA45-2N	1250 Mcm	1/2"	1
SA46-2N	1500 Mcm	1/2"	1



Copper Compression Sleeves

Long Barrel	Short Barrel	Wire Size	Std. Pkg.
SS6C	SSL6C	6 Str.	1
SS4C	SSL4C	4 Str.	1
SS2C	SSL2C	2 Str.	1
SS1C	SSL1C	1 Str.	1
SS25	SSL25	1/0 Str.	1
SS26	SSL26	2/0 Str.	1
SS27	SSL27	3/0 Str.	1
SS28	SSL28	4/0 Str.	1
SS29	SSL29	250 Mcm	1
SS30	SSL30	300 Mcm	1
SS31	SSL31	350 Mcm	1
SS32	SSL32	400 Mcm	1
SS34	SSL34	500 Mcm	1
SS36	SSL36	600 Mcm	1
SS39	SSL39	750 Mcm	1
SS44	SSL44	1000 Mcm	1



Aluminum Compression Lug - 1 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA26A1	2/0 Str.	1/2"	1
SA27A3	3/0 Str.	1/2"	1
SA28A3	4/0 Str.	1/2"	1
SA29A1	250 Mcm	1/2"	1
SA30A3	300 Mcm	1/2"	1
SA31A1	350 Mcm	1/2"	1
SA32A1	400 Mcm	5/8"	1
SA34A1	500 Mcm	5/8"	1
SA36A1	600 Mcm	5/8"	1
SA39A3	750 Mcm	5/8"	1
SA44A1	1000 Mcm	5/8"	1



Termination Lugs / Sleeves / Pin Adapters

Aluminum Compression Lug - 2 Hole Long Barrel

	Wire Size	Hole Size	Std. Pkg.
SA26A3	2/0 Str.	1/2"	1
SA27A5	3/0 Str.	1/2"	1
SA28A5	4/0 Str.	1/2"	1
SA29A3	250 Mcm	1/2"	1
SA30A3	300 Mcm	1/2"	1
SA31A3	350 Mcm	1/2"	1
SA32A3	400 Mcm	1/2"	1
SA34A3	500 Mcm	1/2"	1
SA36A3	600 Mcm	1/2"	1
SA39A5	750 Mcm	1/2"	1
SA44A3	1000 Mcm	1/2"	1



Aluminum Compression Sleeves

	Wire Size	Std. Pkg.
SS26A1	2/0 Str.	1
SS27A1	3/0 Str.	1
SS28A1	4/0 Str.	1
SS29A1	250 Mcm	1
SS30A1	300 Mcm	1
SS31A1	350 Mcm	1
SS32A1	400 Mcm	1
SS34A1	500 Mcm	1
SS36A1	600 Mcm	1
SS39A1	750 Mcm	1
SS44A1	1000 Mcm	1



Compression Pin Adapters

Straight Pin	Offset Pin	Wire Size	Std. Pkg.
SYP6	-	6 Str.	1
SYP4	-	4 Str.	1
SYP2	-	2 Str.	1
SYP1	-	1 Str.	1
SYP1/0	SYPO1/0	1/0 Str.	1
-	SYPO2/0	2/0 Str.	1
-	SYPO3/0	3/0 Str.	1
-	SYPO4/0	4/0 Str.	1
SYP250	SYPO250	250 Mcm	1
-	SYPO300	300 Mcm	1
SYP350	SYPO350	350 Mcm	1
-	SYPO400	400 Mcm	1
SYP500	SYPO500	500 Mcm	1
-	SYPO600	600 Mcm	1
SYP750	SYPO750	750 Mcm	1



To terminate both Copper & Aluminum Conductors for use with Mechanical Connectors

Mechanical Lugs

One Cable	Wire Range	Mounting Holes	Std. Pkg.
SA6S	#6 - #14 Awg	1	1
SA2	#2 - #14 Awg	1	1
SA0	1/0 - #14 Awg	1	1
SA2/0	2/0 - #14 Awg	1	1
SA250	250 Mcm - #6 Awg	1	1
SA300	300 Mcm - #6 Awg	1	1
SA350	350 Mcm - #6 Awg	1	1
SA500	500 Mcm - #4 Awg	1	1
SA600	600 Mcm - #2 Awg	1	1
SA800	800 - 300 Mcm	1	1
SA1000	1000 - 500 Mcm	1	1
SA350-2NS	350 Mcm - #6 Awg	2	1
SA600-2NS	600 Mcm - #2 Awg	2	1
SA800-2N	800 - 300 Mcm	2	1
SA1000-2N	1000 - 500 Mcm	2	1

Two Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
SU0	1/0 - #14 Awg	1	1
SU2/0	2/0 - #14 Awg	1	1
SU250	250 Mcm - #6 Awg	1	1
SU350	350 Mcm - #6 Awg	1	1
SU600	600 Mcm - #2 Awg	1	1
SU800	800 - 300 Mcm	1	1
SU1000	1000 - 500 Mcm	1	1
SU350-2N	350 Mcm - #6 Awg	2	1
SU600-2NS	600 Mcm - #2 Awg	2	1
SU800-2NS	800 - 300 Mcm	2	1
SU1000-2NS	1000 - 500 Mcm	2	1

Three Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
S3A4-250N	250 Mcm - #6 Awg	2 or 4	1
S3A4-350N	350 Mcm - #6 Awg	2 or 4	1
S3A4-600N	600 Mcm - #2 Awg	2 or 4	1
S3A4-800N	800 - 300 Mcm	2 or 4	1
S3A4-1000N	1000 - 500 Mcm	2 or 4	1

Four Cables Side by Side	Wire Range	Mounting Holes	Std. Pkg.
S4A4-600N	600 Mcm - # 6 Awg	4	1
S4A4-1000N	1000 - 500 Mcm	4	1

Step Lugs Two, Three and Four Cables	Wire Range	Mounting Holes	Std. Pkg.
SB2-300	300 Mcm - #6 Awg	1	1
SB2-600	600 Mcm - #2 Awg	2	1
SB2-800	800 - 300 Mcm	2	1
SB3-600	600 Mcm - #2 Awg	2	1
SB4-600	600 Mcm - #2 Awg	2	1
SB4-800	800 - 300 Mcm	2	1



Thread Adapters

PG to NPT	Male	Female	Std. Pkg.
1234/0912	PG9	1/2" NPT	1
1234/1112	PG11	1/2" NPT	1
1234/1138	PG11	3/8" NPT	1
1234/1312	PG13	1/2" NPT	1
1234/1612	PG16	1/2" NPT	1
1234/2112	PG21	1/2" NPT	1
1234/2134	PG21	3/4" NPT	1
1234/2910	PG29	1" NPT	1
1234/36125	PG36	1-1/4" NPT	1
1234/36150	PG36	1-1/2" NPT	1
1234/42150	PG42	1-1/2" NPT	1
Metric to NPT	Male	Female	Std. Pkg.
1234M1612	M16	1/2" NPT	1
1234M2012	M20	1/2" NPT	1
1234M2512	M25	1/2" NPT	1
1234M2534	M25	3/4" NPT	1
1234M3210	M32	1" NPT	1
1234M3234	M32	3/4" NPT	1

Available in Explosion Proof and Stainless Steel



Grounding

Water Pipe Clamp - Zinc Die Cast with Steel Screws

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10BG	1/2" - 1"	8 Sol.	2 Str.	25



Water Pipe Clamp - Bronze with Bronze Screws for Direct Burial

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10BR	1/2" - 1"	10 Sol.	2 Str.	25



Water Pipe Clamps - Bronze with Steel Screws

	Trade Size	Ground Wire Size		Std. Pkg.
		Min.	Max.	
10B	1/2" - 1"	10 Sol.	2 Str.	25
34B	1-1/4" - 2"	10 Sol.	2 Str.	1
35A	2-1/2" - 4"	10 Sol.	2 Str.	1
36A	4" - 6"	10 Sol.	2 Str.	1



Lay-In Grounding Lugs - Aluminum

	Ground Wire Size	Std. Pkg.
AL4	#4 - #14	100
AL1/0	180 - #8	100
AL3/0	3/0 - #6	50
AL250	250 Mcm - #6	50

Available in Copper



EMT

EMT Conduit Elbows

90 Degree	Size	Std. Pkg.
SWEEP50EMT	1/2"	50
SWEEP75EMT	3/4"	50
SWEEP100EMT	1"	25
SWEEP125EMT	1-1/4"	20
SWEEP150EMT	1-1/2"	15
SWEEP200EMT	2"	10
SWEEP250EMT	2-1/2"	1
SWEEP300EMT	3"	1
SWEEP350EMT	3-1/2"	1
SWEEP400EMT	4"	1
45 Degree	Size	Std. Pkg.
SWEEP50-45EMT	1/2"	50
SWEEP75-45EMT	3/4"	50
SWEEP100-45EMT	1"	25
SWEEP125-45EMT	1-1/4"	20
SWEEP150-45EMT	1-1/2"	15
SWEEP200-45EMT	2"	10
SWEEP250-45EMT	2-1/2"	1
SWEEP300-45EMT	3"	1
SWEEP350-45EMT	3-1/2"	1
SWEEP400-45EMT	4"	1

Available in 15, 22-1/2 and 30 Degree



EMT Pipe Straps

1 Hole	Size	Std. Pkg.
142S	1/2"	100
143S	3/4"	100
144S	1"	50
145S	1-1/4"	50
146S	1-1/2"	50
147S	2"	50
138S	2-1/2"	25
139S	3"	25
141S	3-1/2"	10
148S	4"	10
2 Hole	Size	Std. Pkg.
2142S	1/2"	250
2143S	3/4"	200
2144S	1"	100
2145S	1-1/4"	50
2146S	1-1/2"	50
2147S	2"	25
2138S	2-1/2"	25
2139S	3"	20
2141S	3-1/2"	10
2148S	4"	10



EMT

Combination EMT/Rigid Conduit Bodies c/w Cover & Gasket

C	Size	Std. Pkg.
C1CA	1/2"	10
C2CA	3/4"	10
C3CA	1"	5
C4CA	1-1/4"	1
C5CA	1-1/2"	1
C6CA	2"	1
LB	Size	Std. Pkg.
LB1CA	1/2"	10
LB2CA	3/4"	10
LB3CA	1"	5
LB4CA	1-1/4"	1
LB5CA	1-1/2"	1
LB6CA	2"	1
LL	Size	Std. Pkg.
LL1CA	1/2"	10
LL2CA	3/4"	10
LL3CA	1"	5
LL4CA	1-1/4"	1
LL5CA	1-1/2"	1
LL6CA	2"	1
LR	Size	Std. Pkg.
LR1CA	1/2"	10
LR2CA	3/4"	10
LR3CA	1"	5
LR4CA	1-1/4"	1
LR5CA	1-1/2"	1
LR6CA	2"	1
T	Size	Std. Pkg.
T1CA	1/2"	10
T2CA	3/4"	10
T3CA	1"	5
T4CA	1-1/4"	1
T5CA	1-1/2"	1
T6CA	2"	1



EMT Set Screw Conduit Bodies c/w Cover & Gasket

C	LB	Size	Std. Pkg.
C7ATCG	LB7ATCG	2-1/2"	1
C8ATCG	LB8ATCG	3"	1
C10ATCG	LB10ATCG	4"	1
LL	LR	Size	Std. Pkg.
LL7ATCG	LR7ATCG	2-1/2"	1
LL8ATCG	LR8ATCG	3"	1
LL10ATCG	LR10ATCG	4"	1



EMT


EMT Pull Elbows - Die Cast

Female to Female	Size	Std. Pkg.
1326	1/2"	10
1327	3/4"	5
1328	1"	1
1329	1-1/4"	1
Male to Female	Size	Std. Pkg.
1332	1/2"	10
1333	3/4"	5



EMT Offset Set Screw Connector - Die Cast

	Size	Std. Pkg.
1250	1/2"	10
1251	3/4"	10



EMT to Flexible Metal Conduit Connector - Die Cast

	Size	Std. Pkg.
170C	1/2" EMT - 3/8" Flex	50
171C	1/2" EMT - 1/2" Flex	25
172C	3/4" EMT - 3/4" Flex	20
173C	1" EMT - 1" Flex	10



EMT Compression to Rigid Coupling

	Size	Std. Pkg.
ERC22	1/2"	25
ERC23	3/4"	25
ERC24	1"	25



EMT Set Screw Connectors & Couplings - Steel

Connectors	Size	Std. Pkg.
S1110	1/2"	50
S1111	3/4"	25
S1112	1"	50
S1112A	1-1/4"	25
S1112B	1-1/2"	10
S1112C	2"	5
S1112D	2-1/2"	1
S1112E	3"	1
S1112F	4"	1



EMT

EMT Set Screw Connectors & Couplings – Steel

Connectors – Insulated	Size	Std. Pkg.
S4066	1/2"	50
S4067	3/4"	25
S4068	1"	50
S4069	1-1/4"	25
S4070	1-1/2"	10
S4071	2"	5
S4072	2-1/2"	1
S4073	3"	1
S4075	4"	1
Coupling	Size	Std. Pkg.
S1113	1/2"	50
S1114	3/4"	25
S1115	1"	50
S1115A	1-1/4"	25
S1115B	1-1/2"	10
S1115C	2"	5
S1115D	2-1/2"	1
S1115E	3"	1
S1115F	4"	1



“Blue Cap” EMT Raintight Connectors & Couplings - Steel

Connectors	Size	Std. Pkg.
S1010RT	1/2"	50
S1011RT	3/4"	25
S1012RT	1"	50
S1013RT	1-1/4"	25
S1014RT	1-1/2"	10
S1015RT	2"	5
S1015DRT	2-1/2"	1
S1015ERT	3"	1
S1015FRT	4"	1
Connectors – Insulated	Size	Std. Pkg.
S4060RT	1/2"	50
S4061RT	3/4"	25
S4062RT	1"	50
S4063RT	1-1/4"	25
S4064RT	1-1/2"	10
S4065RT	2"	5
S4065DRT	2-1/2"	1
S4065ERT	3"	1
S4065FRT	4"	1
Couplings	Size	Std. Pkg.
S1016RT	1/2"	50
S1017RT	3/4"	25
S1018RT	1"	50
S1019RT	1-1/4"	25
S1020RT	1-1/2"	10
S1021RT	2"	5
S1021DRT	2-1/2"	1
S1021ERT	3"	1
S1021FRT	4"	1



Rigid

Strain Relief Connectors

	Colour Code	Range	Std. Pkg.
1/2"			
CG50-250	Red	0.15 - 0.25	25
CG50-350	White	0.25 - 0.35	25
CG50-450	Blue	0.35 - 0.45	25
CG50-560	Green	0.45 - 0.56	25
CG50-650	Brown	0.56 - 0.65	25
3/4"			
CG75-250	Red	0.15 - 0.25	10
CG75-350	White	0.25 - 0.35	10
CG75-450	Blue	0.35 - 0.45	10
CG75-560	Green	0.45 - 0.56	10
CG75-650	Brown	0.56 - 0.65	10
CG75-750	Yellow	0.65 - 0.75	10
CG75-850	Purple	0.75 - 0.85	10
1"			
CG100-560	Green	0.45 - 0.56	5
CG100-650	Brown	0.56 - 0.65	5
CG100-750	Yellow	0.65 - 0.75	5
CG100-850	Purple	0.75 - 0.85	5
CG100-950	Grey	0.85 - 0.95	5
CG100-1050	Black	0.95 - 1.05	5
1-1/4"			
CG125-850	Purple	0.75 - 0.85	5
CG125-950	Grey	0.85 - 0.95	5
CG125-1050	Black	0.95 - 1.05	5
CG125-1150	Orange	1.05 - 1.15	5
CG125-1250	Red	1.15 - 1.25	5
CG125-1375	White	1.25 - 1.375	5
1-1/2"			
CG150-1050	Black	0.95 - 1.05	2
CG150-1150	Orange	1.05 - 1.15	2
CG150-1250	Red	1.15 - 1.25	2
CG150-1375	White	1.25 - 1.375	2


Larger sizes as well as 45° and 90° connectors available - Please Call
Stainless Steel Strain Relief Connectors Available - See Page 70



Swivel Fixture Hanger

		Size	Std. Pkg.
SWV4R (round)	Load Rating 50Lbs.	1/2" or 3/4"	1
SWV4S (square)			

Supplied with 3/4" x 1/2" Steel Reducer



Rigid

Bushings

Die Cast Ground Bushings with Lay-In Lug

	Ground Lug Capacity	Size	Std. Pkg.
20BIZ4L	#14 - #4	1/2"	100
21BIZ4L	#14 - #4	3/4"	50
22BIZ4L	#14 - #4	1"	25
23BIZ4L	#14 - #4	1-1/4"	25
24BIZ4L	#14 - #4	1-1/2"	25
25BIZ4L	#14 - #4	2"	25
26BIZ0L	#14 - 2/0	2-1/2"	1
27BIZ0L	#14 - 2/0	3"	1
28BIZ0L	#14 - 2/0	3-1/2"	1
29BIZ0L	#14 - 2/0	4"	1



Malleable Iron Ground Bushings with Lay-In Lug

	Ground Lug Capacity	Size	Std. Pkg.
26BI0L	#14 - 2/0	2-1/2"	1
27BI0L	#14 - 2/0	3"	1
28BI0L	#14 - 2/0	3-1/2"	1
29BI0L	#14 - 2/0	4"	1
30BI40L	#6 - 250 Mcm	5"	1
31BI40L	#6 - 250 Mcm	6"	1



Available in Hot Dipped Galvanized

Die Cast Split Ground Bushings with Lay-In Lug

	Ground Lug Capacity	Size	Std. Pkg.
SGBS381CL*	#14 - #4	1/2"	1
SGB382CL	#14 - #4	3/4"	1
SGB383CL	#14 - #4	1"	1
SGB384CL	#14 - #4	1-1/4"	1
SGB385CL	#14 - 1/0	1-1/2"	1
SBG386CL	#14 - 1/0	2"	1
SBG387CL	#14 - 1/0	2-1/2"	1
SGB388CL	#14 - 1/0	3"	1
SGB390CL	#6 - 3/0	4"	1

*Steel



Plastic

	Size	Std. Pkg.
PB50	1/2"	100
PB75	3/4"	100
PB100	1"	50
PB125	1-1/4"	25
PB150	1-1/2"	25
PB200	2"	1
PB250	2-1/2"	1
PB300	3"	1
PB350	3-1/2"	1
PB400	4"	1
PB500	5"	1
PB600	6"	1



Rigid

Bushings

Malleable Iron – Insulated	Size	Std. Pkg.
1206	1/2"	100
1207	3/4"	100
1208	1"	50
1209	1-1/4"	25
1210	1-1/2"	25
1211	2"	1
1212	2-1/2"	1
1213	3"	1
1214	3-1/2"	1
1215	4"	1
1216	5"	1
1217	6"	1



Locknuts

Steel	Size	Std. Pkg.
705X	3/8" Oversized Locknut	250
LN50	1/2"	100
LN75	3/4"	100
LN100	1"	50
LN125	1-1/4"	100
LN150	1-1/2"	100
LN200	2"	50
LN250	2-1/2"	50
LN300	3"	25
LN350	3-1/2"	25
LN400	4"	1
LN500	5"	1
LN600	6"	1



705X

Aluminum	Size	Std. Pkg.
LN50AL	1/2"	100
LN75AL	3/4"	100
LN100AL	1"	50
LN125AL	1-1/4"	100
LN150AL	1-1/2"	100
LN200AL	2"	50
LN250AL	2-1/2"	50
LN300AL	3"	25
LN350AL	3-1/2"	25
LN400AL	4"	1
LN500AL	5"	1
LN600AL	6"	1



Sealing Locknut	Size	Std. Pkg.
706P	1/2"	100
707P	3/4"	100
708P	1"	50
709P	1-1/4"	1
710P	1-1/2"	1
711P	2"	1
712P	2-1/2"	1
713P	3"	1
714P	3-1/2"	1
715P	4"	1
716P	5"	1
717P	6"	1



Rigid

Sealing O-Rings

	Size	Std. Pkg.
SR50	1/2"	100
SR75	3/4"	100
SR100	1"	100
SR125	1-1/4"	50
SR150	1-1/2"	50
SR200	2"	50
SR250	2-1/2"	1
SR300	3"	1
SR350	3-1/2"	1
SR400	4"	1
SR500	5"	1
SR600	6"	1



Oil-Tight Hole Seals

	Size	Std. Pkg.
S050	1/2"	10
S075	3/4"	10
S100	1"	10
S125	1-1/4"	10
S150	1-1/2"	10
S200	2"	10
S250	2-1/2"	10
S300	3"	10
S350	3-1/2"	10
S400	4"	10



Available in Stainless Steel

Knock-Out Seals - Steel

	Size	Std. Pkg.
SS50	1/2"	200
SS52	3/4"	200
SS54	1"	200
SS56	1-1/4"	50
SS58	1-1/2"	50
SS60	2"	25
SS62*	2-1/2"	10
SS64*	3"	10
SS66*	3-1/2"	10
SS68*	4"	10

* Three Piece Design



Offset Nipples

Die Cast

	Size	Std. Pkg.
C41	1/2"	10
C42	3/4"	10
C43	1"	10
C44	1-1/4"	5
C45	1-1/2"	5
C46	2"	2



Malleable Iron

	Size	Std. Pkg.
OSN50	1/2"	10
OSN75	3/4"	10
OSN100	1"	10
OSN125	1-1/4"	5



Rigid

Bushed Nipples

Malleable Iron	Size	Std. Pkg.
90	1/2"	100
91	3/4"	100
92	1"	50
93	1-1/4"	25
94	1-1/2"	1
95	2"	1
96	2-1/2"	1
97	3"	1
98	3-1/2"	1
99	4"	1
995	5"	1
996	6"	1

Die Cast	Size	Std. Pkg.
90Z	1/2"	100
91Z	3/4"	100
92Z	1"	50
93Z	1-1/4"	25
94Z	1-1/2"	1
95Z	2"	1
96Z	2-1/2"	1
97Z	3"	1
98Z	3-1/2"	1
99Z	4"	1



Service Entrance Heads - Threaded - Aluminum

	Size	Std. Pkg.
400	1/2"	10
401	3/4"	10
402	1"	10
403	1-1/4"	1
404	1-1/2"	1
405	2"	1
406	2-1/2"	1
407	3"	1
408	3-1/2"	1
409	4"	1



3 Piece Couplings - Malleable Iron

	Size	Std. Pkg.
1022	1/2"	20
1023	3/4"	10
1024	1"	1
1025	1-1/4"	1
1026	1-1/2"	1
1027	2"	1
1028	2-1/2"	2
1029	3"	2
1030	3-1/2"	1
1031	4"	1
1005	5"	1
1006	6"	1



Available in Hot Dipped Galvanized

Rigid

Conduit Straps

One Hole - Steel	Size	Std. Pkg.
132S	1/2"	100
133S	3/4"	100
134S	1"	100
135S	1-1/4"	100
136S	1-1/2"	50
137S	2"	50
138S	2-1/2"	50
139S	3"	1
141S	3-1/2"	1
148S	4"	1

Two Hole - Steel	Size	Std. Pkg.
2132S	1/2"	250
2133S	3/4"	150
2134S	1"	100
2135S	1-1/4"	50
2136S	1-1/2"	50
2137S	2"	25
2138S	2-1/2"	25
2139S	3"	20
2141S	3-1/2"	15
2148S	4"	10
2150S	5"	10
2152S	6"	10

One Hole - Malleable Iron	Size	Std. Pkg.
132	1/2"	100
133	3/4"	100
134	1"	50
135	1-1/4"	1
136	1-1/2"	1
137	2"	1
138	2-1/2"	1
139	3"	1
141	3-1/2"	1
148	4"	1

Available in Hot Dipped Galvanized

Clamp Backs - Malleable Iron

	Size	Std. Pkg.
900	1/2"	100
901	3/4"	100
902	1"	50
903	1-1/4"	50
904	1-1/2"	1
905	2"	1
906	2-1/2"	1
907	3"	1
908	3-1/2"	1
909	4"	1

Available in Hot Dipped Galvanized



Rigid

Enlargers - Male to Female

	Size	Std. Pkg.
E35	1/2" Male - 3/4" Female	25
E36	3/4" Male - 1" Female	10
E37	1" Male - 1-1/4" Female	10
E38	1-1/4" Male - 1-1/2" Female	10



Floor Flanges

	Size	Std. Pkg.
1F	1/2"	1
2F	3/4"	1
3F	1"	1
4F	1-1/4"	1
5F	1-1/2"	1
6F	2"	1



Conduit Hubs

Die Cast

	Size	Std. Pkg.
WH10	1/2"	25
WH20	3/4"	25
WH30	1"	10
WH40	1-1/4"	5
WH50	1-1/2"	2
WH60	2"	2
WH70	2-1/2"	1
WH80	3"	1
WH90	3-1/2"	1
WH100	4"	1

Aluminum

	Size	Std. Pkg.
TWH10A	1/2"	25
TWH20A	3/4"	25
TWH30A	1"	10
TWH40A	1-1/4"	5
TWH50A	1-1/2"	2
TWH60A	2"	2
TWH70A	2-1/2"	1
TWH80A	3"	1
TWH90A	3-1/2"	1
TWH100A	4"	1

Malleable Iron

	Size	Std. Pkg.
CHM50	1/2"	25
CHM75	3/4"	25
CHM100	1"	10
CHM125	1-1/4"	5
CHM150	1-1/2"	2
CHM200	2"	2
CHM250	2-1/2"	1
CHM300	3"	1
CHM350	3-1/2"	1
CHM400	4"	1
CHM500	5"	1
CHM600	6"	1



Available in Hot Dipped Galvanized

Rigid

Set Screw Connectors & Couplings - Malleable Iron

Connectors	Size	Std. Pkg.
TRC50	1/2"	25
TRC75	3/4"	25
TRC100	1"	5
TRC125	1-1/4"	5
TRC150	1-1/2"	5
TRC200	2"	2
TRC250	2-1/2"	2
TRC300	3"	1
TRC350	3-1/2"	1
TRC400	4"	1

Available with Insulated Throat

Couplings	Size	Std. Pkg.
TRCC50	1/2"	25
TRCC75	3/4"	25
TRCC100	1"	5
TRCC125	1-1/4"	5
TRCC150	1-1/2"	5
TRCC200	2"	2
TRCC250	2-1/2"	2
TRCC300	3"	1
TRCC350	3-1/2"	1
TRCC400	4"	1



Compression Connectors & Couplings - Malleable Iron

Connectors	Size	Std. Pkg.
NTC50	1/2"	25
NTC75	3/4"	25
NTC100	1"	10
NTC125	1-1/4"	5
NTC150	1-1/2"	2
NTC200	2"	5
NTC250	2-1/2"	1
NTC300	3"	1
NTC350	3-1/2"	1
NTC400	4"	1

Available with Insulated Throat

Couplings	Size	Std. Pkg.
NTCC50	1/2"	25
NTCC75	3/4"	25
NTCC100	1"	10
NTCC125	1-1/4"	5
NTCC150	1-1/2"	2
NTCC200	2"	5
NTCC250	2-1/2"	1
NTCC300	3"	1
NTCC350	3-1/2"	1
NTCC400	4"	1



Rigid

Pull Elbows

Female to Female - Die Cast	Size	Std. Pkg.
1313	1/2"	10
1314	3/4"	5
1315	1"	25
1316	1-1/4"	20
Female to Female - Malleable Iron	Size	Std. Pkg.
PEF50	1/2"	10
PEF75	3/4"	5
PEF100	1"	1
PEF125	1-1/4"	1
PEF150	1-1/2"	1
PEF200	2"	1
Male to Female - Die Cast	Size	Std. Pkg.
1320	1/2"	10
1321	3/4"	5
Male to Female - Malleable Iron	Size	Std. Pkg.
PEM50	1/2"	10
PEM75	3/4"	5
PEM100	1"	1
PEM125	1-1/4"	1
PEM150	1-1/2"	1
PEM200	2"	1



Reducing Bushings

	Size	Std. Pkg.
RE21K	3/4" x 1/2"	200
RE31K	1" x 1/2"	100
RE32K	1" x 3/4"	
RE41K	1-1/4" x 1/2"	
RE42K	1-1/4" x 3/4"	50
RE43K	1-1/4" x 1"	
RE51K	1-1/2" x 1/2"	
RE52K	1-1/2" x 3/4"	50
RE53K	1-1/2" x 1"	
RE54K	1-1/2" x 1-1/4"	
RE61K	2" x 1/2"	
RE62K	2" x 3/4"	
RE63K	2" x 1"	25
RE64K	2" x 1-1/4"	
RE65K	2" x 1-1/2"	
RE71K*	2-1/2" x 1/2"	
RE72K*	2-1/2" x 3/4"	
RE73K*	2-1/2" x 1"	10
RE74K*	2-1/2" x 1-1/4"	
RE75K*	2-1/2" x 1-1/2"	
RE76K*	2-1/2" x 2"	

*Stocked with Hex Head



Rigid

Reducing Bushings

Size Std. Pkg.

RE81K*	3" x 1/2"	10
RE82K*	3" x 3/4"	
RE83K*	3" x 1"	
RE84K*	3" x 1-1/4"	
RE85K*	3" x 1-1/2"	
RE86K*	3" x 2"	5
RE87K*	3" x 2-1/2"	
RE91K*	3-1/2" x 1/2"	
RE92K*	3-1/2" x 3/4"	
RE93K*	3-1/2" x 1"	
RE94K*	3-1/2" x 1-1/4"	5
RE95K*	3-1/2" x 1-1/2"	
RE96K*	3-1/2" x 2"	
RE97K*	3-1/2" x 2-1/2"	
RE98K*	3-1/2" x 3"	
RE101K*	4" x 1/2"	5
RE102K*	4" x 3/4"	
RE103K*	4" x 1"	
RE104K*	4" x 1-1/4"	
RE105K*	4" x 1-1/2"	
RE106K*	4" x 2"	1
RE107K*	4" x 2-1/2"	
RE108K*	4" x 3"	
RE109K*	4" x 3-1/2"	
RE01210K	5" x 4"	
RE01412K	6" x 5"	1

*Stocked with Hex Head



Reducing Washers

Size Std. Pkg.

CW21	3/4" x 1/2"	250
CW31	1" x 1/2"	250
CW32	1" x 3/4"	
CW41	1-1/4" x 1/2"	100
CW42	1-1/4" x 3/4"	
CW43	1-1/4" x 1"	
CW51	1-1/2" x 1/2"	100
CW52	1-1/2" x 3/4"	
CW53	1-1/2" x 1"	
CW54	1-1/2" x 1-1/4"	
CW61	2" x 1/2"	50
CW62	2" x 3/4"	
CW63	2" x 1"	
CW64	2" x 1-1/4"	
CW65	2" x 1-1/2"	
CW71	2-1/2" x 1/2"	50
CW72	2-1/2" x 3/4"	
CW73	2-1/2" x 1"	
CW74	2-1/2" x 1-1/4"	
CW75	2-1/2" x 1-1/2"	
CW76	2-1/2" x 2"	



Rigid

Reducing Washers

	Size	Std. Pkg.
CW81	3" x 1/2"	
CW82	3" x 3/4"	
CW83	3" x 1"	
CW84	3" x 1-1/4"	25
CW85	3" x 1-1/2"	
CW86	3" x 2"	
CW87	3" x 2-1/2"	
CW91	3-1/2" x 1/2"	
CW92	3-1/2" x 3/4"	
CW93	3-1/2" x 1"	
CW94	3-1/2" x 1-1/4"	10
CW95	3-1/2" x 1-1/2"	
CW96	3-1/2" x 2"	
CW97	3-1/2" x 2-1/2"	
CW98	3-1/2" x 3"	
CW101	4" x 1/2"	
CW102	4" x 3/4"	
CW103	4" x 1"	
CW104	4" x 1-1/4"	10
CW105	4" x 1-1/2"	
CW106	4" x 2"	
CW107	4" x 2-1/2"	
CW108	4" x 3"	
CW109	4" x 3-1/2"	



Conduit Bodies c/w Cover & Gasket - Aluminum

C	LB	LL	LR	Size	Std. Pkg.
C1ACG	LB1ACG	LL1ACG	LR1ACG	1/2"	50
C2ACG	LB2ACG	LL2ACG	LR2ACG	3/4"	50
C3ACG	LB3CAG	LL3ACG	LR3ACG	1"	25
C4ACG	LB4ACG	LL4ACG	LR4ACG	1-1/4"	10
C5ACG	LB5ACG	LL5ACG	LR5ACG	1-1/2"	10
C6ACG	LB6ACG	LLCACG	LR6ACG	2"	5
C7ACG	LB7ACG	LL7ACG	LR7ACG	2-1/2"	1
C8ACG	LB8ACG	LL8ACG	LR8ACG	3"	1
C10ACG	LB10ACG	LL10ACG	LR10ACG	4"	1



T	Size	Std. Pkg.
T1ACG	1/2"	50
T2ACG	3/4"	50
T3ACG	1"	25
T4ACG	1-1/4"	10
T5ACG	1-1/2"	10
T6ACG	2"	5
T7ACG	2-1/2"	1
T8ACG	3"	1
T10ACG	4"	1



Rigid

Conduit Bodies c/w Cover & Gasket - Malleable Iron

C	LB	LL	LR	Size	Std. Pkg.
C1CG	LB1CG	LL1CG	LR1CG	1/2"	10
C2CG	LB2CG	LL2CG	LR2CG	3/4"	10
C3CG	LB3CG	LL3CG	LR3CG	1"	5
C4CG	LB4CG	LL4CG	LR4CG	1-1/4"	1
C5CG	LB5CG	LL5CG	LR5CG	1-1/2"	1
C6CG	LB6CG	LL6CG	LR6CG	2"	1
C7CG	LB7CG	LL7CG	LR7CG	2-1/2"	1
C8CG	LB8CG	LL8CG	LR8CG	3"	1
C9CG	LB9CG	LL9CG	LR9CG	3-1/2"	1
C10CG	LB10CG	LL10CG	LR10CG	4"	1

Available with Cast Covers

Available in Hot Dipped Galvanized



I	Size	Std. Pkg.
T1CG	1/2"	10
T2CG	3/4"	10
T3CG	1"	5
T4CG	1-1/4"	1
T5CG	1-1/2"	1
T6CG	2"	1
T7CG	2-1/2"	1
T8CG	3"	1
T10CG	4"	1

Available with Cast Covers

Available in Hot Dipped Galvanized



Form 7 Conduit Bodies c/w Cover & Gasket - Malleable Iron

C	LB	LL	LR	Size	Std. Pkg.
C17F7	LB17F7	LL17F7	LR17F7	1/2"	10
C27F7	LB27F7	LL27F7	LR27F7	3/4"	10
C37F7	LB37F7	LL37F7	LR37F7	1"	5
C47F7	LB47F7	LL47F7	LR47F7	1-1/4"	10
C57F7	LB57F7	LL57F7	LR57F7	1-1/2"	10
C67F7	LB67F7	LL67F7	LR67F7	2"	1
C77F7	LB77F7	LL77F7	LR77F7	2-1/2"	1
C87F7	LB87F7	LL87F7	LR87F7	3"	1
C97F7	LB97F7	LL97F7	LR97F7	3-1/2"	1
C107F7	LB107F7	LL107F7	LR107F7	4"	1

Available with Cast Covers

I	Size	Std. Pkg.
T17F7	1/2"	10
T27F7	3/4"	10
T37F7	1"	5
T47F7	1-1/4"	10
T57F7	1-1/2"	1
T67F7	2"	1
T77F7	2-1/2"	1
T87F7	3"	1
T107F7	4"	1

Available with Cast Covers



Rigid


Cast Device Boxes

Single Gang	Type	Size	Std. Pkg.
FS50	Dead End - Shallow	1/2"	1
FS75	Dead End - Shallow	3/4"	1
FS100	Dead End - Shallow	1"	1
FSC50	Pull Thru - Shallow	1/2"	1
FSC75	Pull Thru - Shallow	3/4"	1
FSC100	Pull Thru - Shallow	1"	1
FD50	Dead End - Deep	1/2"	1
FD75	Dead End - Deep	3/4"	1
FD100	Dead End - Deep	1"	1
FDC50	Pull Thru - Deep	1/2"	1
FDC75	Pull Thru - Deep	3/4"	1
FDC100	Pull Thru - Deep	1"	1

Available in Hot Dipped Galvanized

Double Gang	Type	Size	Std. Pkg.
FS2-50	Dead End - Shallow	1/2"	1
FS2-75	Dead End - Shallow	3/4"	1
FS2-100	Dead End - Shallow	1"	1
FSC2-50	Pull Thru - Shallow	1/2"	1
FSC2-75	Pull Thru - Shallow	3/4"	1
FSC2-100	Pull Thru - Shallow	1"	1
FD2-50	Dead End - Deep	1/2"	1
FD2-75	Dead End - Deep	3/4"	1
FD2-100	Dead End - Deep	1"	1
FDC2-50	Pull Thru - Deep	1/2"	1
FDC2-75	Pull Thru - Deep	3/4"	1
FDC2-100	Pull Thru - Deep	1"	1



Available in Hot Dipped Galvanized

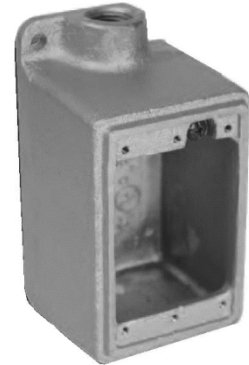

Device Box Covers

Single Gang	Type	Std. Pkg.
FSFD-CS1	Stamped Steel Blank	5
FSFD-CS2	Stamped Steel Switch	5
FSFD-CS3	Stamped Steel Duplex	5
FSFD-CS4	Stamped Steel GFI	5
FSFD-CM1	Malleable Blank	5
FSFD-CM2	Malleable Switch	5
FSFD-CM3	Malleable Duplex	5
FSFD-CG	Gasket	10

Double Gang	Type	Std. Pkg.
FSFD2-CS1	Stamped Steel Blank	5
FSFD2-CS2	Stamped Steel Switch	10
FSFD2-CS3	Stamped Steel Duplex	10
FSFD2-CS4	Stamped Steel GFI	5
FSFD2-CS5	Stamped Steel Switch /	10
FSFD2-CS6	Stamped Steel Switch / Single	10
FSFD2-CM1	Malleable Blank	10
FSFD2-CM2	Malleable Switch	5
FSFD2-CG	Gasket	20



Conduit Hangers / Beam Clamps

Conduit Hangers with Bolt - Steel

	Size	Std. Pkg.
10CS	3/8" - 1/2"	100
11CS	3/4"	100
12CS	1"	100
13CS	1-1/4"	100
14CS	1-1/2"	100
15CS	2"	50
16CS	2-1/2"	50
17CS	3"	50
18CS	3-1/2"	25
19CS	4"	25

Beam Clamps - Malleable Iron

	Size	Std. Pkg.
620	1" (1/4-20)	25
625	2" (3/8-16)	25
627	2-1/2" (1/2-13)	25

J- Clamp

	Size	Std. Pkg.
JC50	1/2"	25
JC75	3/4"	25
JC100	1"	10
JC100-125	1" - 1-1/4"	1
JC150-200	1-1/2" - 2"	1
JC250-300	2-1/2" - 3"	1
JC350-400	3-1/2" - 4"	1

Right Angle

	Size	Std. Pkg.
RA50	1/2"	50
RA75	3/4"	50
RA100	1"	50
RA125	1-1/4"	25
RA150	1-1/2"	25
RA200	2"	25
RA250	2-1/2"	10
RA300	3"	10
RA350	3-1/2"	10
RA400	4"	10

Parallel Type

	Size	Std. Pkg.
PAR50	1/2"	50
PAR75	3/4"	50
PAR100	1"	50
PAR125	1-1/4"	25
PAR150	1-1/2"	25
PAR200	2"	25
PAR250	2-1/2"	10
PAR300	3"	10
PAR350	3-1/2"	10
PAR400	4"	10

Edge Type

	Size	Std. Pkg.
ET50	1/2"	50
ET75	3/4"	50
ET100	1"	50
ET125	1-1/4"	25
ET150	1-1/2"	25
ET200	2"	25



Explosion Proof

Explosion Proof Reducing Bushings

Steel	Size	Std. Pkg.
RB75-50S	3/4" x 1/2"	50
RB100-50S	1" x 1/2"	50
RB100-75S	1" x 3/4"	50
RB125-50S	1-1/4" x 1/2"	25
RB125-75S	1-1/4" x 3/4"	25
RB125-100S	1-1/4" x 1"	25
RB150-50S	1-1/2" x 1/2"	25
RB150-75S	1-1/2" x 3/4"	25
RB150-100S	1-1/2" x 1"	25
RB150-125S	1-1/2" x 1-1/4"	25
RB200-50S	2" x 1/2"	5
RB200-75S	2" x 3/4"	5
RB200-100S	2" x 1"	5
RB200-125S	2" x 1-1/4"	5
RB200-150S	2" x 1-1/2"	5
Aluminum	Size	Std. Pkg.
RB75-50A	3/4" x 1/2"	50
RB100-50A	1" x 1/2"	50
RB100-75A	1" x 3/4"	50
RB125-50A	1-1/4" x 1/2"	25
RB125-75A	1-1/4" x 3/4"	25
RB125-100A	1-1/4" x 1"	25
RB150-50A	1-1/2" x 1/2"	25
RB150-75A	1-1/2" x 3/4"	25
RB150-100A	1-1/2" x 1"	25
RB150-125A	1-1/2" x 1-1/4"	25
RB200-50A	2" x 1/2"	5
RB200-75A	2" x 3/4"	5
RB200-100A	2" x 1"	5
RB200-125A	2" x 1-1/4"	5
RB200-150A	2" x 1-1/2"	5

Larger Sizes Available



Explosion Proof Conduit Unions

Steel - Male	Size	Std. Pkg.
UM50S	1/2"	10
UM75S	3/4"	10
UM100S	1"	5
Steel - Female	Size	Std. Pkg.
UF50S	1/2"	10
UF75S	3/4"	10
UF100S	1"	5
Aluminum - Male	Size	Std. Pkg.
UM50A	1/2"	10
UM75A	3/4"	10
UM100A	1"	5
Aluminum - Female	Size	Std. Pkg.
UF50A	1/2"	10
UF75A	3/4"	10
UF100A	1"	5

Larger Sizes Available



Sealtite (Liquid-Tight) Connectors

Zinc Die Cast - Non-Insulated

Straight	Size	Std. Pkg.
LTC38Z	3/8"	25
LTC50Z	1/2"	25
LTC75Z	3/4"	10
LTC100Z	1"	5
LTC125Z	1-1/4"	5
LTC150Z	1-1/2"	1
LTC200Z	2"	1
LTC250Z	2-1/2"	1
LTC300Z	3"	1
LTC350Z	3-1/2"	1
LTC400Z	4"	1

90 Degree	Size	Std. Pkg.
LTC9038Z	3/8"	10
LTC9050Z	1/2"	10
LTC9075Z	3/4"	10
LTC90100Z	1"	5
LTC90125Z	1-1/4"	1
LTC90150Z	1-1/2"	1
LTC90200Z	2"	1
LTC90250Z	2-1/2"	1
LTC90300Z	3"	1
LTC90350Z	3-1/2"	1
LTC90400Z	4"	1



Malleable Iron - Insulated Throat

Straight	Size	Std. Pkg.
LTC38T	3/8"	25
LTC50T	1/2"	25
LTC75T	3/4"	10
LTC100T	1"	5
LTC125T	1-1/4"	5
LTC150T	1-1/2"	10
LTC200T	2"	5
LTC250T	2-1/2"	1
LTC300T	3"	1
LTC350T	3-1/2"	1
LTC400T	4"	1
LTC500T*	5"	1
LTC600T*	6"	1

90 Degree	45 Degree	Size	Std. Pkg.
LTC9038T	LTC4538T	3/8"	10
LTC9050T	LTC4550T	1/2"	10
LTC9075T	LTC4575T	3/4"	10
LTC90100T	LTC45100T	1"	5
LTC90125T	LTC45125T	1-1/4"	10
LTC90150T	LTC45150T	1-1/2"	10
LTC90200T	LTC45200T	2"	5
LTC90250T*	LTC45250T*	2-1/2"	1
LTC90300T*	LTC45300T*	3"	1
LTC90350T*	LTC45350T*	3-1/2"	1
LTC90400T*	LTC45400T*	4"	1



Available in Mechanical Galvanized

*Available in Hot Dipped Galvanized

Sealtite (Liquid-Tight) Connectors

Malleable Iron - Insulated Throat with Aluminum Ground Lug

Straight	Ground Lug Capacity	Size	Std. Pkg.
SLT47ALT	#4 - #14	3/8"	25
SLT27ALT	#4 - #14	1/2"	25
SLT28ALT	#4 - #14	3/4"	10
SLT29ALT	#4 - #14	1"	5
SLT30ALT	#4 - #14	1-1/4"	5
SLT31ALT	#4 - #14	1-1/2"	10
SLT32ALT	#4 - #14	2"	5
SLT33ALT	1/0 - #8	2-1/2"	1
SLT34ALT	1/0 - #8	3"	1
SLT60ALT	3/0 - #6	3-1/2"	1
SLT61ALT	3/0 - #6	4"	1
SLT62ALT	#6 - 250mcm	5"	1
SLT63ALT	#6 - 250mcm	6"	1



90 Degree	45 Degree	Ground Lug Capacity	Size	Std. Pkg.
SLT25ALT	SLT25-45ALT	#4 - #14	3/8"	10
SLT35ALT	SLT35-45ALT	#4 - #14	1/2"	10
SLT36ALT	SLT36-45ALT	#4 - #14	3/4"	10
SLT37ALT	SLT37-45ALT	#4 - #14	1"	5
SLT38ALT	SLT38-45ALT	#4 - #14	1-1/4"	10
SLT39ALT	SLT39-45ALT	#4 - #14	1-1/2"	10
SLT40ALT	SLT40-45ALT	#4 - #14	2"	5
SLT65ALT	SLT65-45ALT	1/0 - #8	2-1/2"	1
SLT66ALT	SLT66-45ALT	1/0 - #8	3"	1
SLT67ALT	SLT67-45ALT	3/0 - #6	3-1/2"	1
SLT68ALT	SLT68-45ALT	3/0 - #6	4"	1



Available with Copper Grounding Lugs

Sealtite (Liquid-Tight) Flexible Conduit

	Size	Std. Pkg.
CSALT-3/8	3/8"	30 meter carton*
CSALT-1/2	1/2"	30 meter carton*
CSALT-3/4	3/4"	30 meter carton*
CSALT-1	1"	30 meter carton*
CSALT-1-1/4	1-1/4"	15 meter carton*
CSALT-1-1/2	1-1/2"	15 meter carton
CSALT-2	2"	15 meter carton
CSALT-2-1/2	2-1/2"	15 meter carton
CSALT-3	3"	8 meter carton
CSALT-4	4"	8 meter carton

Cut Lengths Available 2" thru 4"

* Available on Reels



Aluminum Flexible Conduit and Connectors

	Size	Std. Pkg.
HWA-3/8	3/8"	75 meter coil*
HWA-7/16	7/16"	75 meter coil*
HWA-1/2	1/2"	30 meter coil*
HWA-3/4	3/4"	30 meter coil*
HWA-1	1"	30 meter coil*
HWA-1-1/4	1-1/4"	15 meter coil*
HWA-1-1/2	1-1/2"	15 meter coil*
HWA-2	2"	8 meter coil*
HWA-2-1/2	2-1/2"	8 meter coil
HWA-3	3"	8 meter coil
HWA-4	4"	8 meter coil

Cut Lengths Available 2" thru 4"

* Available on Reels



Flexible Conduit Connectors

Straight	Type	Size	Std. Pkg.
C27Z	Zinc Die Cast	1/2"	25
C28Z	Zinc Die Cast	3/4"	25
C29Z	Zinc Die Cast	1"	10
C30Z	Zinc Die Cast	1-1/4"	10
C31Z	Zinc Die Cast	1-1/2"	5
C32Z	Zinc Die Cast	2"	10
C32	Malleable Iron	2"	1
C33	Malleable Iron	2-1/2"	1
C34	Malleable Iron	3"	1
C61	Malleable Iron	4"	1
90 Degree	Type	Size	Std. Pkg.
C35Z	Zinc Die Cast	1/2"	25
C36Z	Zinc Die Cast	3/4"	10
C37Z	Zinc Die Cast	1"	5
C38Z	Zinc Die Cast	1-1/4"	10
C39Z	Zinc Die Cast	1-1/2"	1
C40Z	Zinc Die Cast	2"	1
C40	Malleable Iron	2"	1
C65	Malleable Iron	2-1/2"	1
C66	Malleable Iron	3"	1
C68	Malleable Iron	4"	1



Rigid Conduit Couplings – Electro Plated

	Size	Std. Pkg.
COUP50	1/2"	100
COUP75	3/4"	50
COUP100	1"	30
COUP125	1-1/4"	25
COUP150	1-1/2"	25
COUP200	2"	20
COUP250	2-1/2"	24
COUP300	3"	16
COUP350	3-1/2"	12
COUP400	4"	10
COUP500	5"	1
COUP600	6"	1



Rigid Conduit Elbows – Hot Dipped Galvanized

90 Degree	Size	Std. Pkg.
SWEEP50	1/2"	50
SWEEP75	3/4"	50
SWEEP100	1"	25
SWEEP125	1-1/4"	20
SWEEP150	1-1/2"	15
SWEEP200	2"	10
SWEEP250	2-1/2"	1
SWEEP300	3"	1
SWEEP350	3-1/2"	1
SWEEP400	4"	1
45 Degree	Size	Std. Pkg.
SWEEP50-45	1/2"	50
SWEEP75-45	3/4"	50
SWEEP100-45	1"	25
SWEEP125-45	1-1/4"	20
SWEEP150-45	1-1/2"	15
SWEEP200-45	2"	10
SWEEP250-45	2-1/2"	1
SWEEP300-45	3"	1
SWEEP350-45	3-1/2"	1
SWEEP400-45	4"	1



Available in 15, 22-1/2, 30 Degree

Rigid Conduit Nipples – Electro Plated

1/2"	Length	Std. Pkg.
NP50XCL	CLOSE	25
NP50X200	2"	25
NP50X250	2-1/2"	25
NP50X300	3"	25
NP50X400	4"	25
NP50X600	6"	25
NP50X800	8"	25
NP50X1000	10"	25
NP50X1200	12"	25



Rigid Conduit Nipples – Electro Plated

3/4"	Length	Std. Pkg.
NP75XCL	CLOSE	25
NP75X200	2"	25
NP75X250	2-1/2"	25
NP75X300	3"	25
NP75X400	4"	25
NP75X600	6"	25
NP75X800	8"	25
NP75X1000	10"	25
NP75X1200	12"	25

1"	Length	Std. Pkg.
NP100XCL	CLOSE	25
NP100X200	2"	25
NP100X250	2-1/2"	25
NP100X300	3"	25
NP100X400	4"	25
NP100X600	6"	25
NP100X800	8"	25
NP100X1000	10"	25
NP100X1200	12"	25

1-1/4"	Length	Std. Pkg.
NP125XCL	CLOSE	25
NP125X200	2"	25
NP125X250	2-1/2"	25
NP125X300	3"	25
NP125X400	4"	25
NP125X600	6"	25
NP125X800	8"	12
NP125X1000	10"	12
NP125X1200	12"	12

1-1/2"	Length	Std. Pkg.
NP150XCL	CLOSE	25
NP150X200	2"	25
NP150X250	2-1/2"	25
NP150X300	3"	25
NP150X400	4"	25
NP150X600	6"	25
NP150X800	8"	12
NP150X1000	10"	12
NP150X1200	12"	12

2"	Length	Std. Pkg.
NP200XCL	CLOSE	25
NP200X250	2-1/2"	25
NP200X300	3"	25
NP200X400	4"	25
NP200X600	6"	25
NP200X800	8"	12
NP200X1000	10"	12
NP200X1200	12"	12

2-1/2"	Length	Std. Pkg.
NP250XCL	CLOSE	10
NP250X300	3"	10
NP250X400	4"	10
NP250X600	6"	10
NP250X800	8"	5
NP250X1000	10"	5
NP250X1200	12"	5



Rigid Conduit Nipples – Electro Plated

3"	Length	Std. Pkg.
NP300XCL	CLOSE	12
NP300X400	4"	10
NP300X600	6"	10
NP300X800	8"	10
NP300X1000	10"	5
NP300X1200	12"	5
4"	Length	Std. Pkg.
NP400XCL	CLOSE	10
NP400X400	4"	10
NP400X600	6"	10
NP400X800	8"	5
NP400X1000	10"	5
NP400X1200	12	5
5"	Length	Std. Pkg.
NP500XCL	CLOSE	4
NP500X600	6"	4
NP500X800	8"	2
NP500X1000	10"	2
NP500X1200	12"	2
6"	Length	Std. Pkg.
NP600XCL	CLOSE	4
NP600X600	6"	4
NP600X800	8"	2
NP600X1000	10"	2
NP600X1200	12"	2



Aluminum Conduit Couplings

	Size	Std. Pkg.
COUP50AL	1/2"	100
COUP75AL	3/4"	50
COUP100AL	1"	30
COUP125AL	1-1/4"	25
COUP150AL	1-1/2"	25
COUP200AL	2"	20
COUP250AL	2-1/2"	24
COUP300AL	3"	16
COUP350AL	3-1/2"	10
COUP400AL	4"	10



Aluminum Conduit Elbows

90 Degree	45 Degree	Size	Std. Pkg.
SWEEP50AL	SWEEP50-45AL	1/2"	50
SWEEP75AL	SWEEP75-45AL	3/4"	50
SWEEP100AL	SWEEP100-45AL	1"	25
SWEEP125AL	SWEEP125-45AL	1-1/4"	20
SWEEP150AL	SWEEP150-45AL	1-1/2"	15
SWEEP200AL	SWEEP200-45AL	2"	10
SWEEP250AL	SWEEP250-45AL	2-1/2"	1
SWEEP300AL	SWEEP300-45AL	3"	1
SWEEP400AL	SWEEP400-45AL	4"	1



Aluminum Conduit Nipples

1/2"

	Length	Std. Pkg.
NP50XCLAL	CLOSE	25
NP50X200AL	2"	25
NP50X250AL	2-1/2"	25
NP50X300AL	3"	25
NP50X400AL	4"	25
NP50X600AL	6"	25
NP50X800AL	8"	25
NP50X1000AL	10"	25
NP50X1200AL	12"	25

3/4"

	Length	Std. Pkg.
NP75XCLAL	CLOSE	25
NP75X200AL	2"	25
NP75X250AL	2-1/2"	25
NP75X300AL	3"	25
NP75X400AL	4"	25
NP75X600AL	6"	25
NP75X800AL	8"	25
NP75X1000AL	10"	25
NP75X1200AL	12"	25

1"

	Length	Std. Pkg.
NP100XCLAL	CLOSE	25
NP100X200AL	2"	25
NP100X250AL	2-1/2"	25
NP100X300AL	3"	25
NP100X400AL	4"	25
NP100X600AL	6"	25
NP100X800AL	8"	25
NP100X1000AL	10"	25
NP100X1200AL	12"	25

1-1/4"

	Length	Std. Pkg.
NP125XCLAL	CLOSE	25
NP125X200AL	2"	25
NP125X250AL	2-1/2"	25
NP125X300AL	3"	25
NP125X400AL	4"	25
NP125X600AL	6"	25
NP125X800AL	8"	12
NP125X1000AL	10"	12
NP125X1200AL	12"	12

1-1/2"

	Length	Std. Pkg.
NP150XCLAL	CLOSE	25
NP150X200AL	2"	25
NP150X250AL	2-1/2"	25
NP150X300AL	3"	25
NP150X400AL	4"	25
NP150X600AL	6"	25
NP150X800AL	8"	12
NP150X1000AL	10"	12
NP150X1200AL	12"	12



Aluminum Conduit Nipples

2"	Length	Std. Pkg.
NP200XCLAL	CLOSE	25
NP200X250AL	2-1/2"	25
NP200X300AL	3"	25
NP200X400AL	4"	25
NP200X600AL	6"	25
NP200X800AL	8"	12
NP200X1000AL	10"	12
NP200X1200AL	12"	12

2-1/2"	Length	Std. Pkg.
NP250XCLAL	CLOSE	12
NP250X300AL	3"	12
NP250X400AL	4"	12
NP250X600AL	6"	12
NP250X800AL	8"	5
NP250X1000AL	10"	5
NP250X1200AL	12"	5

3"	Length	Std. Pkg.
NP300XCLAL	CLOSE	12
NP300X400AL	4"	10
NP300X600AL	6"	10
NP300X800AL	8"	10
NP300X1000AL	10"	5
NP300X1200AL	12"	5

3-1/2"	Length	Std. Pkg.
NP350XCLAL	CLOSE	10
NP350X400AL	4"	6
NP350X600AL	6"	5
NP350X800AL	8"	3
NP350X1000AL	10"	3
NP350X1200AL	12"	3

4"	Length	Std. Pkg.
NP400XCLAL	CLOSE	10
NP400X400AL	4"	10
NP400X600AL	6"	10
NP400X800AL	8"	5
NP400X1000AL	10"	5
NP400X1200AL	12	5



Stainless Steel

Conduit

Type 304SS	Type 316SS	Size	Std. Length
CND50-304	CND50-316	1/2"	10 FEET
CND75-304	CND75-316	3/4"	10 FEET
CND100-304	CND100-316	1"	10 FEET
CND125-304	CND125-316	1-1/4"	10 FEET
CND150-304	CND150-316	1-1/2"	10 FEET
CND200-304	CND200-316	2"	10 FEET
CND250-304	CND250-316	2-1/2"	10 FEET
CND300-304	CND300-316	3"	10 FEET
CND350-304	CND350-316	3-1/2"	10 FEET
CND400-304	CND400-316	4"	10 FEET




Conduit Couplings

Type 304SS	Type 316SS	Size	Std. Pkg.
CPL50-304	CPL50-316	1/2"	1
CPL75-304	CPL75-316	3/4"	1
CPL100-304	CPL100-316	1"	1
CPL125-304	CPL125-316	1-1/4"	1
CPL150-304	CPL150-316	1-1/2"	1
CPL200-304	CPL200-316	2"	1
CPL250-304	CPL250-316	2-1/2"	1
CPL300-304	CPL300-316	3"	1
CPL350-304	CPL350-316	3-1/2"	1
CPL400-304	CPL400-316	4"	1



Conduit Elbows – 90°

Type 304SS	Type 316SS	Size	Std. Pkg.
ELB50-304	ELB50-316	1/2"	1
ELB75-304	ELB75-316	3/4"	1
ELB100-304	ELB100-316	1"	1
ELB125-304	ELB125-316	1-1/4"	1
ELB150-304	ELB150-316	1-1/2"	1
ELB200-304	ELB200-316	2"	1
ELB250-304	ELB250-316	2-1/2"	1
ELB300-304	ELB300-316	3"	1
ELB350-304	ELB350-316	3-1/2"	1
ELB400-304	ELB400-316	4"	1



Conduit Elbows – 45°

Type 304SS	Type 316SS	Size	Std. Pkg.
ELB50-45-304	ELB50-45-316	1/2"	1
ELB75-45-304	ELB75-45-316	3/4"	1
ELB100-45-304	ELB100-45-316	1"	1
ELB125-45-304	ELB125-45-316	1-1/4"	1
ELB150-45-304	ELB150-45-316	1-1/2"	1
ELB200-45-304	ELB200-45-316	2"	1
ELB250-45-304	ELB250-45-316	2-1/2"	1
ELB300-45-304	ELB300-45-316	3"	1
ELB350-45-304	ELB350-45-316	3-1/2"	1
ELB400-45-304	ELB400-45-316	4"	1



Stainless Steel

Conduit Nipples

Type 304SS	Type 316SS	Size	Std. Pkg.
NIP50X*-304	NIP50X*-316	1/2"	1
NIP75X*-304	NIP75X*-316	3/4"	1
NIP100X*-304	NIP100X*-316	1"	1
NIP125X*-304	NIP125X*-316	1-1/4"	1
NIP150X*-304	NIP150X*-316	1-1/2"	1
NIP200X*-304	NIP200X*-316	2"	1

Replace * with Required Length



Conduit Bodies c/w Cover & Gasket - Type 316SS

LB	LL	LR		Size	Std. Pkg.
7050LB	-	-		1/2"	1
7075LB	7075LL	7075LR		3/4"	1
7100LB	7100LL	7100LR		1"	1
7125LB	-	-		1-1/4"	1
7150LB	7150LL	7150LR		1-1/2"	1
7200LB	7200LL	7200LR		2"	1
7250LB	-	-		2-1/2"	1
7300LB	-	-		3"	1
7400LB	-	-		4"	1

C	T	TB	X	Size	Std. Pkg.
7050C	7050T	-	-	1/2"	1
7075C	7075T	7075TB	7075X	3/4"	1
7100C	7100T	7100TB	7100X	1"	1
7125C	7125T	7125TB	-	1-1/4"	1
7150C	7150T	7150TB	-	1-1/2"	1
7200C	7200T	7200TB	-	2"	1
-	7250T	-	-	2-1/2"	1
-	7300T	-	-	3"	1
-	7400T	-	-	4"	1



Hubs - Type 316SS

Standard	Grounding	Size	Std. Pkg.
7050HUB	7050G-HUB	1/2"	1
7075HUB	7075G-HUB	3/4"	1
7100HUB	7100G-HUB	1"	1
7125HUB	7125G-HUB	1-1/4"	1
7150HUB	7150G-HUB	1-1/2"	1
7200HUB	7200G-HUB	2"	1
7250HUB	7250G-HUB	2-1/2"	1
7300HUB	7300G-HUB	3"	1
7400HUB	7400G-HUB	4"	1



Stainless Steel

Conduit Straps - Type 316SS

One Hole	Two Hole	Size	Std. Pkg.
-	3038-2	3/8"	1
3050	3050-2	1/2"	1
3075	3075-2	3/4"	1
3100	3100-2	1"	1
3125	3125-2	1-1/4"	1
3150	3150-2	1-1/2"	1
3200	3200-2	2"	1
3250	3250-2	2-1/2"	1
3300	3300-2	3"	1
3350	3350-2	3-1/2"	1
3400	3400-2	4"	1



Clamp Back Spacers - Type 316SS

	Size	Std. Pkg.
CBS3050	1/2"	1
CBS3075	3/4"	1
CBS3100	1"	1
CBS3125	1-1/4"	1
CBS3150	1-1/2"	1
CBS3200	2"	1
CBS3250	2-1/2"	1
CBS3300	3"	1
CBS3350	3-1/2"	1
CBS3400	4"	1



Conduit Caps - Type 316SS

	Size	Std. Pkg.
CAP50	1/2"	1
CAP75	3/4"	1
CAP100	1"	1
CAP125	1-1/4"	1
CAP150	1-1/2"	1
CAP200	2"	1
CAP250	2-1/2"	1
CAP300	3"	1
CAP400	4"	1



Floor Flanges - Type 316SS

	Size	Std. Pkg.
FF50	1/2"	1
FF75	3/4"	1
FF100	1"	1
FF125	1-1/4"	1
FF150	1-1/2"	1
FF200	2"	1



Pulling Elbows - Type 316SS

	Size	Std. Pkg.
PE50	1/2"	1
PE75	3/4"	1
PE100	1"	1
PE150	1-1/2"	1
PE200	2"	1



Stainless Steel

Three Piece Couplings - Type 316SS

	Size	Std. Pkg.
TPC50	1/2"	1
TPC75	3/4"	1
TPC100	1"	1
TPC125	1-1/4"	1
TPC150	1-1/2"	1
TPC200	2"	1



Locknuts - Type 316SS

Standard	Grounding	Size	Std. Pkg.
8050	8050G	1/2"	1
8075	8075G	3/4"	1
8100	8100G	1"	1
8125	8125G	1-1/4"	1
8150	8150G	1-1/2"	1
8200	8200G	2"	1
8250	8250G	2-1/2"	1
8300	8300G	3"	1
8400	8400G	4"	1




Device Boxes - Type 316SS

Single Gang	Type	Hub Size	Std. Pkg.
FD75	Dead End	3/4"	1
FDA75	Back Entry	3/4"	1
FDC75	Pull Thru	3/4"	1
FDS75	2 Entry on Same Side	3/4"	1
FDCT75	T Pattern	3/4"	1
FDX75	X Pattern	3/4"	1
Double Gang	Type	Hub Size	Std. Pkg.
FDDX75	X Pattern	3/4"	1



Device Box Covers - Type 316SS

Single Gang	Type	Std. Pkg.
7000BC	Blank (Cast)	1
7000BF	Blank (Formed)	1
7000RF	Duplex Receptacle (Formed)	1
7000SF	Switch (Formed)	1
Double Gang	Type	Std. Pkg.
7000BC2	Blank (Cast)	1
7000BF2	Blank (Formed)	1

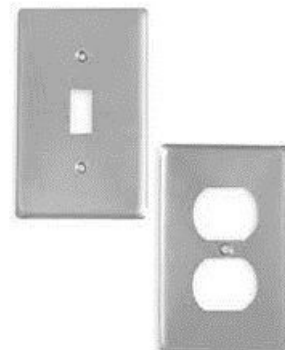

Stainless Steel

Conduit Hangers - Type 316SS

	Size	Std. Pkg.
6050	1/2"	1
6075	3/4"	1
6100	1"	1
6215	1-1/4"	1
6150	1-1/2"	1
6200	2"	1
6250	2-1/2"	1
6300	3"	1
6400	4"	1



Beam Clamps - Type 316SS

2000 Series		Size	Std. Pkg.
2001		1/4"	1
2003		3/8"	1
2004		1/2"	1
2100 Series		Size	Std. Pkg.
2103		3/8"	1
2104		1/2"	1
Junior Top		Size	Std. Pkg.
JTB375		3/8"	1
JTB500		1/2"	1
Right Angle		Size	Std. Pkg.
1050		1/2"	1
1075		3/4"	1
1100		1"	1
1125		1-1/4"	1
1150		1-1/2"	1
1200		2"	1
1250		2-1/2"	1
1300		3"	1
1350		3-1/2"	1
1400		4"	1
1600		6"	1
Parallel		Size	Std. Pkg.
4075		3/4"	1
4100		1"	1



Sealtite Connectors - Type 316SS

Straight	90 Degree	45 Degree	Size	Std. Pkg.
LT50SS	LT9050SS	LT4550SS	1/2"	1
LT75SS	LT9075SS	LT4575SS	3/4"	1
LT100SS	LT90100SS	LT45100SS	1"	1
LT125SS	LT90125SS	LT45125SS	1-1/4"	1
LT150SS	LT90150SS	LT45150SS	1-1/2"	1
LT200SS	LT90200SS	LT45200SS	2"	1



Stainless Steel

Threaded Plugs - Type 316SS

Hex Head	Socket	Size	Std. Pkg.
-	7025SP	1/4"	1
7038P	7038SP	3/8"	1
7050P	7050SP	1/2"	1
7075P	7075SP	3/4"	1
7100P	7100SP	1"	1
7125P	7125SP	1-1/4"	1
7150P	7150SP	1-1/2"	1
7200P	7200SP	2"	1
7250P	-	2-1/2"	1
7300P	-	3"	1
7400P	-	4"	1



Threaded Reducing Bushings - Type 316SS

Hex Head	Face (Flush)	Size	Std. Pkg.
7500-RB50X25	-	1/2" X 1/4"	1
7500-RB50X38	-	1/2" X 3/8"	
7500-RB75X25	-	3/4" X 1/4"	1
7500-RB75X38	-	3/4" X 3/8"	
7500-RB75X50	7500-FB75X50	3/4" X 1/2"	1
7500-RB100X38	-	1" X 3/8"	
7500-RB100X50	7500-FB100X50	1" X 1/2"	1
7500-RB100X75	7500-FB100X75	1" X 3/4"	
7500-RB125X50	7500-FB125X50	1-1/4" X 1/2"	1
7500-RB125X75	7500-FB125X75	1-1/4" X 3/4"	
7500-RB125X100	7500-FB125X100	1-1/4" X 1"	1
7500-RB150X50	7500-FB150X50	1-1/2" X 1/2"	
7500-RB150X75	7500-FB150X75	1-1/2" X 3/4"	1
7500-RB150X100	7500-FB150X100	1-1/2" X 1"	
7500-RB150X125	7500-FB150X125	1-1/2" X 1-1/4"	1
7500-RB200X50	7500-FB200X50	2" X 1/2"	
7500-RB200X75	7500-FB200X75	2" X 3/4"	1
7500-RB200X100	7500-FB200X100	2" X 1"	
7500-RB200X125	7500-FB200X125	2" X 1-1/4"	1
7500-RB200X150	7500-FB200X150	2" X 1-1/2"	
7500-RB250X50	-	2-1/2" X 1/2"	1
7500-RB250X75	-	2-1/2" X 3/4"	
7500-RB250X100	-	2-1/2" X 1"	1
7500-RB250X125	-	2-1/2" X 1-1/4"	
7500-RB250X150	-	2-1/2" X 1-1/2"	1
7500-RB250X200	-	2-1/2" X 2"	
7500-RB300X100	-	3" X 1"	1
7500-RB300X125	-	3" X 1-1/4"	
7500-RB300X150	-	3" X 1-1/2"	1
7500-RB300X200	-	3" X 2"	
7500-RB300X250	-	3" X 2-1/2"	1
7500-RB400X125	-	4" X 1-1/4"	
7500-RB400X150	-	4" X 1-1/2"	1
7500-RB400X200	-	4" X 2"	
7500-RB400X250	-	4" X 2-1/2"	1
7500-RB400X300	-	4" X 3"	



Stainless Steel

Hazardous Location EYS Fittings - Type 316SS

	Size	Std. Pkg.
EYS75	3/4"	1
EYS100	1"	1



Hazardous Location Junction Boxes - Type 316SS

	Configuration	Hub Size	Std. Pkg.
GUAC75SS	C	3/4"	1
GUAC100SS	C	1"	1
GUAT75SS	T	3/4"	1
GUAT100SS	T	1"	1
GUAX75SS	X	3/4"	1
GUAX100SS	X	1"	1
GUAB75SS	LB	3/4"	1
GUAB100SS	LB	1"	1
GUAL75SS	LL	3/4"	1
GUAL100SS	LL	1"	1



Insulated Bushings

	Size	Std. Pkg.
B50	1/2"	1
B75	3/4"	1
B100	1"	1
B125	1-1/4"	1
B150	1-1/2"	1
B200	2"	1



Grounding Insulated Bushings

	Wire Range	Size	Std. Pkg.
GB50S	4-14	1/2"	1
GB75S	4-14	3/4"	1
GB100S	4-14	1"	1
GB125S	4-14	1-1/4"	1
GB150S	4-14	1-1/2"	1
GB200S	4-14	2"	1
GB50L	3/0-6	1/2"	1
GB75L	3/0-6	3/4"	1
GB100L	3/0-6	1"	1
GB125L	3/0-6	1-1/4"	1
GB150L	3/0-6	1-1/2"	1



Stainless Steel

Strain Relief Grips - Type 316SS

Cord Grip	Cord Grip with Mesh	Cable Range (inches)	Std. Pkg.
1/2"			
CG50-125188	CGM50-125188	.125 - .188	1
CG50-188250	CGM50-188250	.188 - .250	1
CG50-250313	CGM50-250313	.250 - .313	1
CG50-313375	CGM50-313375	.313 - .375	1
CG50-375438	CGM50-375438	.375 - .438	1
CG50-438500	CGM50-438500	.438 - .500	1
CG50-500563	CGM50-500563	.500 - .563	1
CG50-563610	CGM50-563610	.536 - .610	1

3/4"			
CG75-188250	CGM75-188250	.188 - .250	1
CG75-250313	CGM75-250313	.250 - .313	1
CG75-313375	CGM75-313375	.313 - .375	1
CG75-375438	CGM75-375438	.375 - .438	1
CG75-438500	CGM75-438500	.438 - .500	1
CG75-500563	CGM75-500563	.500 - .563	1
CG75-563625	CGM75-563625	.563 - .625	1
CG75-625688	CGM75-625688	.625 - .688	1
CG75-688750	CGM75-688750	.688 - .750	1
CG75-750810	CGM75-750810	.750 - .810	1

1"			
CG100-375438	CGM100-375438	.375 - .438	1
CG100-438500	CGM100-438500	.438 - .500	1
CG100-500563	CGM100-500563	.500 - .563	1
CG100-563625	CGM100-563625	.563 - .625	1
CG100-625688	CGM100-625688	.625 - .688	1
CG100-688750	CGM100-688750	.688 - .750	1
CG100-750813	CGM100-750813	.750 - .813	1

Support Grips - Single Eye, Split Mesh, Rod Closing

	Cable Range (inches)	Approx. Break Strength (lbs.)	Std. Pkg.
SPSR050US	.50 - .62	1050	1
SPSR062US	.63 - .74	2050	1
SPSR075US	.75 - .99	2050	1
SPSR100US	1.00 - 1.24	2650	1
SPSR125US	1.25 - 1.49	4500	1
SPSR150US	1.50 - 1.74	4500	1
SPSR175US	1.75 - 1.99	6000	1
SPSR200US	2.00 - 2.49	8950	1
SPSR250US	2.50 - 2.99	7750	1
SPSR300US	3.00 - 3.49	8500	1



Stainless Steel

U-Bolts

Standard	Figure 137 Style	Size	Std. Pkg.
0050	0050-137	1/2"	1
0075	0075-137	3/4"	1
0100	0100-137	1"	1
0125	0125-137	1-1/4"	1
0150	0150-137	1-1/2"	1
0200	0200-137	2"	1
0250	0250-137	2-1/2"	1
0300	0300-137	3"	1
0350	0350-137	3-1/2"	1
0400	0400-137	4"	1
0500	-	5"	1
0600	-	6"	1
0800	-	8"	1
01000	-	10"	1
01200	-	12"	1
01400	-	14"	1
01600	-	16"	1
01800	-	18"	1
02000	-	20"	1

U-Bolt Plates also Available



Strut Channel - 1-5/8 x 1-5/8

Type 304SS	Type	Std. Pkg.
PS200SS304	Solid	10 Feet
PS200SS304EH	With Elongated Holes	10 Feet
Type 316SS	Type	
PS200SS316	Solid	10 Feet
PS200SS316EH	With Elongated Holes	10 Feet



Post Bases

Type	Type	Std. Pkg.
5990PB1	Single Post Base - Square	1
5990PB2	Single Post Base - 45° Offset	1
5990PB3	Single Post Base - Flush Mount	1
5990PB4	Double Post Base - Square	1
5990PB5	Single Post Base - Narrow Foot	1



Spring Nuts

	Size	Std. Pkg.
5911	1/4"	1
5912	5/16"	1
5913	3/8"	1
5914	1/2"	1
5915	5/8"	1



Stainless Steel

2 Piece Strut Straps - Type 316SS

	Size	Std. Pkg.
5050	1/2"	1
5075	3/4"	1
5100	1"	1
5125	1-1/4"	1
5150	1-1/2"	1
5200	2"	1
5250	2-1/2"	1
5300	3"	1
5350	3-1/2"	1
5400	4"	1
5500	5"	1
5600	6"	1
5800	8"	1



Strut Fittings and Accessories

Right Angle Beam Clamps

	Size	Std. Pkg.
5990	1-5/8" x 1-5/8"	1
5990L	1-5/8" x 3-1/4"	1



Square Washer

	Size	Std. Pkg.
5970-1/4	1/4"	1
5970-3/8	3/8"	1
5970-1/2	1/2"	1
5970-5/8	5/8"	1
5970-3/4	3/4"	1



90 Degree Angle Fittings

	Type	Std. Pkg.
5971	2 Hole	1
5974	3 Hole	1
5973	4 Hole	1



Flat Fittings

	Type	Std. Pkg.
5963	3 Hole 90	1
5964	4 Hole 90	1
5965	Cross Plate	1
5969	4 Hole Splice	1
5966	Tee Plate	1




Other Stainless Steel Strut Fitting Available - Please Call

Strut Fittings

Spring Nuts - Regular Spring

	Size	Std. Pkg.
C6-1420RS	1/4" - 20	100
C7RS	5/16" - 18	100
C8RS	3/8" - 16	100
C10RS	1/2" - 13	100
C12RS	5/8" - 11	100
C13RS	3/4" - 10	100



Stainless Steel, Short, Long or No Spring versions are available

U-Bolts

	Size	Std. Pkg.
UB50	1/2"	1
UB75	3/4"	1
UB100	1"	1
UB125	1-1/4"	1
UB150	1-1/2"	1
UB200	2"	1
UB250	2-1/2"	1
UB300	3"	1
UB350	3-1/2"	1
UB400	4"	1



Flat Plate Fittings

	Type	Std. Pkg.
C601	2 Hole Splice Plate	50
C602	3 Hole Splice Plate	25
C723	4 Hole Splice Plate	25
C718	3 Hole Flat Angle Plate	50
C719	4 Hole Flat Angle Plate	20
C714	T Plate	25
C712	Cross Plate	10
C619*	Square Washer	10



Splice Plates


*Specify Hole Size



C718




C719



C714



C712



C619

90 Degree Fittings

	Type	Std. Pkg.
C603	2 Hole End Angle	50
C604	2 Hole Corner Angle	50
C605	3 Hole Corner Angle	25
C607	4 Hole Corner Angle	25



C603



C604



C605



C607

Strut Fittings

Angle Fittings

	Type	Std. Pkg.
C793*	4 Hole Closed Angle	25
C781*	4 Hole Open Angle	25
C624*	2 Hole Closed Angle	25
C633*	2 Hole Open Angle	25
PS9402	2 Hole Hinge Connector	1
PS9403	3 Hole Hinge Connector	1
PS9404	4 Hole Hinge Connector	1



C793

*Specify Angle




C781




C624




C633



PS9402




PS9403



PS9404

U Support Z Fittings & Joiners

	Type	Std. Pkg.
C613	U Support	15
C611	Z Fitting - 1-5/8" Channel	15
C612	Z Fitting - 1" Channel	25
C631	2 Hole Strut Joiner	25
C616	4 Hole Strut Joiner	10
C649A*	Strut Joiner - Stamped Steel	25



C613

*Includes Flat Head Machine Screws and 4 Hole Splice Plate Nut



C611



C612



C631




C616




C649A

Post Bases


	Type	Std. Pkg.
C3033	Single Post Base - Offset	5
C3033SQ	Single Post Base - Square	5
C3064	Double Post Base - Offset	5
C3064SQ	Double Post Base - Square	5




C3033



C3033SQ



C3064



C3064SQ

Strut Fittings

Beam Clamps

	Type	Load Rating / Lbs.	Std. Pkg.
C684S	I Beam Clamp	500	10
C685S	Beam Clamp	450	10
C686	Beam Clamp	600 with 12 ga. Channel 500 with 14 ga. Channel	10
C855S	Angular I Beam Clamp	500	15
C2651	U-Bolt Style Clamp - Double Strut	1000	25
C2652	U-Bolt Style Clamp - Single Strut	1000	25
C907S	I Beam Clamp - 1/4" Stock Thickness	450	25
C998	I Beam Clamp - 3/8" Stock Thickness	900	25
C2622	Beam Clamp	300	25
C2654	Column Bracket	800	25
C858*	C Clamp - 7/8" Jaw Opening	Varies with rod size - call	1
C865*	C Clamp - 1-21/32" Jaw Opening	Varies with rod size - call	1
PS86*	C Clamp	Varies with rod size - call	1
PS93*	Universal Top or Bottom C Clamp 1-1/4" Jaw Opening	Varies with rod size - call	1
PS94*	Wide Throat Top C Clamp 1-5/16" Jaw Opening	Varies with rod size - call	1

***Specify Rod Size"**



C684S



C685S



C686



C855S



C2651



C2652



C907S / C998



C2622



C2654




C858




C865



PS86



PS93



PS94


Strut Fittings

Brackets	Type	Std. Pkg.
C3373	Universal Corner Connector	10
C651*	Reversible Channel Bracket – 1-5/8 x 1-5/8	1
C809*	Double Channel Bracket – 1-5/8 x 3-1/4	1
C3282*	Cable Tray Strut Bracket – 1 x 1-5/8	1
C732*	Shelf Bracket	1


*Specify Length Required




C3373




C651



C809



C3282



C732


Trolleys	Type	Std. Pkg.
P2749	2 Wheel Trolley with Eye-Bolt	1
P2751	4 Wheel Trolley with Eye-Bolt	1
FJ103	2 Wheel Flat Bar Trolley	1
FJ108	4 Wheel Flat Bar Trolley	1




P2749



P2751



FJ103




FJ108

Miscellaneous Fittings		Std. Pkg.
C2625	Wiring Stud Nut - 1/2" Thread	25
C2636	Fixture Stud Nut - 1/4" Thread	200
C2631	Swing Gate Fixture Hanger	10
C655	Hammer-In Steel End Cap	100
PS6153-2GY	Rubber End Cap - Grey	10
PS6154-2GY	Plastic Profile End Cap - Grey	10
PS707P	Plastic Closure Strip - Grey	10




C2625



C2636




C655




C2631



PS6153-2GY



PS6154

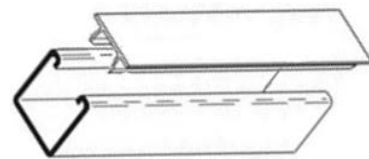

PS707P

Strut Fittings

EMT Pipe Straps - 2 Piece

	Size	Std. Pkg.
C1025	3/8"	100
C1026	1/2"	100
C1027	3/4"	100
C1028	1"	100
C1029	1-1/4"	50
C1030	1-1/2"	50
C1031	2"	50
C1132*	2-1/2"	50
C1133*	3"	50
C1134*	3-1/2"	25
C1135*	4"	25

* Universal both EMT and Rigid

Rigid Pipe Straps - 2 Piece

Steel	Size	Std. Pkg.
C1125	3/8"	100
C1126	1/2"	100
C1127	3/4"	100
C1128	1"	100
C1129	1-1/4"	50
C1130	1-1/2"	50
C1131	2"	50
C1132	2-1/2"	50
C1133	3"	50
C1134	3-1/2"	25
C1135	4"	25
C1137	5"	25
C1138	6"	25
C1140	8"	25
C1100-10	10"	25
C1100-12	12"	25

Available in Stainless steel - see Page 72

Available in Hot Dipped Galvanized, Please Call

Aluminum

	Size	Std. Pkg.
C1126AL	1/2"	100
C1127AL	3/4"	100
C1128AL	1"	100
C1129AL	1-1/4"	50
C1130AL	1-1/2"	50
C1131AL	2"	50
C1132AL	2-1/2"	50
C1133AL	3"	50
C1134AL	3-1/2"	25
C1135AL	4"	25
C1137AL	5"	25



Strut Fittings


Adjustable "P" Clamps

Steel	Stainless Steel	Range (inches)	Std. Pkg.
C55	C55SS	.050 - .550	100
C81	C81SS	.250 - .840	100
C110	C110SS	.810 - 1.100	100
C135	C135SS	.850 - 1.350	100
C175	C175SS	1.250 - 1.750	50
C205	C205SS	1.550 - 2.050	50
C250	C250SS	2.000 - 2.500	50
C300	C300SS	2.500 - 3.000	50
C325	C325SS	2.750 - 3.325	50
C375	C375SS	3.250 - 3.750	25
C425	C425SS	3.750 - 4.250	25
C475	C475SS	4.250 - 4.750	25




Many other strut items available, including:


Cush-A-Clamps for Pipes, Copper or Steel Tubing



Porc-A-Clamps for Cable



Winged Fittings



Please call us with all your strut fitting requirements

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
0050-137	71	1193/20	30	1332	38	139	50
0050	71	1193Q/20	30	1333	38	139S	36
0075-137	71	1194/20	30	133S	50	139S	50
0075	71	1194Q/20	30	133x126CH	2	13CS	58
0100-137	71	1194S/20	30	133x270CH	15	1400	67
0100	71	1195/20	30	133x272CH	15	140x303	2
01000	71	1195Q/20	30	133x280CH	15	140x401	2
01200	71	1195S/20	30	133x305CH	3	140x402	2
0125-137	71	1196/20	30	133x320CH	5	140x404	3
0125	71	1196Q/20	30	133x324CH	3	140x410	3
01400	71	1196S/20	30	133x360CH	4	140x801	2
0150-137	71	11CS	58	133x552CH	3	141	50
0150	71	1200	67	133x554CH	3	141S	36/5
01600	71	1206	47	133x555CH	3	141x201	12
01800	71	1207	47	133x558CH	14	141x202	12
0200-137	71	1208	47	133x559CH	14	141x203	13
0200	71	1209	47	133x563CH	14	141x205	12
02000	71	1210	47	133x564CH	14	141x300	1
0250-137	71	1211	47	133x565CH	5	141x301	12
0250	71	1212	47	133x575CH	4	141x400	1
0300-137	71	1213	47	133x585CH	4	141x403	1
0300	71	1214	47	133x587CH	4	142S	36
0350-137	71	1215	47	133x588CH	4	142x121	1
0350	71	1216	47	133x595CH	4	142x122	14
0400-137	71	1217	47	133x596CH	5	142x123	12
400	71	1234 series	35	133x597CH	5	142x552	1
500	71	1241/20	30	133x598CH	5	142x553	12
500	71	1241Q/20	30	133x611CH	14	142x570	2
800	71	1241S/20	30	133x953CH	4	142x572	1
1002	25	1242/20	30	133x955CH	4	142x574	13
1005	49	1242Q/20	30	134	50	142x970	2
1006	49	1242S/20	30	1343548	2	143S	36
1022	49	1244/20	30	1343553	3	143x123	2
1023	49	1244Q/20	30	1343555	3	143x124	2
1024	49	1250 (ss)	67	1343570	2	143x126	2
1025	49	1250	38	1343572	2	143x306	3
1026	49	1251	38	1343580	2	143x552	3
1027	49	12CS	58	1343582	3	143x553	3
1028	49	1300	67	1343585	4	143x554	3
1029	49	1313	53	1343588	4	143x555	3
1030	49	1314	53	1343595	4	143x559	14
1031	49	1315	53	1343596	5	143x561	14
1050	67	1316	53	1343597	5	143x563	14
1075	67	132	50	134S	50	143x587	4
10B	35	1320	53	135	50	143x590	13
10BG	35	1321	53	1350	67	143x953	4
10BR	35	1326	38	135S	50	143x955	3
10CS	58	1327	38	135x601CH	5	144S	36
1100	67	1328	38	135x605CH	6	144x122	14
1121	26	1329	38	135x701CH	5	144x401	3
1125	67	132S	50	135x702CH	6	144x551	4
1150	67	132x122CH	13	135x703CH	6	144x553	14
1185/20	30	132x422CH	13	135x704CH	6	144x557	4
1185Q/20	30	132x474CH	13	135x705CH	6	144x560	3
1185S/20	30	132x570CH	2	135x706CH	6	144x569	14
1186/20	30	132x572CH	1	135x707CH	6	144x575	14
1186Q/20	30	132x574CH	13	135x708CH	6	144x614	15
1186S/20	30	132x579CH	12	136	50	1453401	6
1188/20	30	132x580CH	2	136S	50	145S	36
1188Q/20	30	132x670CH	12	137	50	145x129	5
1188S/20	30	132x970CH	2	137S	50	145x282	15
1189/20	30	132x972CH	2	138	50	145x301	5
1189Q/20	30	133	50	138S	36	145x408	5
1189S/20	30	1331348CH	5	138S	50	145x411	5

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
145x552	4	1606H	17	2134S	50	35A	35
145x573	14	1606MCJ	17	2135S	50	36A	35
145x579	4	1606SC	17	2136S	50	3819	26
145x583	14	1606ST	17	2137S	50	3F	51
145x586	5	1606STD	17	2138S	36	400	49
145x592	5	1608DJ	17	2138S	50	401	49
145x594	4	1608H	17	2139S	36	402	49
145x599	15	1608MCJ	17	2139S	50	403	49
145x606	14	1608SC	17	2141S	36	404	49
145x610	15	1608ST	17	2141S	50	405	49
145x613	15	1608STD	17	2142S	36	406	49
145x615	15	1612DJ	17	2143S	36	407	49
145x986	5	1612H	17	2144S	36	4075	67
145x992	5	1612MCJ	17	2145	25	408	49
146S	36	1612SC	17	2145S	36	409	49
147S	36	1612ST	17	2146S	36	4100	67
148	50	1612STD	17	2147S	36	4247	25
148S	36/50	16CS	58	2148S	36	4252	25
14CS	58	1702SC	18	2148S	50	4311	25
1502DJ	16	1702STD	18	2150S	50	4F	51
1502H	16	1703SC	18	2152S	50	500AH	24
1502MCJ	16	1703STD	18	21BIZ4L	46	500AN	24
1502SC	16	1704SC	18	22BIZ4L	46	500H	24
1502ST	16	1704STD	18	23BIZ4L	46	500N	24
1502STD	16	1705SC	18	24BIZ4L	46	5050	72
1504DJ	16	1705STD	18	25BIZ4L	46	5075	72
1504H	16	1706SC	18	26BIOL	46	5100	72
1504MCJ	16	1706STD	18	26BIZOL	46	511B	24
1504SC	16	1707SC	18	2711	25	511BG	24
1504ST	16	1707STD	18	27BIOL	46	511BO	24
1504STD	16	1708SC	18	27BIZOL	46	511BOX	24
1506DJ	16	1708STD	18	28BIOL	46	5125	72
1506H	16	1709SC	18	28BIZOL	46	5126	25
1506MCJ	16	1709STD	18	29BIOL	46	5150	72
1506SC	16	170C	38	29BIZOL	46	5175	25
1506ST	16	1710SC	18	2F	51	5200	72
1506STD	16	1710STD	18	3038-2	65	522B12	23
1508DJ	16	1711SC	18	3050-2	65	522B14	23
1508H	16	1711STD	18	3050	65	522D28	23
1508MCJ	16	1712SC	18	3075-2	65	522F28	23
1508SC	16	1712STD	18	3075	65	5243	25
1508ST	16	171C	38	30BI40L	46	5250	72
1508STD	16	172C	38	3100-2	65	5300	72
1512DJ	16	173C	38	3100	65	531SWH	24
1512H	16	17CS	58	3125-2	65	531SWHO	24
1512MCJ	16	18CS	58	3125	65	531SWHOX	24
1512SC	16	19CS	58	3150-2	65	531SWN	24
1512ST	16	1F	51	3150	65	532SWH	24
1512STD	16	2001	67	31BI40L	46	532SWHO	24
15CS	58	2003	67	3200-2	65	532SWHOX	24
1600	67	2015-3A	24	3200	65	532SWN	24
1602DJ	17	2015-3B	24	3250-2	65	5350	72
1602H	17	2015-3C	24	3250	65	5400	72
1602MCJ	17	2015-4C	24	3300-2	65	5415	25
1602SC	17	2074	26	3300	65	5416	25
1602ST	17	20BIZ4L	46	3350-2	65	5500	72
1602STD	17	2103	67	3350	65	559600	24
1604DJ	17	2104 (SS)	67	3400-2	65	559620	24
1604H	17	2104	26	3400	65	5600	72
1604MCJ	17	2117	25	3451	26	571DWH	24
1604SC	17	2132	25	3455	26	571DWHO	24
1604ST	17	2132S	50	3456	26	571DWHOX	24
1604STD	17	2133S	50	3459	26	571DWN	24
1606DJ	17	2134	25	34B	35	572DWH	24

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
572DWHO	24	7000RF	66	716P	47	9002	25
572DWHOX	24	7000SF	66	717P	47	901	50
572DWN	24	7025SP	68	7200C	64	902	50
5800	72	7038P	68	7200G-HUB	64	903	50
5898	25	7038SP	68	7200HUB	64	904	50
5899	25	7050C	64	7200LB	64	905	50
5900	25	7050G-HUB	64	7200LL	64	906	50
5901	25	7050HUB	64	7200LR	64	907	50
5902	25	7050LB	64	7200P	68	908	50
5903	25	7050P	68	7200SP	68	909	50
5904	25	7050SP	68	7200T	64	90Z	49
5905	25	7050T	64	7200TB	64	91	49
5906	25	705X	47	72180	22	91Z	49
5911	71	706P	47	72181	22	92	49
5912	71	7075C	64	7250G-HUB	64	9211	25
5913	71	7075G-HUB	64	7250HUB	64	9212	25
5914	71	7075HUB	64	7250LB	64	9213	25
5915	71	7075LB	64	7250P	68	9214	25
5963	72	7075LL	64	7250T	64	92161	22
5964	72	7075LR	64	7300G-HUB	64	92180	22
5965	72	7075P	68	7300HUB	64	92181	22
5966	72	7075SP	68	7300LB	64	92Z	49
5969	72	7075T	64	7300P	68	93	49
5970-1/2	72	7075TB	64	7300T	64	93121	22
5970-1/4	72	7075X	64	73122	22	93141	22
5970-3/4	72	707P	47	73142	22	93161	22
5970-3/8	72	708P	47	73161	22	93180	22
5970-5/8	72	709P	47	73181	22	93181	22
5971	72	7100C	64	7400G-HUB	64	93Z	49
5974	72	7100G-HUB	64	7400HUB	64	94	49
5990	72	7100HUB	64	7400LB	64	94161	22
5990L	72	7100LB	64	7400P	68	94181	22
5990PB1	71	7100LL	64	7400T	64	94Z	49
5990PB2	71	7100LR	64	74122	22	95	49
5990PB3	71	7100P	68	74142	22	95181	22
5990PB4	71	7100SP	68	74161	22	95Z	49
5990PB5	71	7100T	64	74162	22	96	49
5F	51	7100TB	64	74181	22	96Z	49
6050	67	7100X	64	7500 series	68	97	49
6075	67	710182	22	75181	22	97Z	49
6100	67	710P	47	76162	22	98	49
6150	67	711P	47	77182	22	985GP series	19
620	58	7125C	64	78162	22	98Z	49
6200	67	7125G-HUB	64	8050	66	99	49
6215	67	7125HUB	64	8050G	66	995	49
625	58	7125LB	64	8075	66	996	49
6250	67	7125P	68	8075G	66	99Z	49
627	58	7125SP	68	8100	66	ABBIT series	29
6300	67	7125T	64	8100G	66	ABPTM series	29
632DA	23	7125TB	64	8125	66	ACBR series	28
632DC3A	23	712P	47	8125G	66	AESC series	28
632S	23	713P	47	8150	66	AL1/0	35
632SC3	23	714P	47	8150G	66	AL250	35
635S	23	7150C	64	8200	66	AL3/0	35
6400	67	7150G-HUB	64	8200G	66	AL4	35
642S	23	7150HUB	64	8250	66	AMT1003DRE	26
670ARZ series	20	7150LB	64	8250G	66	AMT1003RE	26
671RZ series	20	7150LL	64	8300	66	AMT1006RE	26
672RZ series	20	7150LR	64	8300G	66	AWCSM series	28
6F	51	7150P	68	8400	66	B100	69
7000BC	66	7150SP	68	8400G	66	B125	69
7000BC2	66	7150T	64	885RZ series	19	B150	69
7000BF	66	7150TB	64	90	49	B200	69
7000BF2	66	715P	47	900	50	B50	69

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
B75	69	C2654	75	C61	62	CH132x	15
BDSR series	29	C27F7	56	C611	74	CH1331	11
BFPB series	9	C27Z	62	C612	74	CH1332	11
C1025	77	C28Z	62	C613	74	CH133x	15
C1026	77	C29Z	62	C616	74	CH1343	15
C1027	77	C2ACG	55	C619*	73	CH1351	15
C1028	77	C2CA	37	C624*	74	CHM series	51
C1029	77	C2CG	56	C631	74	CL2	27
C1030	77	C300	78	C633*	74	CND series	63
C1031	77	C300SS	78	C649A*	74	COUP (AL) series	42
C107F7	56	C3033	74	C65	62	COUP series	40
C10ACG	55	C3033SQ	74	C651*	76	CPL series	63
C10ATCG	37	C3064	74	C655	76	CSALT series	61
C10CG	56	C3064SQ	74	C66	62	CT	27
C10RS	73	C30Z	62	C67F7	56	CW series	54-55
C110	78	C31Z	62	C68	62	CW15xx	16
C1100-10	77	C32	62	C684S	75	CW16xx	17
C1100-12	77	C325	78	C685S	75	D41SN028	23
C110SS	78	C325SS	78	C686	75	DL24HDLED	27
C1125	77	C3282*	76	C6ACG	55	DL24P	27
C1126	77	C32Z	62	C6CA	37	DL24PLED	27
C1126AL	77	C33	62	C6CG	56	DL40HDLED	27
C1127	77	C3373	76	C712	73	DL40P	27
C1127AL	77	C34	62	C714	73	DL40PLED	27
C1128	77	C35Z	62	C718	73	DL60HDLED	27
C1128AL	77	C36Z	62	C719	73	DL60P	27
C1129	77	C375	78	C723	73	DL60PLED	27
C1129AL	77	C375SS	78	C732*	76	DLFAN	27
C1130	77	C37F7	56	C77F7	56	E35	51
C1130AL	77	C37Z	62	C781*	74	E36	51
C1131	77	C38Z	62	C793*	74	E37	51
C1131AL	77	C39Z	62	C7ACG	55	E38	51
C1132*	77	C3ACG	55	C7ATCG	37	ELB series	63
C1132AL	77	C3CA	37	C7CG	56	EPBAD21	7
C1133*	77	C3CG	56	C7RS	73	EPBAD24	7
C1133AL	77	C40	62	C809*	76	EPBAD42	7
C1134*	77	C40Z	62	C81	78	EPBAD45	8
C1134AL	77	C41	48	C81SS	78	EPBAD48	8
C1135*	77	C42	48	C855S	75	EPBAD71	8
C1135AL	77	C425	78	C858*	75	EPBAD74	8
C1137	77	C425SS	78	C865*	75	EPBAP42	7
C1137AL	77	C43	48	C87F7	56	EPBAP45	8
C1138	77	C44	48	C8ACG	55	EPBAP48	8
C1140	77	C45	48	C8ATCG	37	EPBAP71	8
C12RS	73	C46	48	C8CG	56	EPBAP74	8
C135	78	C475	78	C8RS	73	EPBAP81	8
C135SS	78	C475SS	78	C907S	75	EPBAP84	8
C13RS	73	C47F7	56	C97F7	56	EPBAP86	8
C175	78	C4ACG	55	C998	75	EPBCD42	7
C175SS	78	C4CA	37	C9CG	56	EPBCD45	8
C17F7	56	C4CG	56	CAP series	65	EPBCD71	8
C1ACG	55	C55	78	CBS series	65	EPBCD74	8
C1CA	37	C55SS	78	CC140x	15	EPBCP42	7
C1CG	56	C57F7	56	CC141x	15	EPBCP45	8
C205*	73	C5ACG	55	CC142x	15	EPBCP71	8
C205SS	78	C5CA	37	CC143x	15	EPBCP74	8
C250	78	C5CG	56	CC144x	15	EPBCP84	8
C250SS	78	C6-1420RS	73	CC145x	15	ERC22	38
C2622	75	C601	73	CC15xx	16	ERC23	38
C2625	76	C602	73	CC16xx	17	ERC24	38
C2631	76	C603	73	CC17xx	18	ET series	58
C2636	76	C604	73	CG (SS) series	70	EYS100	69
C2651	75	C605	73	CG series	45	EYS75	69
C2652	75	C607	73	CGM series	70	FD100	57

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
FD2-100	57	LB107F7	56	LL6CG	56	PAR series	58
FD2-50	57	LB10ACG	55	LL77F7	56	PB series	46
FD2-75	57	LB10ATCG	37	LL7ACG	55	PE series	65
FD50	57	LB10CG	56	LL7ATCG	37	PEF series	53
FD75	57	LB17F7	56	LL7CG	56	PEM50 series	53
FD75	66	LB1ACG	55	LL87F7	56	PHS series	30
FDA75	66	LB1CA	37	LL8ACG	55	PS200SS304	71
FDC100	57	LB1CG	56	LL8ATCG	37	PS200SS304EH	71
FDC2-100	57	LB27F7	56	LL8CG	56	PS200SS316	71
FDC2-50	57	LB2ACG	55	LL97F7	56	PS200SS316EH	71
FDC2-75	57	LB2CA	37	LL9CG	56	PS6153-2GY	76
FDC50	57	LB2CG	56	LLCACG	55	PS6154-2GY	76
FDC75	57	LB37F7	56	LN (alum) series	47	PS707P	76
FDC75	66	LB3CA	37	LN series	47	PS86*	75
FDC75	66	LB3CAG	55	LR107F7	56	PS93*	75
FDDX75	66	LB3CG	56	LR10ACG	55	PS94*	75
FDS75	66	LB47F7	56	LR10CG	56	PS9402	74
FDX75	66	LB4ACG	55	LR10TCG	37	PS9403	74
FF series	65	LB4CA	37	LR17F7	56	PS9404	74
FJ103	76	LB4CG	56	LR1ACG	55	RA series	58
FJ108	76	LB57F7	56	LR1CA	37	RB series	59
FS100	57	LB5ACG	55	LR1CG	56	RE series	53-54
FS2-100	57	LB5CA	37	LR27F7	56	S050	48
FS2-50	57	LB5CG	56	LR2ACG	55	S075	48
FS2-75	57	LB67F7	56	LR2CA	37	S100	48
FS50	57	LB6ACG	55	LR2CG	56	S1010RT	39
FS75	57	LB6CA	37	LR37F7	56	S1011RT	39
FSC100	57	LB6CG	56	LR3ACG	55	S1012RT	39
FSC2-100	57	LB77F7	56	LR3CA	37	S1013RT	39
FSC2-50	57	LB7ACG	55	LR3CG	56	S1014RT	39
FSC2-75	57	LB7ATCG	37	LR47F7	56	S1015DRT	39
FSC50	57	LB7CG	56	LR4ACG	55	S1015ERT	39
FSC75	57	LB87F7	56	LR4CA	37	S1015FRT	39
FSFD series	57	LB8ACG	55	LR4CG	56	S1015RT	39
FSFD2 series	57	LB8ATCG	37	LR57F7	56	S1016RT	39
FW	27	LB8CG	56	LR5ACG	55	S1017RT	39
FWB	27	LB97F7	56	LR5CA	37	S1018RT	39
GB100L	69	LB9CG	56	LR5CG	56	S1019RT	39
GB100S	69	LL107F7	56	LR67F7	56	S1020RT	39
GB125L	69	LL10ACG	55	LR6ACG	55	S1021DRT	39
GB125S	69	LL10ATCG	37	LR6CA	37	S1021ERT	39
GB150L	69	LL10CG	56	LR6CG	56	S1021FRT	39
GB150S	69	LL17F7	56	LR77F7	56	S1021RT	39
GB200S	69	LL1ACG	55	LR7ACG	55	S1110	38
GB50L	69	LL1CA	37	LR7ATCG	37	S1111	38
GB50S	69	LL1CG	56	LR7CG	56	S1112	38
GB75L	69	LL27F7	56	LR87F7	56	S1112A	38
GB75S	69	LL2ACG	55	LR8ACG	55	S1112B	38
GUAB100SS	69	LL2CA	37	LR8ATCG	37	S1112C	38
GUAB75SS	69	LL2CG	56	LR8CG	56	S1112D	38
GUAC100SS	69	LL37F7	56	LR97F7	56	S1112E	38
GUAC75SS	69	LL3ACG	55	LR9CG	56	S1112F	38
GUAL100SS	69	LL3CA	37	LTC series	60	S1113	39
GUAL75SS	69	LL3CG	56	NIP series	64	S1114	39
GUAT100SS	69	LL47F7	56	NP (AL) series	43-44	S1115	39
GUAT75SS	69	LL4ACG	55	NP series	40-42	S1115A	39
GUAX100SS	69	LL4CA	37	NTC series	52	S1115B	39
GUAX75SS	69	LL4CG	56	NTCC series	52	S1115C	39
HDLED-HEAD	27	LL57F7	56	OSN100	48	S1115D	39
HVPB series	10-11	LL5ACG	55	OSN125	48	S1115E	39
HWA series	62	LL5CA	37	OSN50	48	S1115F	39
JC series	58	LL5CG	56	OSN75	48	S125	48
JTB375	67	LL67F7	56	P2749	76	S150	48
JTB500	67	LL6CA	37	P2751	76	S200	48

Numerical Index

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
S250	48	SA31	31	SS27	32	T37F7	56
S300	48	SA31A1	32	SS27A1	33	T3ACG	55
S350	48	SA31A3	33	SS28	32	T3CA	37
S3A4-1000N	34	SA32-2N	32	SS28A1	33	T3CG	56
S3A4-250N	34	SA32	31	SS29	32	T47F7	56
S3A4-350N	34	SA32A1	32	SS29A1	33	T4ACG	55
S3A4-600N	34	SA32A3	33	SS2C	32	T4CA	37
S3A4-800N	34	SA34-2N	32	SS30	32	T4CG	56
S400	48	SA34	31	SS30A1	33	T57F7	56
S4060RT	39	SA34A1	32	SS31	32	T5ACG	55
S4061RT	39	SA34A3	33	SS31A1	33	T5CA	37
S4062RT	39	SA350-2NS	34	SS32	32	T5CG	56
S4063RT	39	SA350	34	SS32A1	33	T67F7	56
S4064RT	39	SA36-2N	32	SS34	32	T6ACG	55
S4065DRT	39	SA36	31	SS34A1	33	T6CA	37
S4065ERT	39	SA36A1	32	SS36	32	T6CG	56
S4065FRT	39	SA36A3	33	SS36A1	33	T77F7	56
S4065RT	39	SA39-2N	32	SS39	32	T7ACG	55
S4066	39	SA39	31	SS39A1	33	T7CG	56
S4067	39	SA39A3	32	SS44	32	T87F7	56
S4068	39	SA39A5	33	SS44A1	33	T8ACG	55
S4069	39	SA44-2N	32	SS4C	32	T8CG	56
S4070	39	SA44	31	SS50	48	T91S	23
S4071	39	SA44A1	32	SS52	48	T91SC36	23
S4072	39	SA44A3	33	SS54	48	TPC series	66
S4073	39	SA45-2N	32	SS56	48	TRC series	52
S4075	39	SA46-2N	32	SS58	48	TRCC series	52
S4A4-1000N	34	SA4C	31	SS60	48	TS14-4-4	28
S4A4-600N	34	SA500	34	SS62	48	TS2-3/0-4	28
SA0	34	SA600-2NS	34	SS64	48	TS4/0-400-4	28
SA1000-2N	34	SA600	34	SS66	48	TS5-3-2/0-3	28
SA1000	34	SA6C	31	SS68	48	TS5-3/0-400-3	28
SA1C-2N	32	SA6S	34	SS6C	32	TS5-500-1000-3	28
SA1C	31	SA800-2N	34	SSL series	32	TS500-1000-4	28
SA2	34	SA800	34	SU0	34	TT	27
SA2/0	34	SAL series	31	SU1000-2NS	34	TWH series	51
SA25-2N	32	SB2-300	34	SU1000	34	TWIN632S	23
SA25	31	SB2-600	34	SU2/0	34	TWIN635S	23
SA250	34	SB2-800	34	SU250	34	UB100	73
SA26-2N	32	SB3-600	34	SU350-2N	34	UB125	73
SA26	31	SB4-600	34	SU350	34	UB150	73
SA26A1	32	SB4-800	34	SU600-2NS	34	UB200	73
SA26A3	33	SDL40HDLED	27	SU600	34	UB250	73
SA27-2N	32	SDL40P	27	SU800-2NS	34	UB300	73
SA27	31	SDL40PLED	27	SU800	34	UB350	73
SA27A3	32	SDL60HDLED	27	SWEET (AL) series	42	UB400	73
SA27A5	33	SDL60P	27	SWEET (EMT) series	36	UB50	73
SA28-2N	32	SDL60PLED	27	SWEET series	40	UB75	73
SA28	31	SG10-115RG-LED	26	SWV4R	45	UF100A	59
SA28A3	32	SG10-115RG	26	SWV4S	45	UF100S	59
SA28A5	33	SG20-115RG-LED	26	SYP series	33	UF50A	59
SA29-2N	32	SG20-115RG	26	SYPO series	33	UF50S	59
SA29	31	SG30-115RG-LED	26	T107F7	56	UF75A	59
SA29A1	32	SG30-115RG	26	T10ACG	55	UF75S	59
SA29A3	33	SGB series	46	T10CG	56	UM100A	59
SA2C-2N	32	SLT series	61	T17F7	56	UM100S	59
SA2C	31	SPSR (SS) series	70	T1ACG	55	UM50A	59
SA30-2N	32	SPSR series	29	T1CA	37	UM50S	59
SA30	31	SR series	48	T1CG	56	UM75A	59
SA300	34	SS1C	32	T27F7	56	UM75S	59
SA30A3	32	SS25	32	T2ACG	55	WCSS series	29
SA30A3	33	SS26	32	T2CA	37	WH series	51
SA31-2N	32	SS26A1	33	T2CG	56		

Summit Electric Products Ltd. – Sales Representatives

ALBERTA

Please contact Summit Electric

Phone: 1-800-265-4822 Fax: (519) 250-8389

Email: sales@summit-electric.com

MANITOBA & N.W. ONTARIO

Douglas A. Ligertwood Ltd.

832 St. Mary's Road

Winnipeg, MB R2M 3P4

Peter Ligertwood

Phone: (204) 233-6873 Fax: (204) 237-0996

Cell: (204) 228-5487

Email: office@daligertwood.com

NEWFOUNDLAND

E.L.P. Marketing Ltd.

PO Box 799

41 Badcock Blvd

Bay Roberts, NL A0A 1G0

Robert Norman

Cell: (709) 746-5919

Email: rob@elp.ns.ca

ONTARIO

Humelec Associates Ltd.

755 The Queensway Ave. East, Unit 25

Mississauga, ON L4Y 4C5

Phone: (905) 276-3301

Fax: (905) 276-7013

Bill Eckersley

Email: beckersley@humelec.ca

Bruno Neale

Email: bneale@humelec.ca

QUEBEC

Promellis Inc.

99 Emilien-Marcoux, Suite #104

Blainville, QC J7C 0B4

Fax: (514) 745-4069

Sabastien Paquette

Phone: (514) 745-0259 ext 106

Email: spaquette@promellis.com

Mathieu St-Onge

Phone: (514) 745-0259 ext 102

Email: mstonge@promellis.com

BRITISH COLUMBIA

Division 16 Sales Agency

23017 Olund Crescent

Maple Ridge, BC V2X 9L3

Phone: 1-604-908-5565

Email: kyle@div16.ca

NEW BRUNSWICK

E.L.P. Marketing Ltd.

28 Reade Street

Moncton, NB E1C 6R9

Tim Geldart C.E.T.

Cell: (506) 871-4090

Email: tgeldart@elp.ns.ca

NOVA SCOTIA

E.L.P. Marketing Ltd.

32 McQuade Lake Cr.

Bayers Lake Industrial Park

Halifax, NS B3S 1B6

Greg Drysdale C.E.T.

Cell: (902) 441-6449

Email: gdrysdale@elp.ns.ca

P. E. I.

E.L.P. Marketing Ltd.

28 Reade Street

Moncton, NB E1C 6R9

Tim Geldart C.E.T.

Cell: (506) 871-4090

Email: tgeldart@elp.ns.ca

SASKATCHEWAN

Advance Electrical Agency

2717B Wentz Avenue

Saskatoon, SK S7K 4B6

Darren Churchwell

Cell: (306) 653-0313 Fax: (306) 244-4070

Email: darren@advanceagency.net

Bob Fiesel

Cell: (306) 552-8686

Email: bob@advanceagency.net